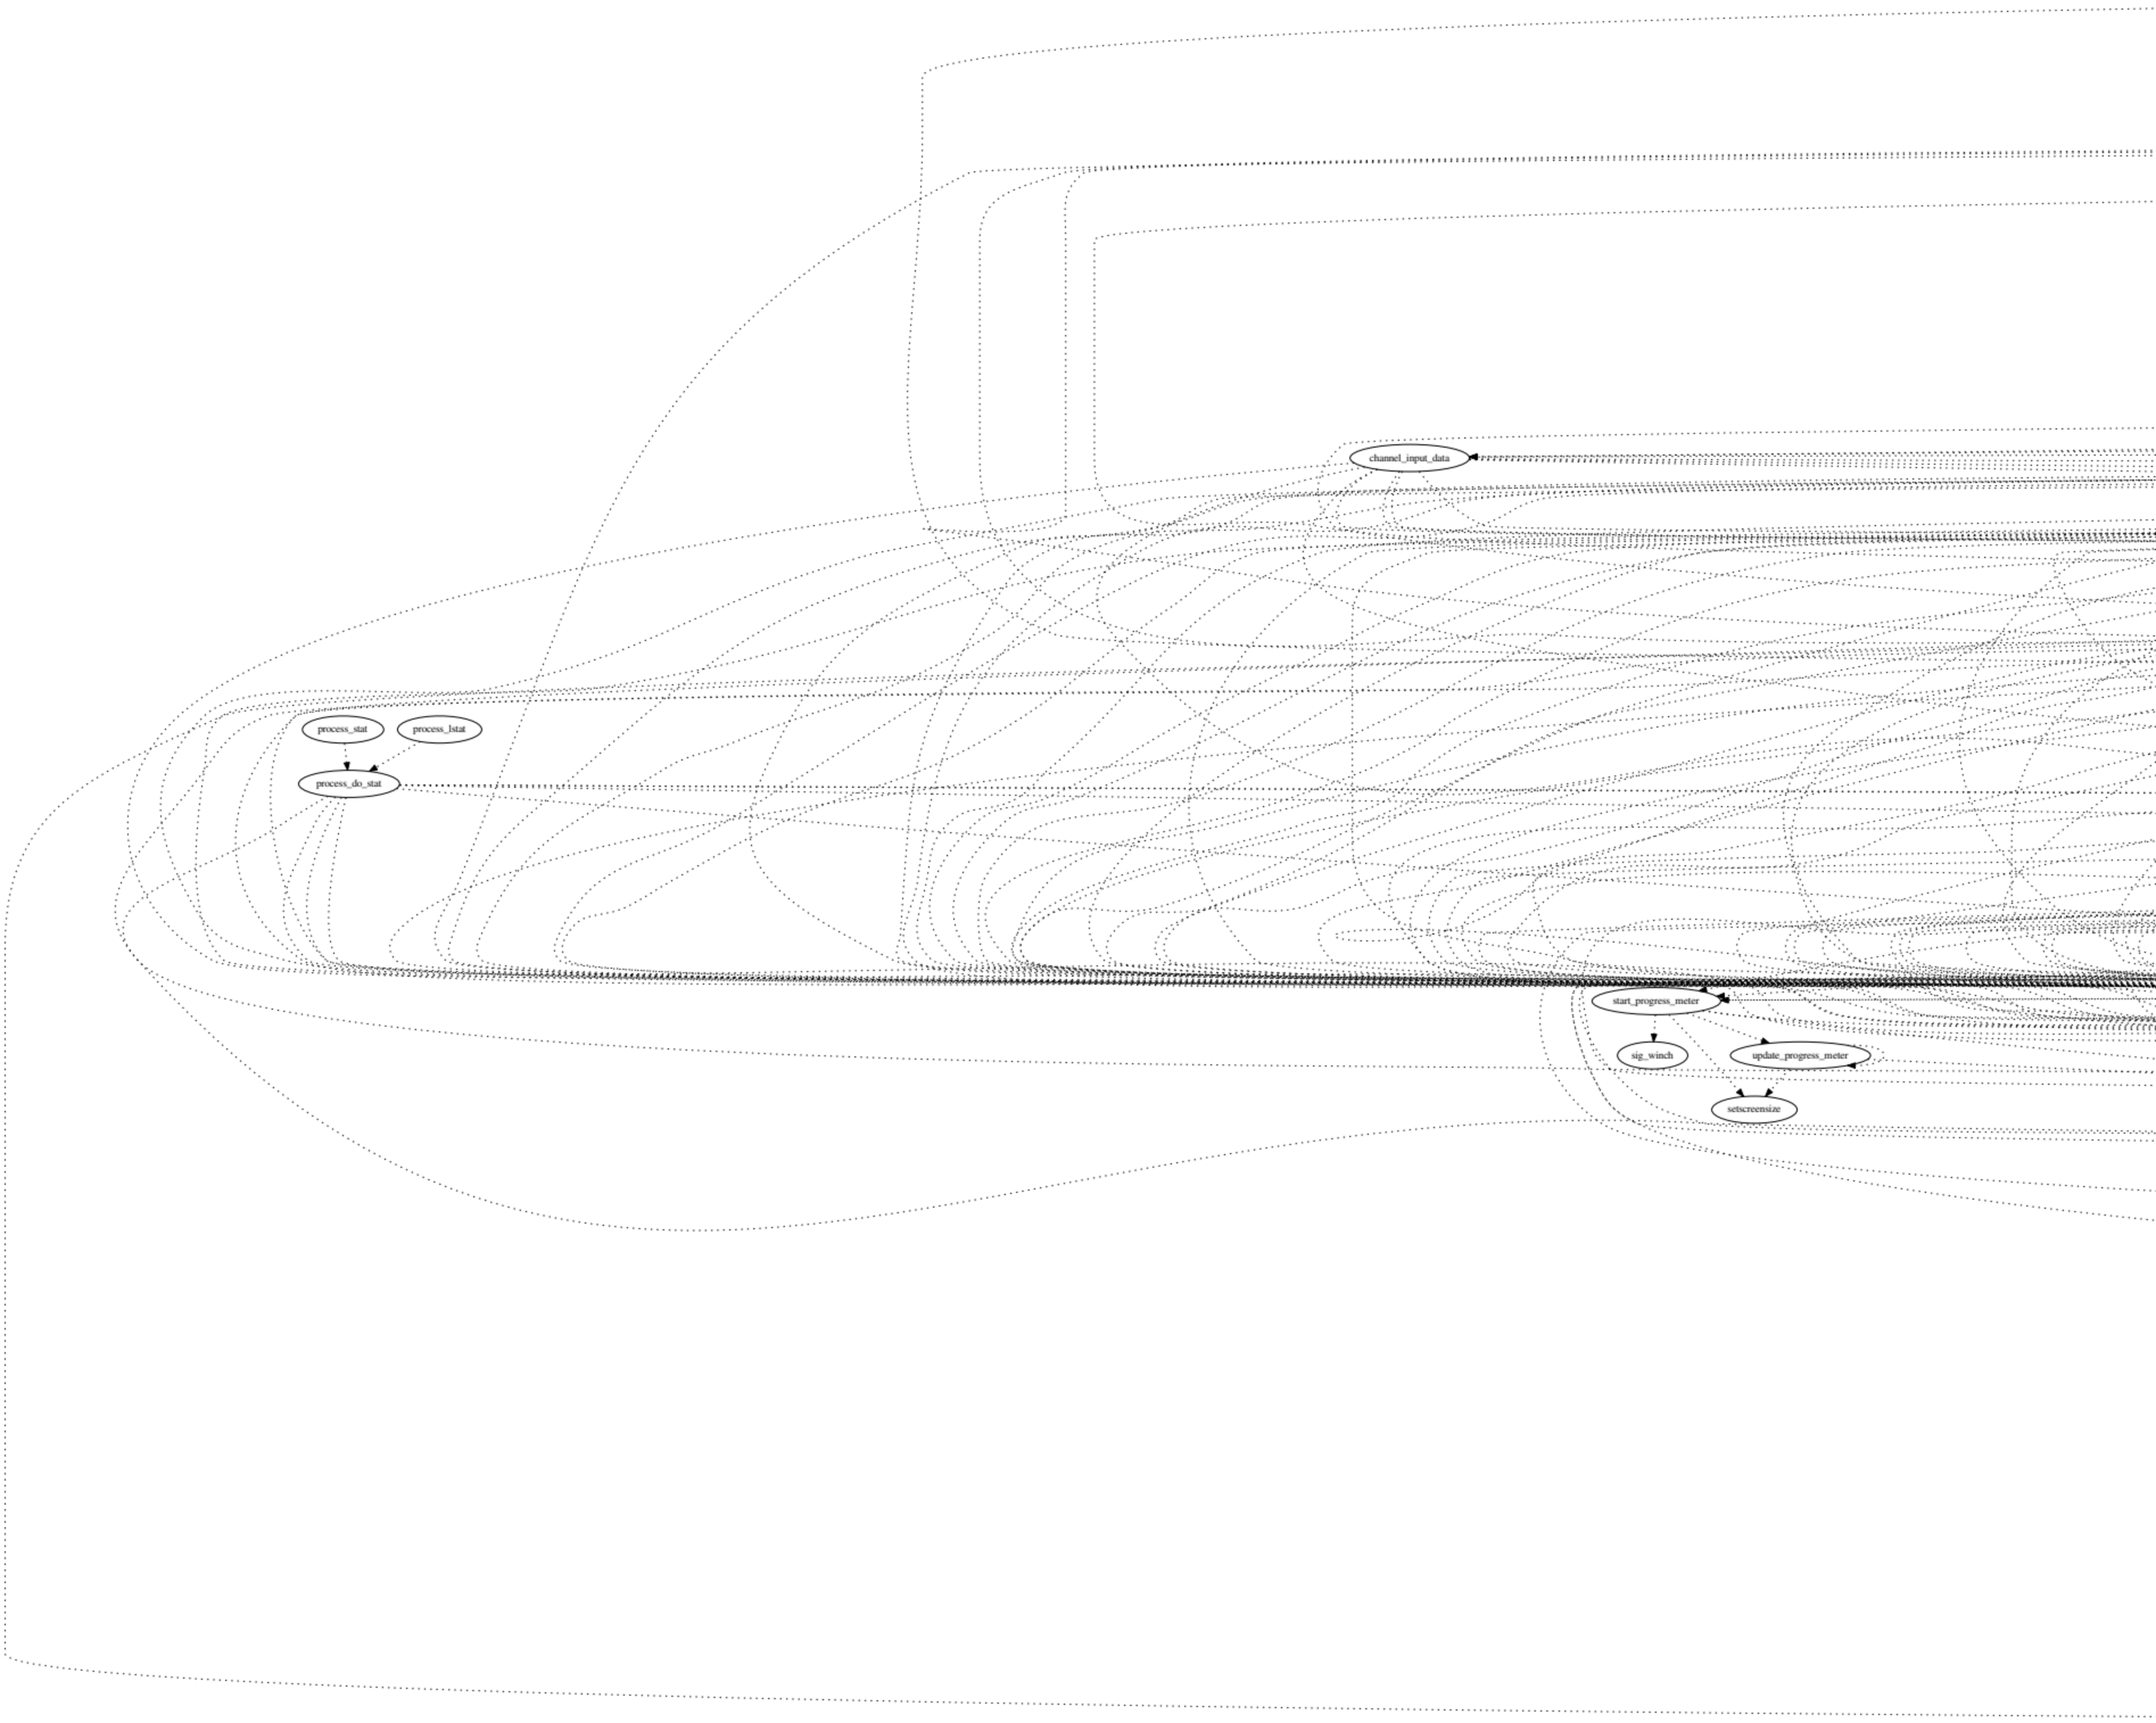
channel_input_data
process_stat
process_lstat
process_do_stat
start_progress_meter
sig_winch
update_progress_meter
setscreensize

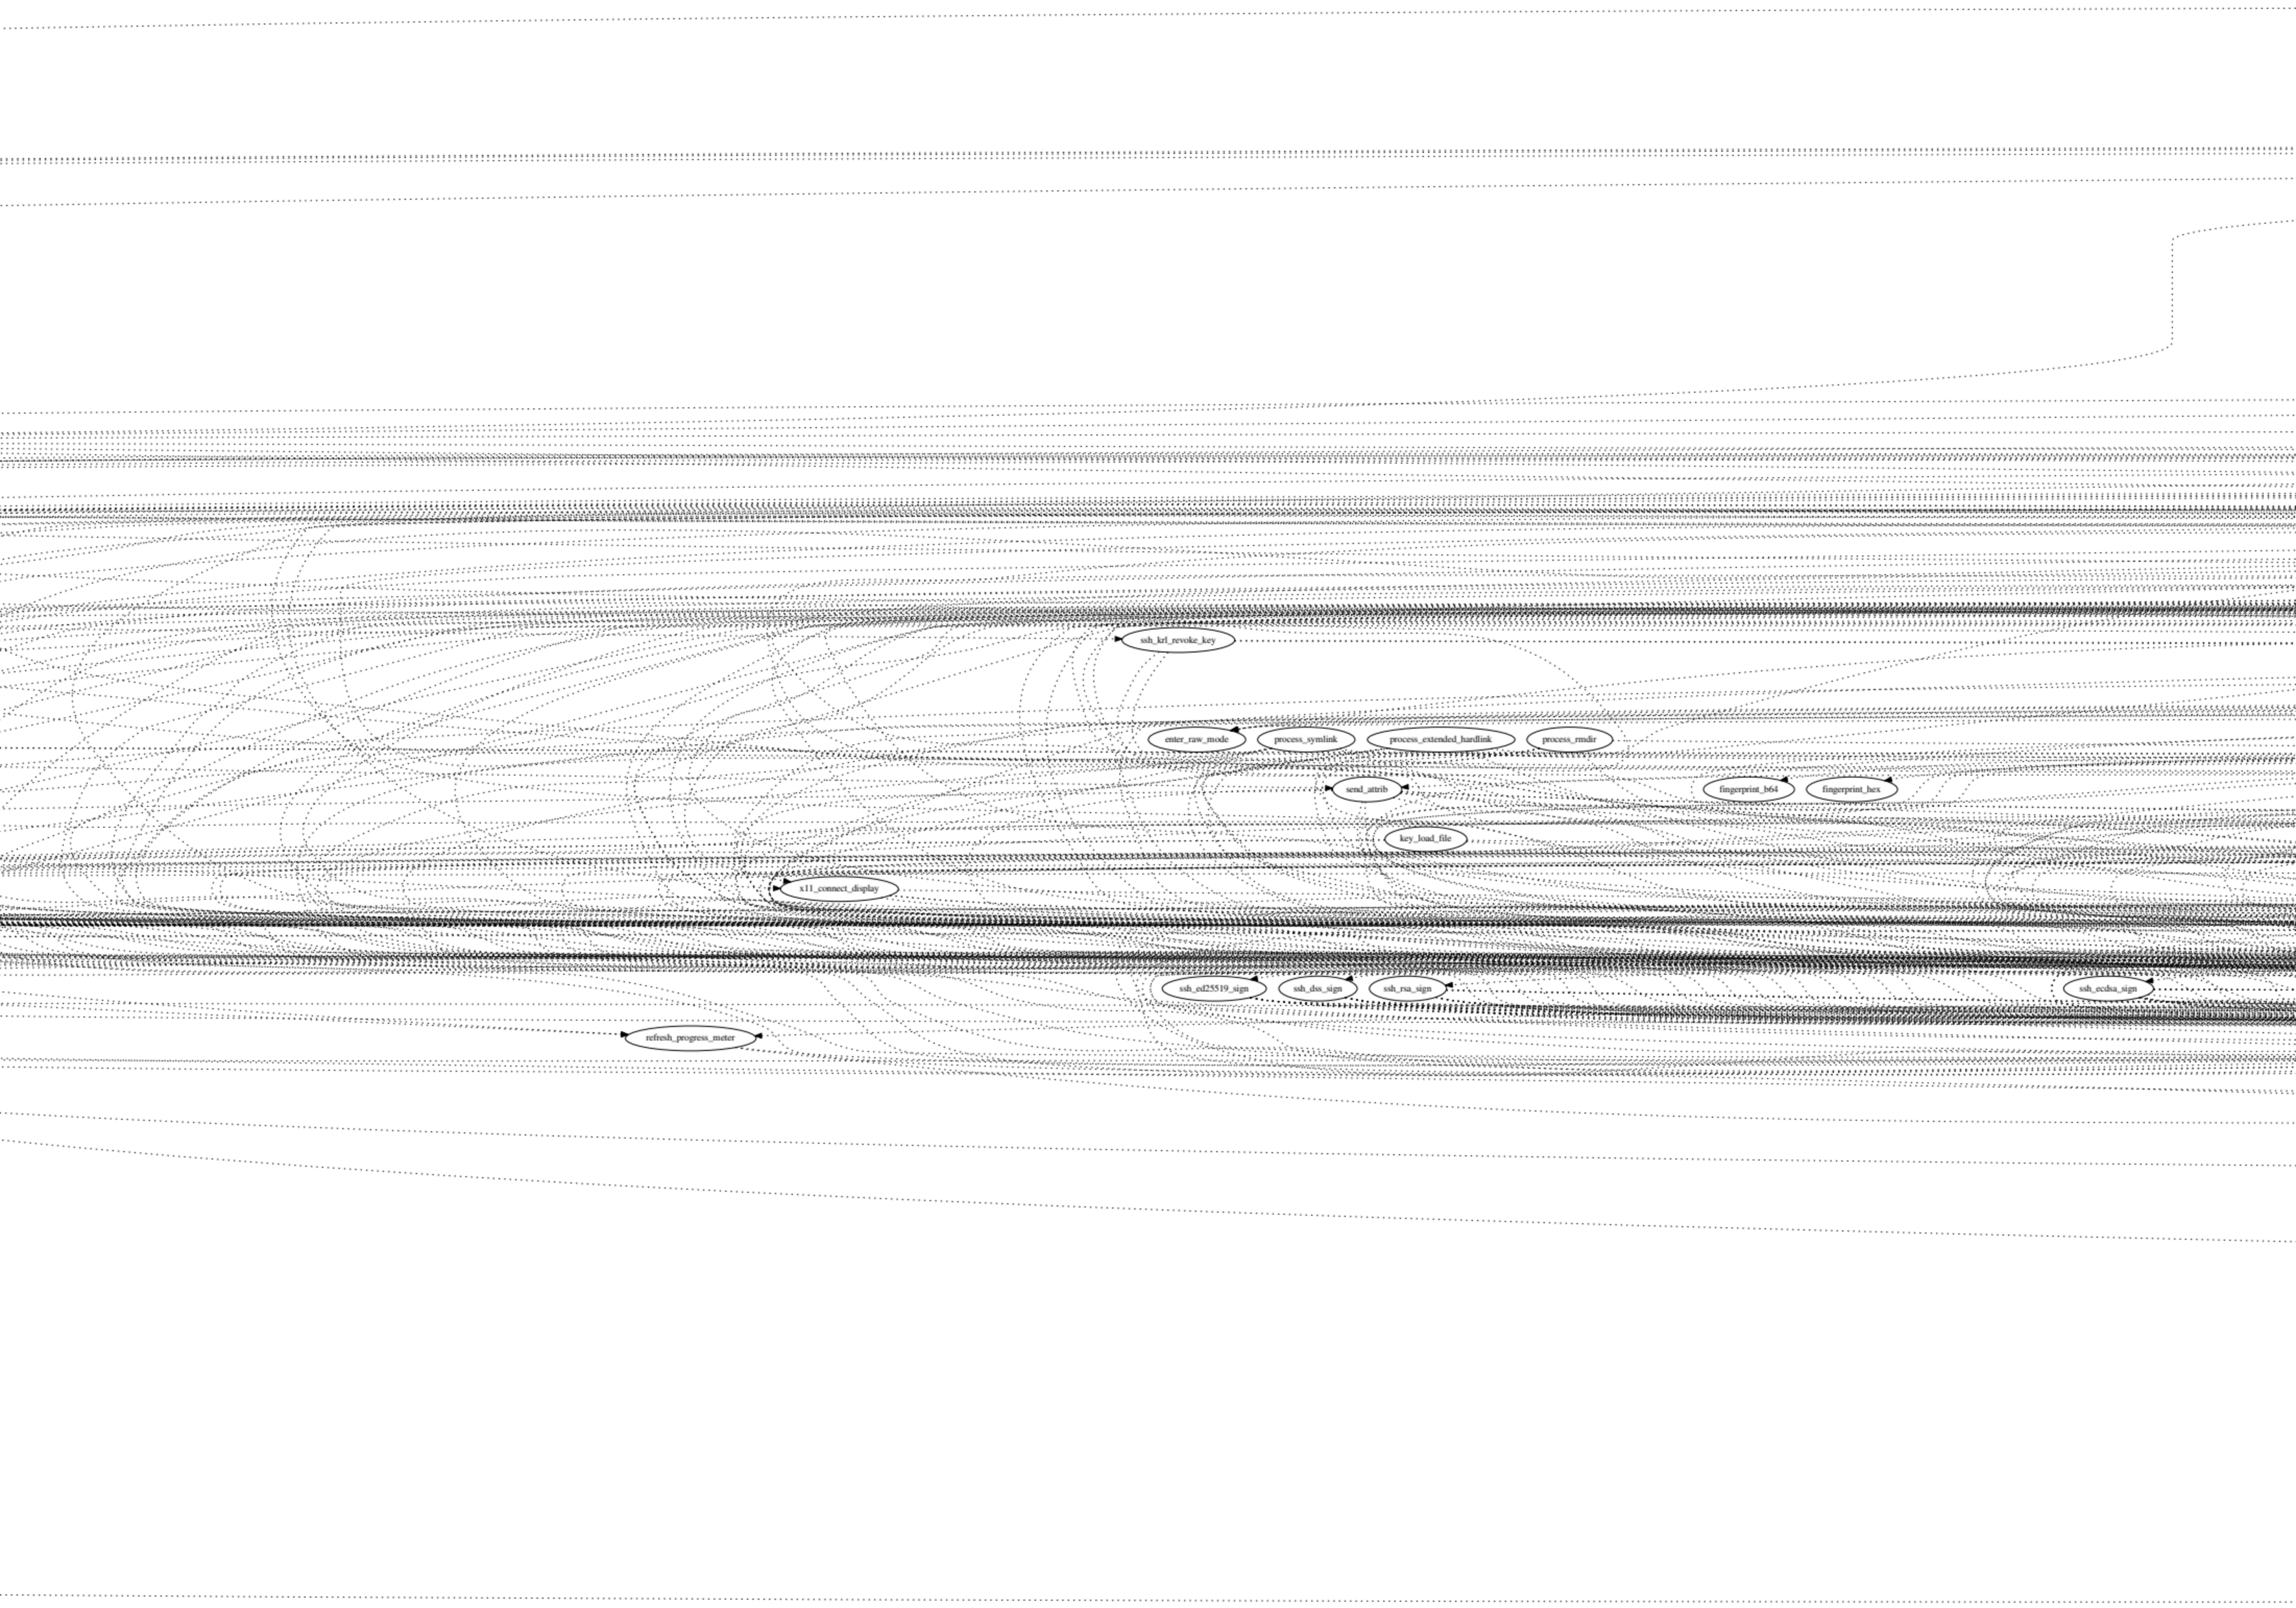
ssh_krl_revoke_key
enter_raw_mode
process_symlink
process_extended_hardlink
process_rmdir
send_attrib
fingerprint_b64
fingerprint_hex
key_load_file
x11_connect_display
ssh_ed25519_sign
ssh_dss_sign
ssh_rsa_sign
ssh_ecdsa_sign
refresh_progress_meter

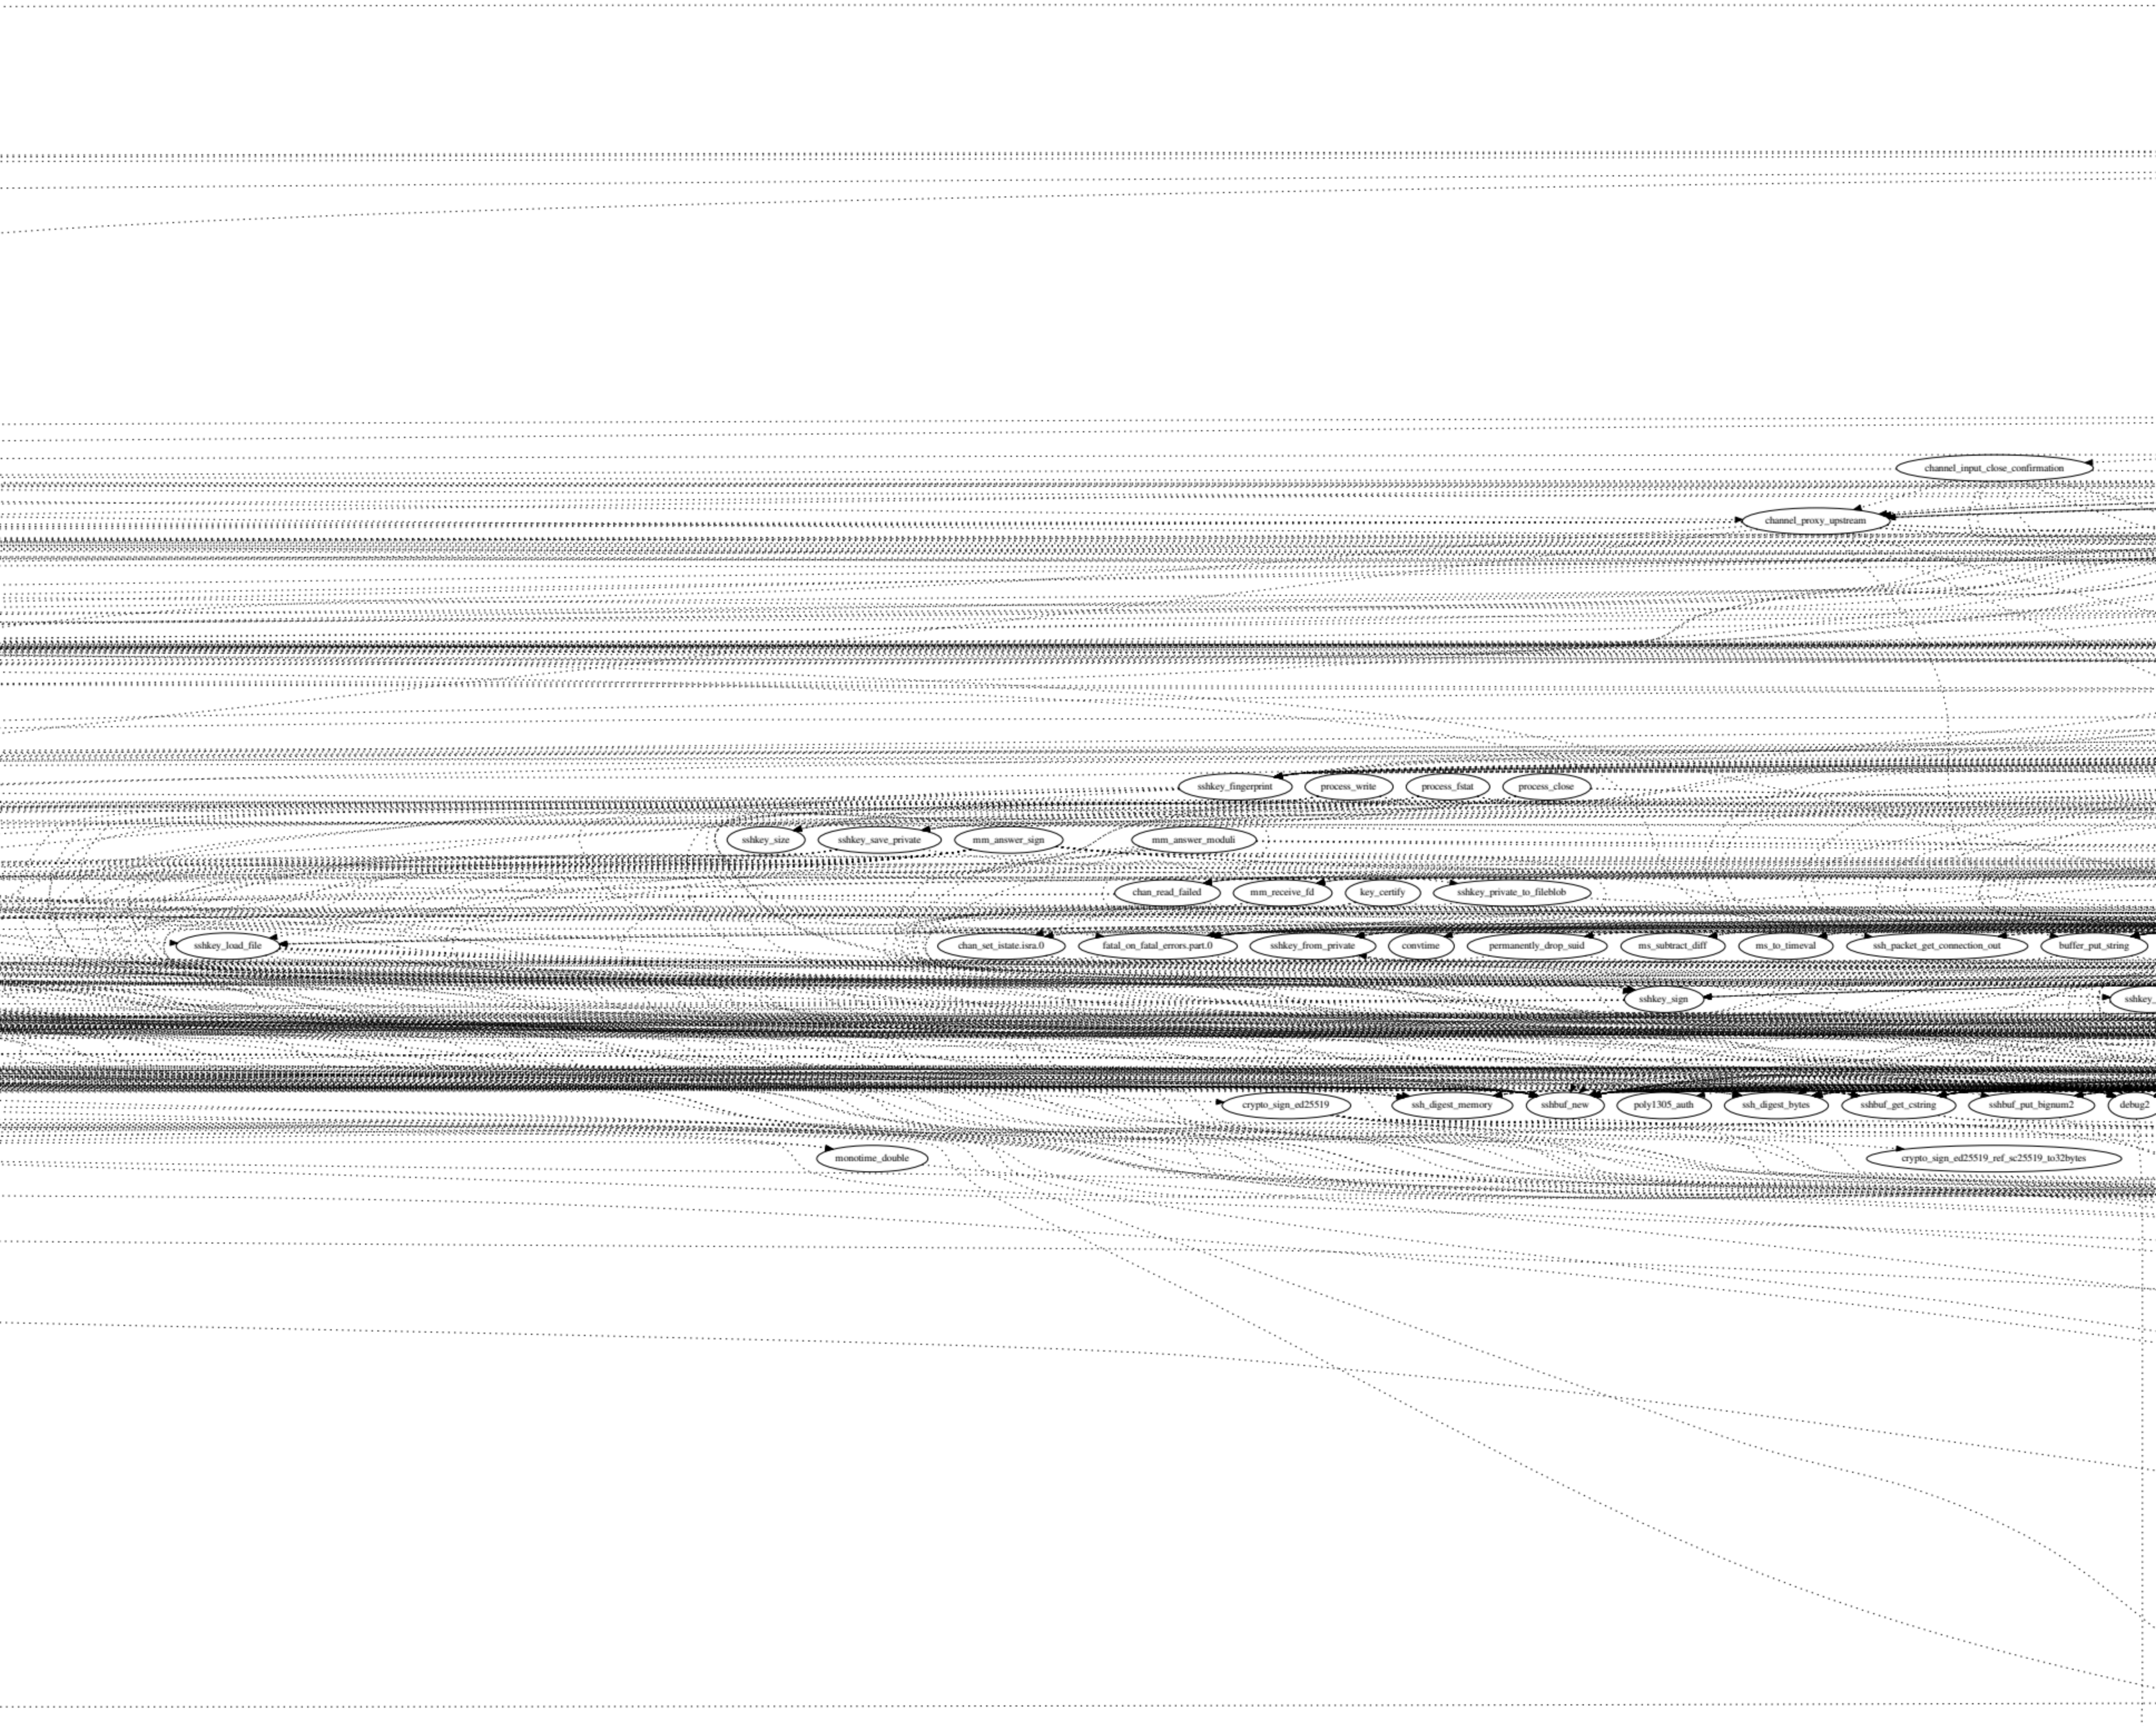
channel_input_close_confirmation
channel_proxy_upstream
sshkey_fingerprint
process_write
process_fstat
process_close
sshkey_size
sshkey_save_private
mm_answer_sign
mm_answer_moduli
chan_read_failed
mm_receive_fd
key_certify
sshkey_private_to_fileblob
sshkey_load_file
chan_set_istate.isra.0
fatal_on_fatal_errors.part.0
sshkey_from_private
convtime
permanently_drop_suid
ms_subtract_diff
ms_to_timeval
ssh_packet_get_connection_out
buffer_put_string
sshkey_sign
crypto_sign_ed25519
ssh_digest_memory
sshbuf_new
poly1305_auth
ssh_digest_bytes
sshbuf_get_cstring
sshbuf_put_bignum2
debug2
monotime_double
crypto_sign_ed25519_ref_sc25519_to32bytes

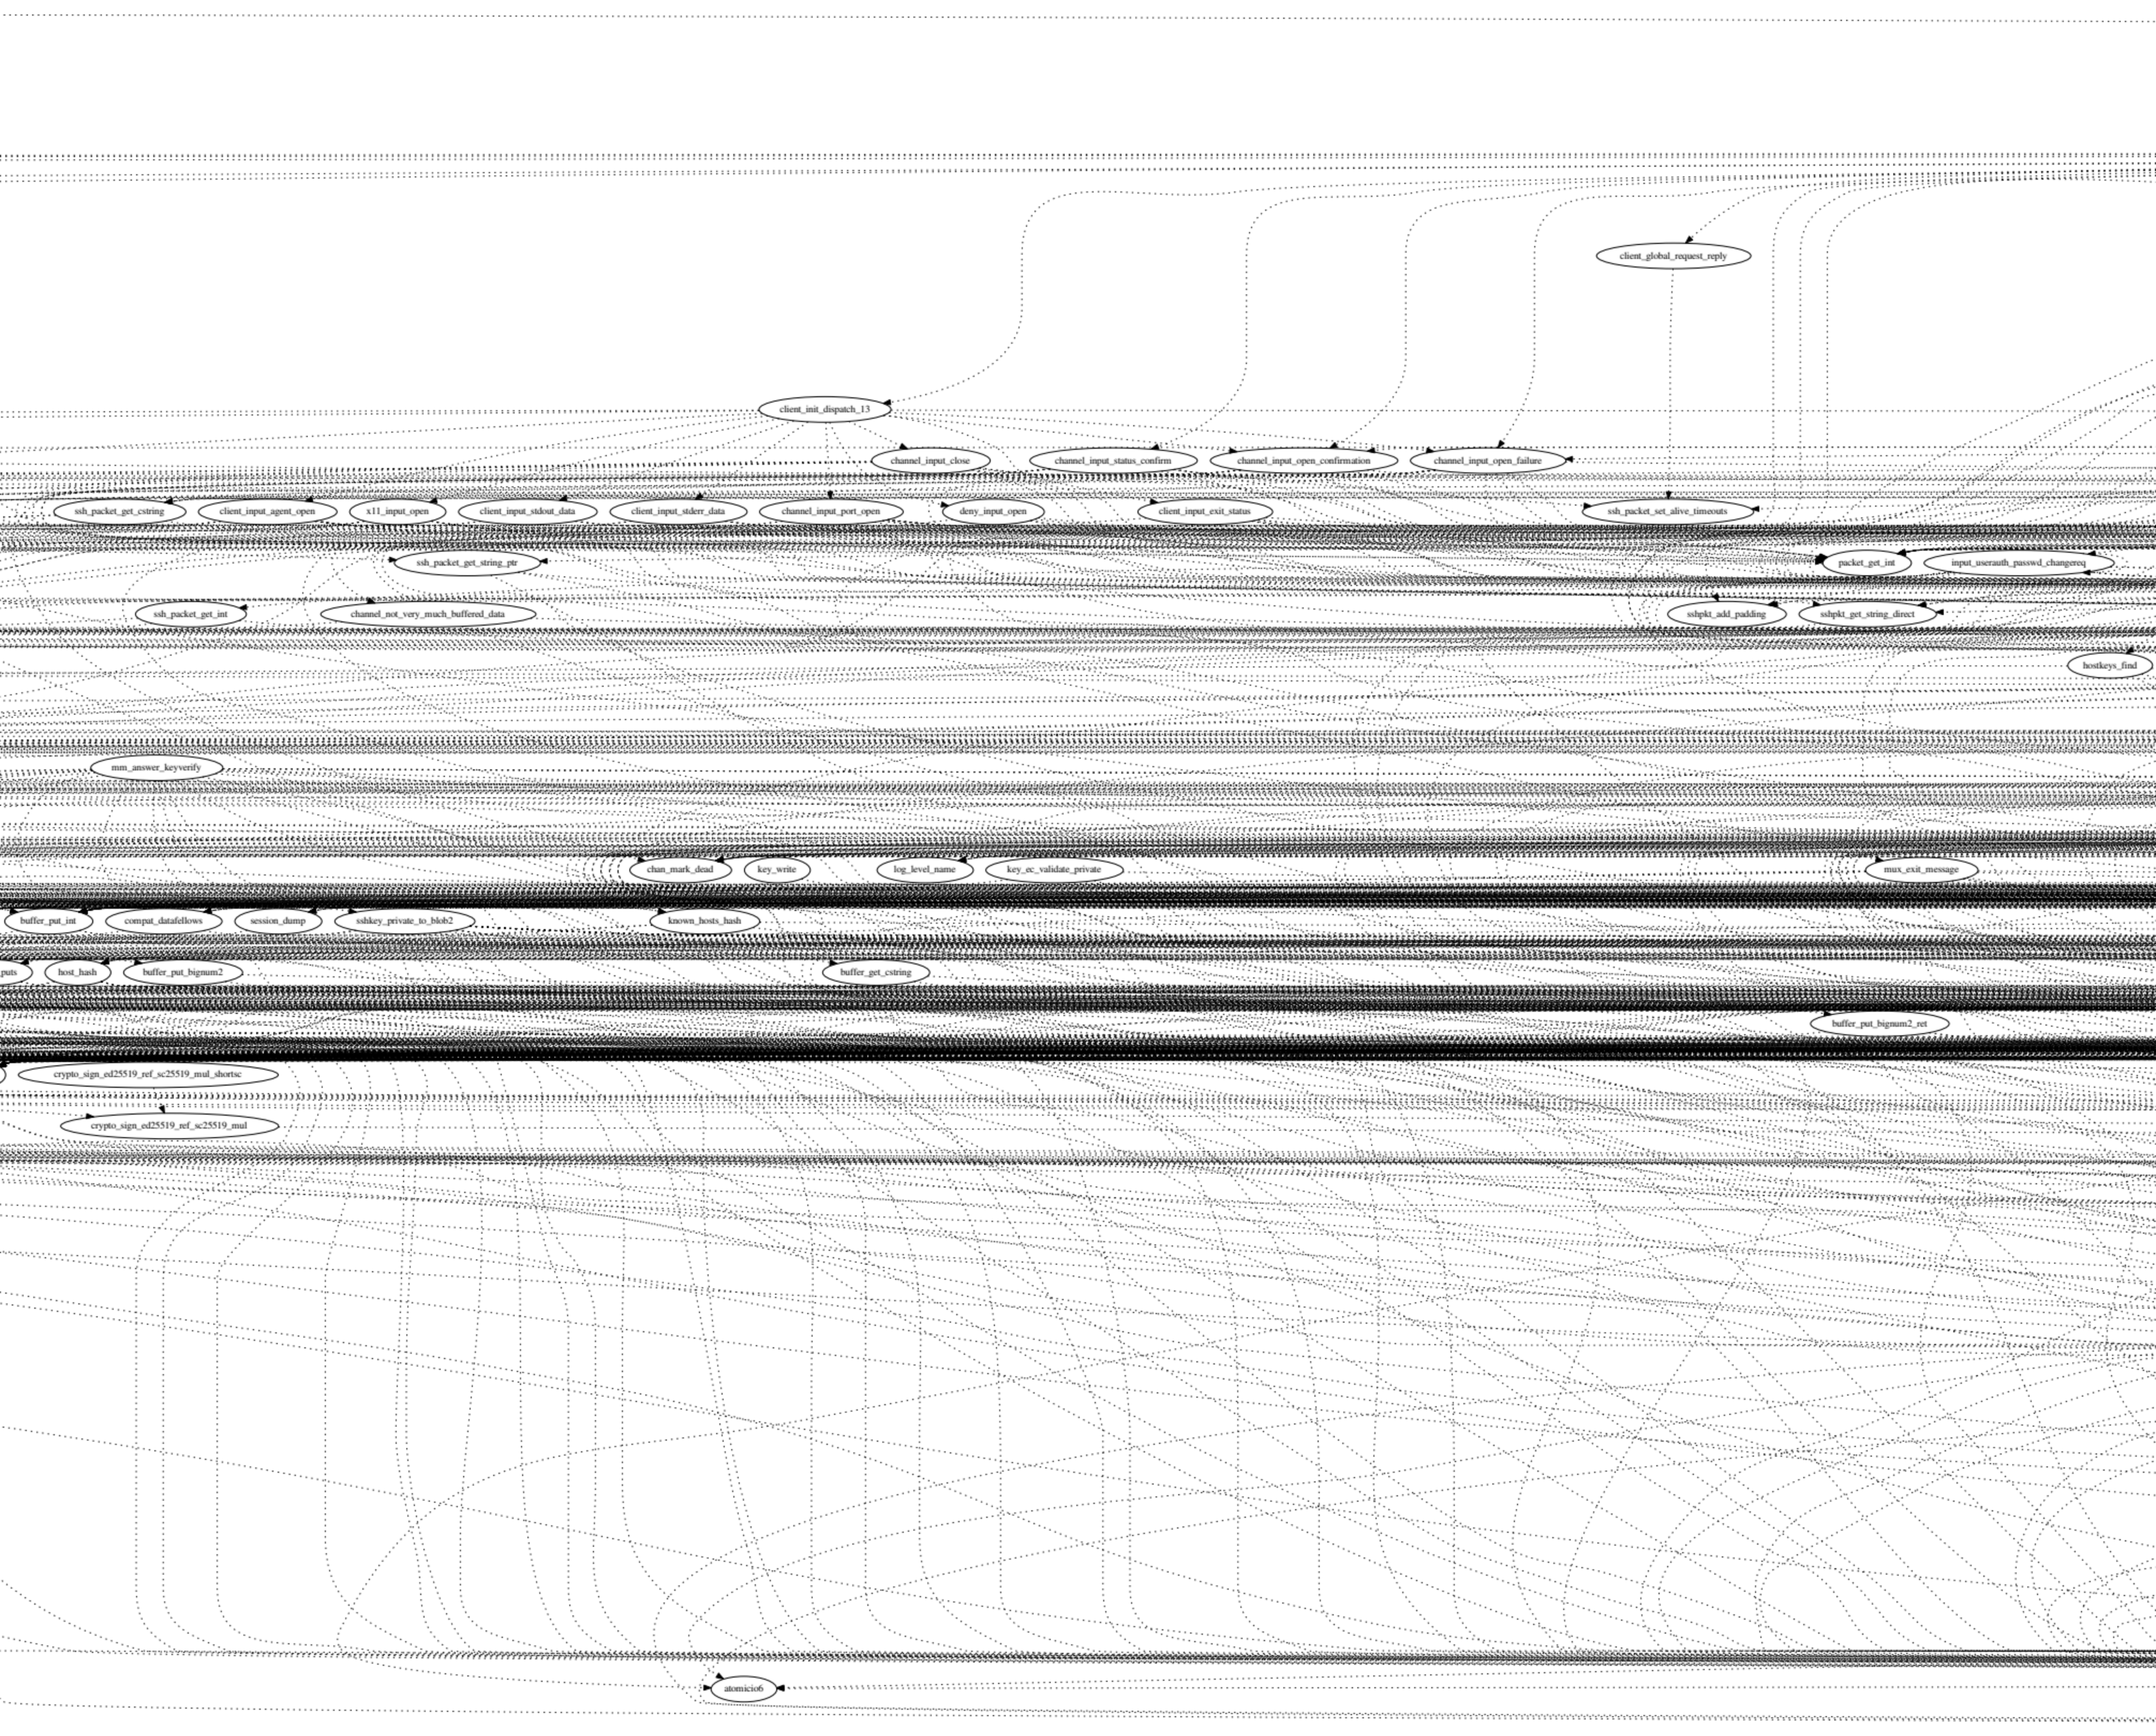
client_global_request_reply
client_init_dispatch_13
channel_input_close
channel_input_status_confirm
channel_input_open_confirmation
channel_input_open_failure
ssh_packet_get_cstring
client_input_agent_open
x11_input_open
client_input_stdout_data
client_input_stderr_data
channel_input_port_open
deny_input_open
client_input_exit_status
ssh_packet_set_alive_timeouts
ssh_packet_get_string_ptr
packet_get_int
input_userauth_passwd_changereq
ssh_packet_get_int
channel_not_very_much_buffered_data
sshpkt_add_padding
sshpkt_get_string_direct
hostkeys_find
mm_answer_keyverify
chan_mark_dead
key_write
log_level_name
key_ec_validate_private
mux_exit_message
buffer_put_int
compat_datafellows
session_dump
sshkey_private_to_blob2
known_hosts_hash
puts
host_hash
buffer_put_bignum2
buffer_get_cstring
buffer_put_bignum2_ret
crypto_sign_ed25519_ref_sc25519_mul_shortsc
crypto_sign_ed25519_ref_sc25519_mul
atomicio6

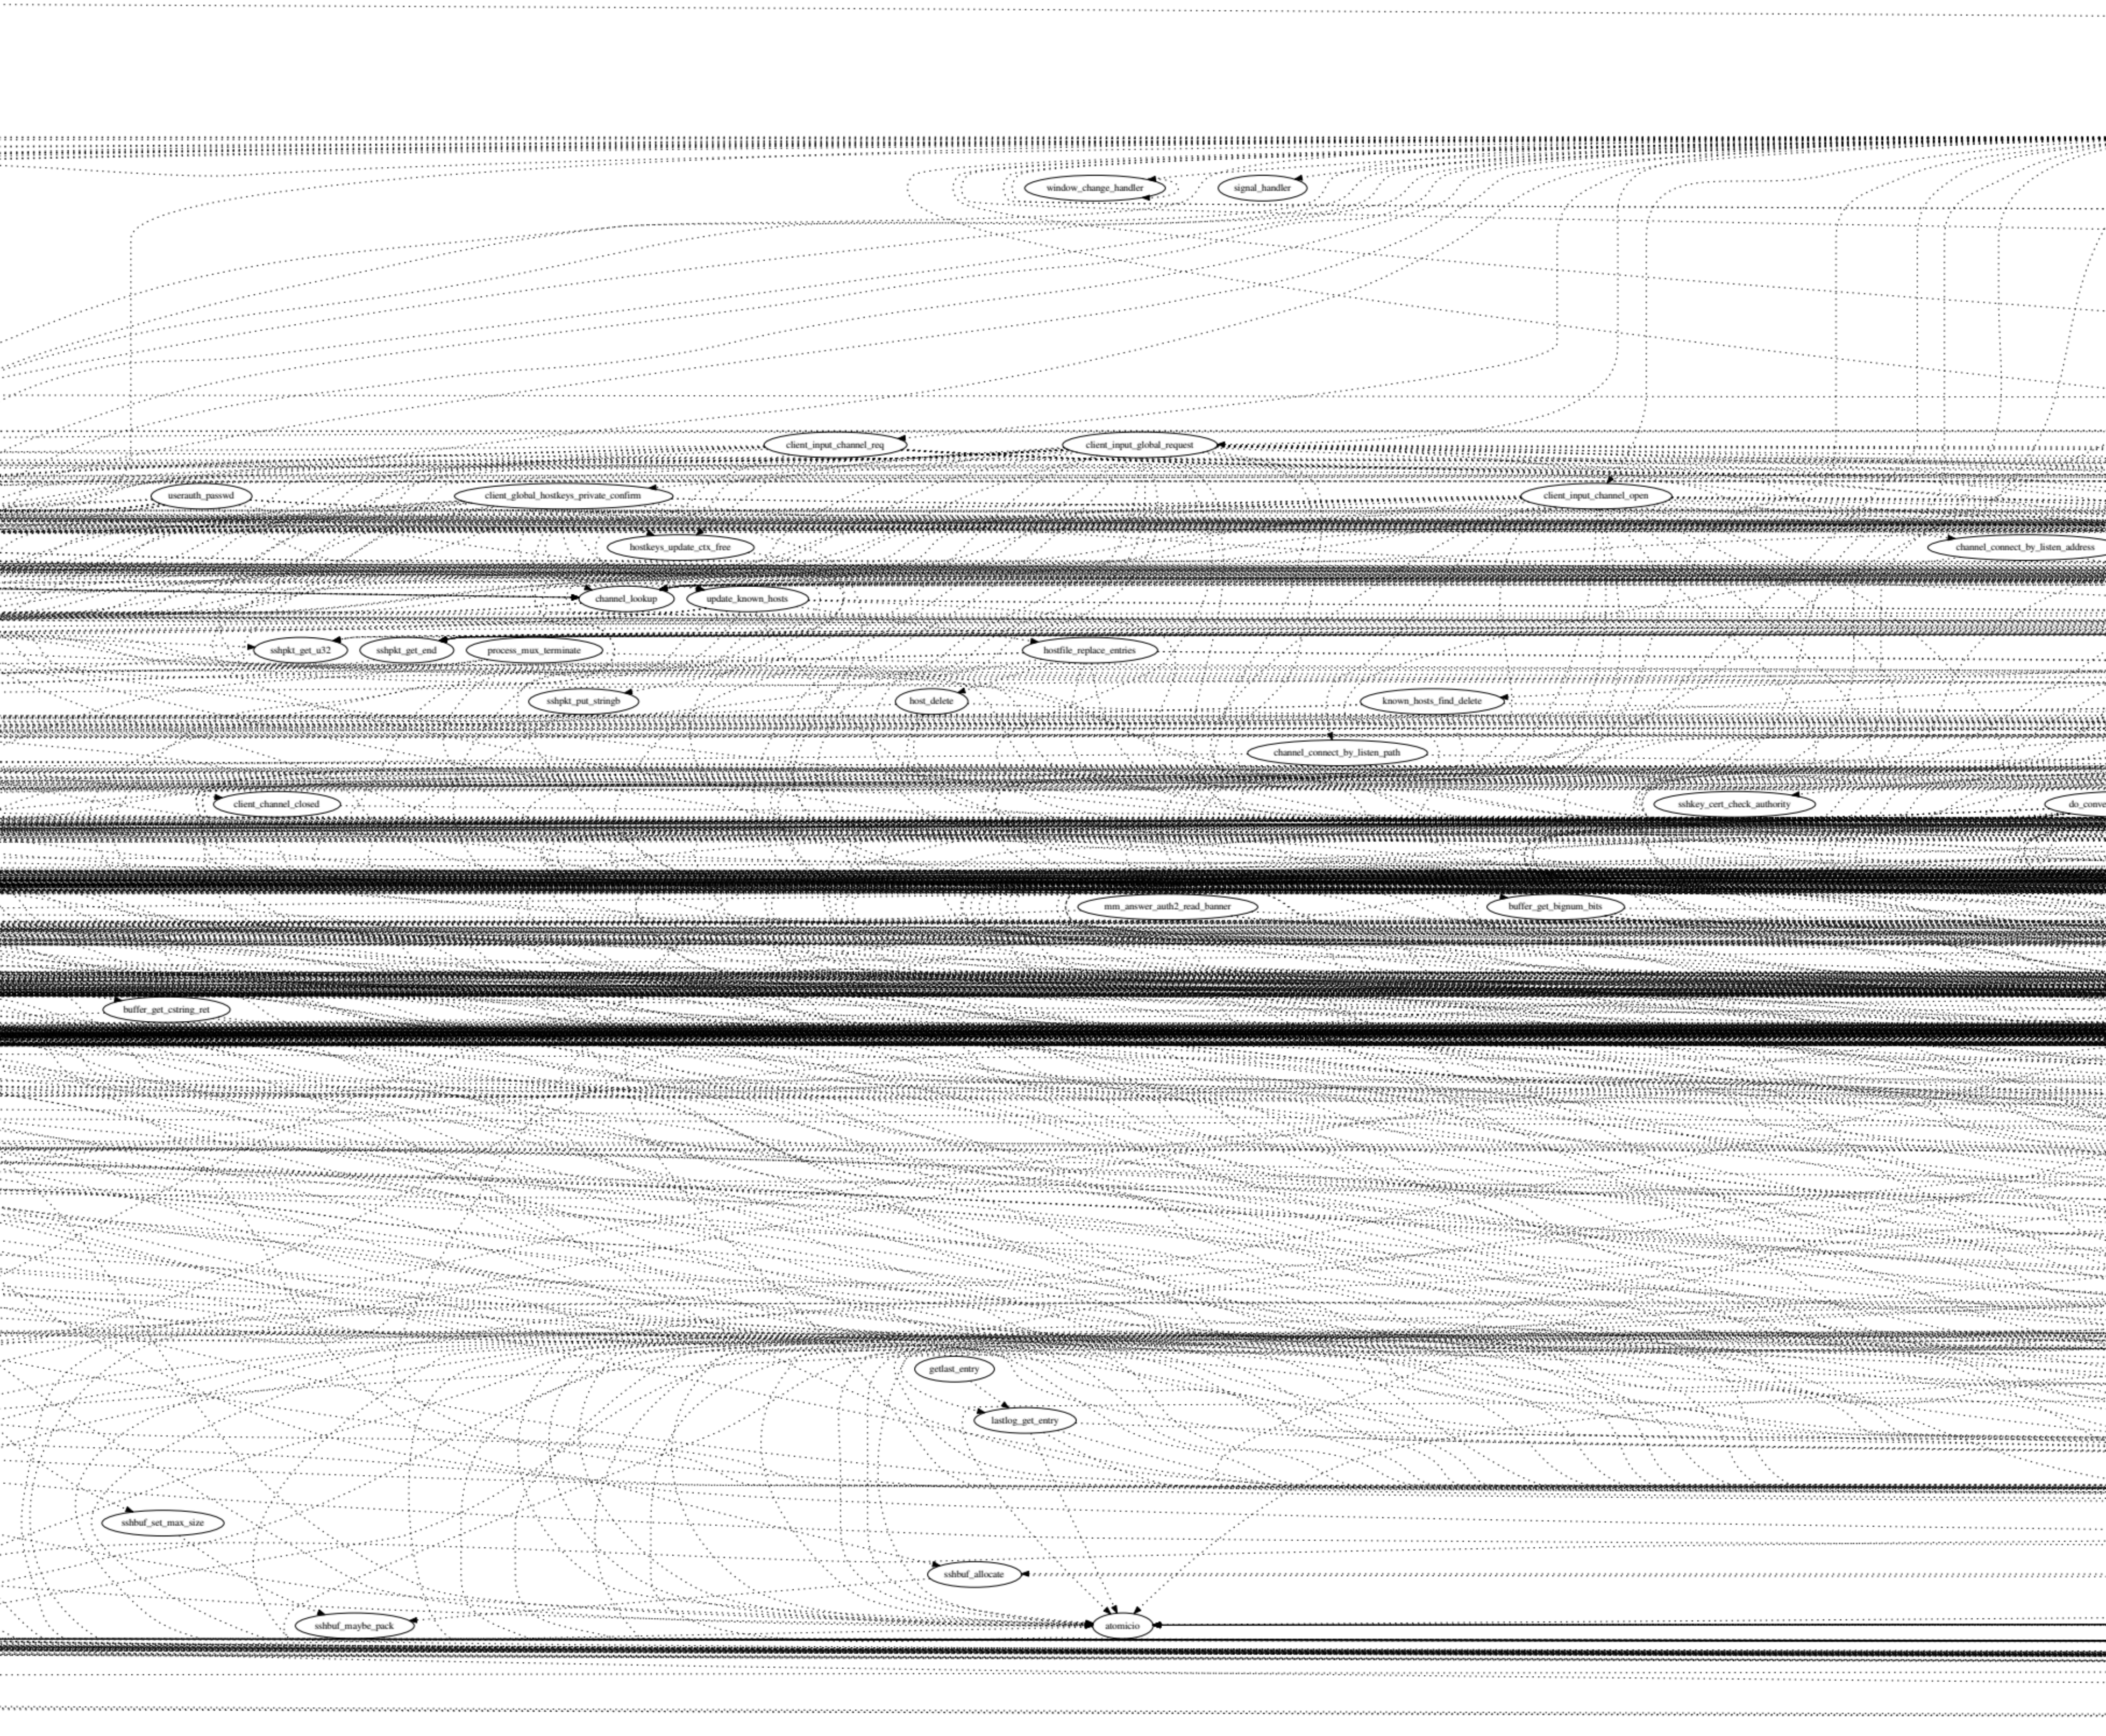
window_change_handler
signal_handler
client_input_channel_req
client_input_global_request
userauth_passwd
client_global_hostkeys_private_confirm
client_input_channel_open
hostkeys_update_ctx_free
channel_connect_by_listen_address
channel_lookup
update_known_hosts
sshpkt_get_u32
sshpkt_get_end
process_mux_terminate
hostfile_replace_entries
sshpkt_put_stringb
host_delete
known_hosts_find_delete
channel_connect_by_listen_path
client_channel_closed
sshkey_cert_check_authority
do_conve
mm_answer_auth2_read_banner
buffer_get_bignum_bits
buffer_get_cstring_ret
getlast_entry
lastlog_get_entry
sshbuf_set_max_size
sshbuf_allocate
sshbuf_maybe_pack
atomicio

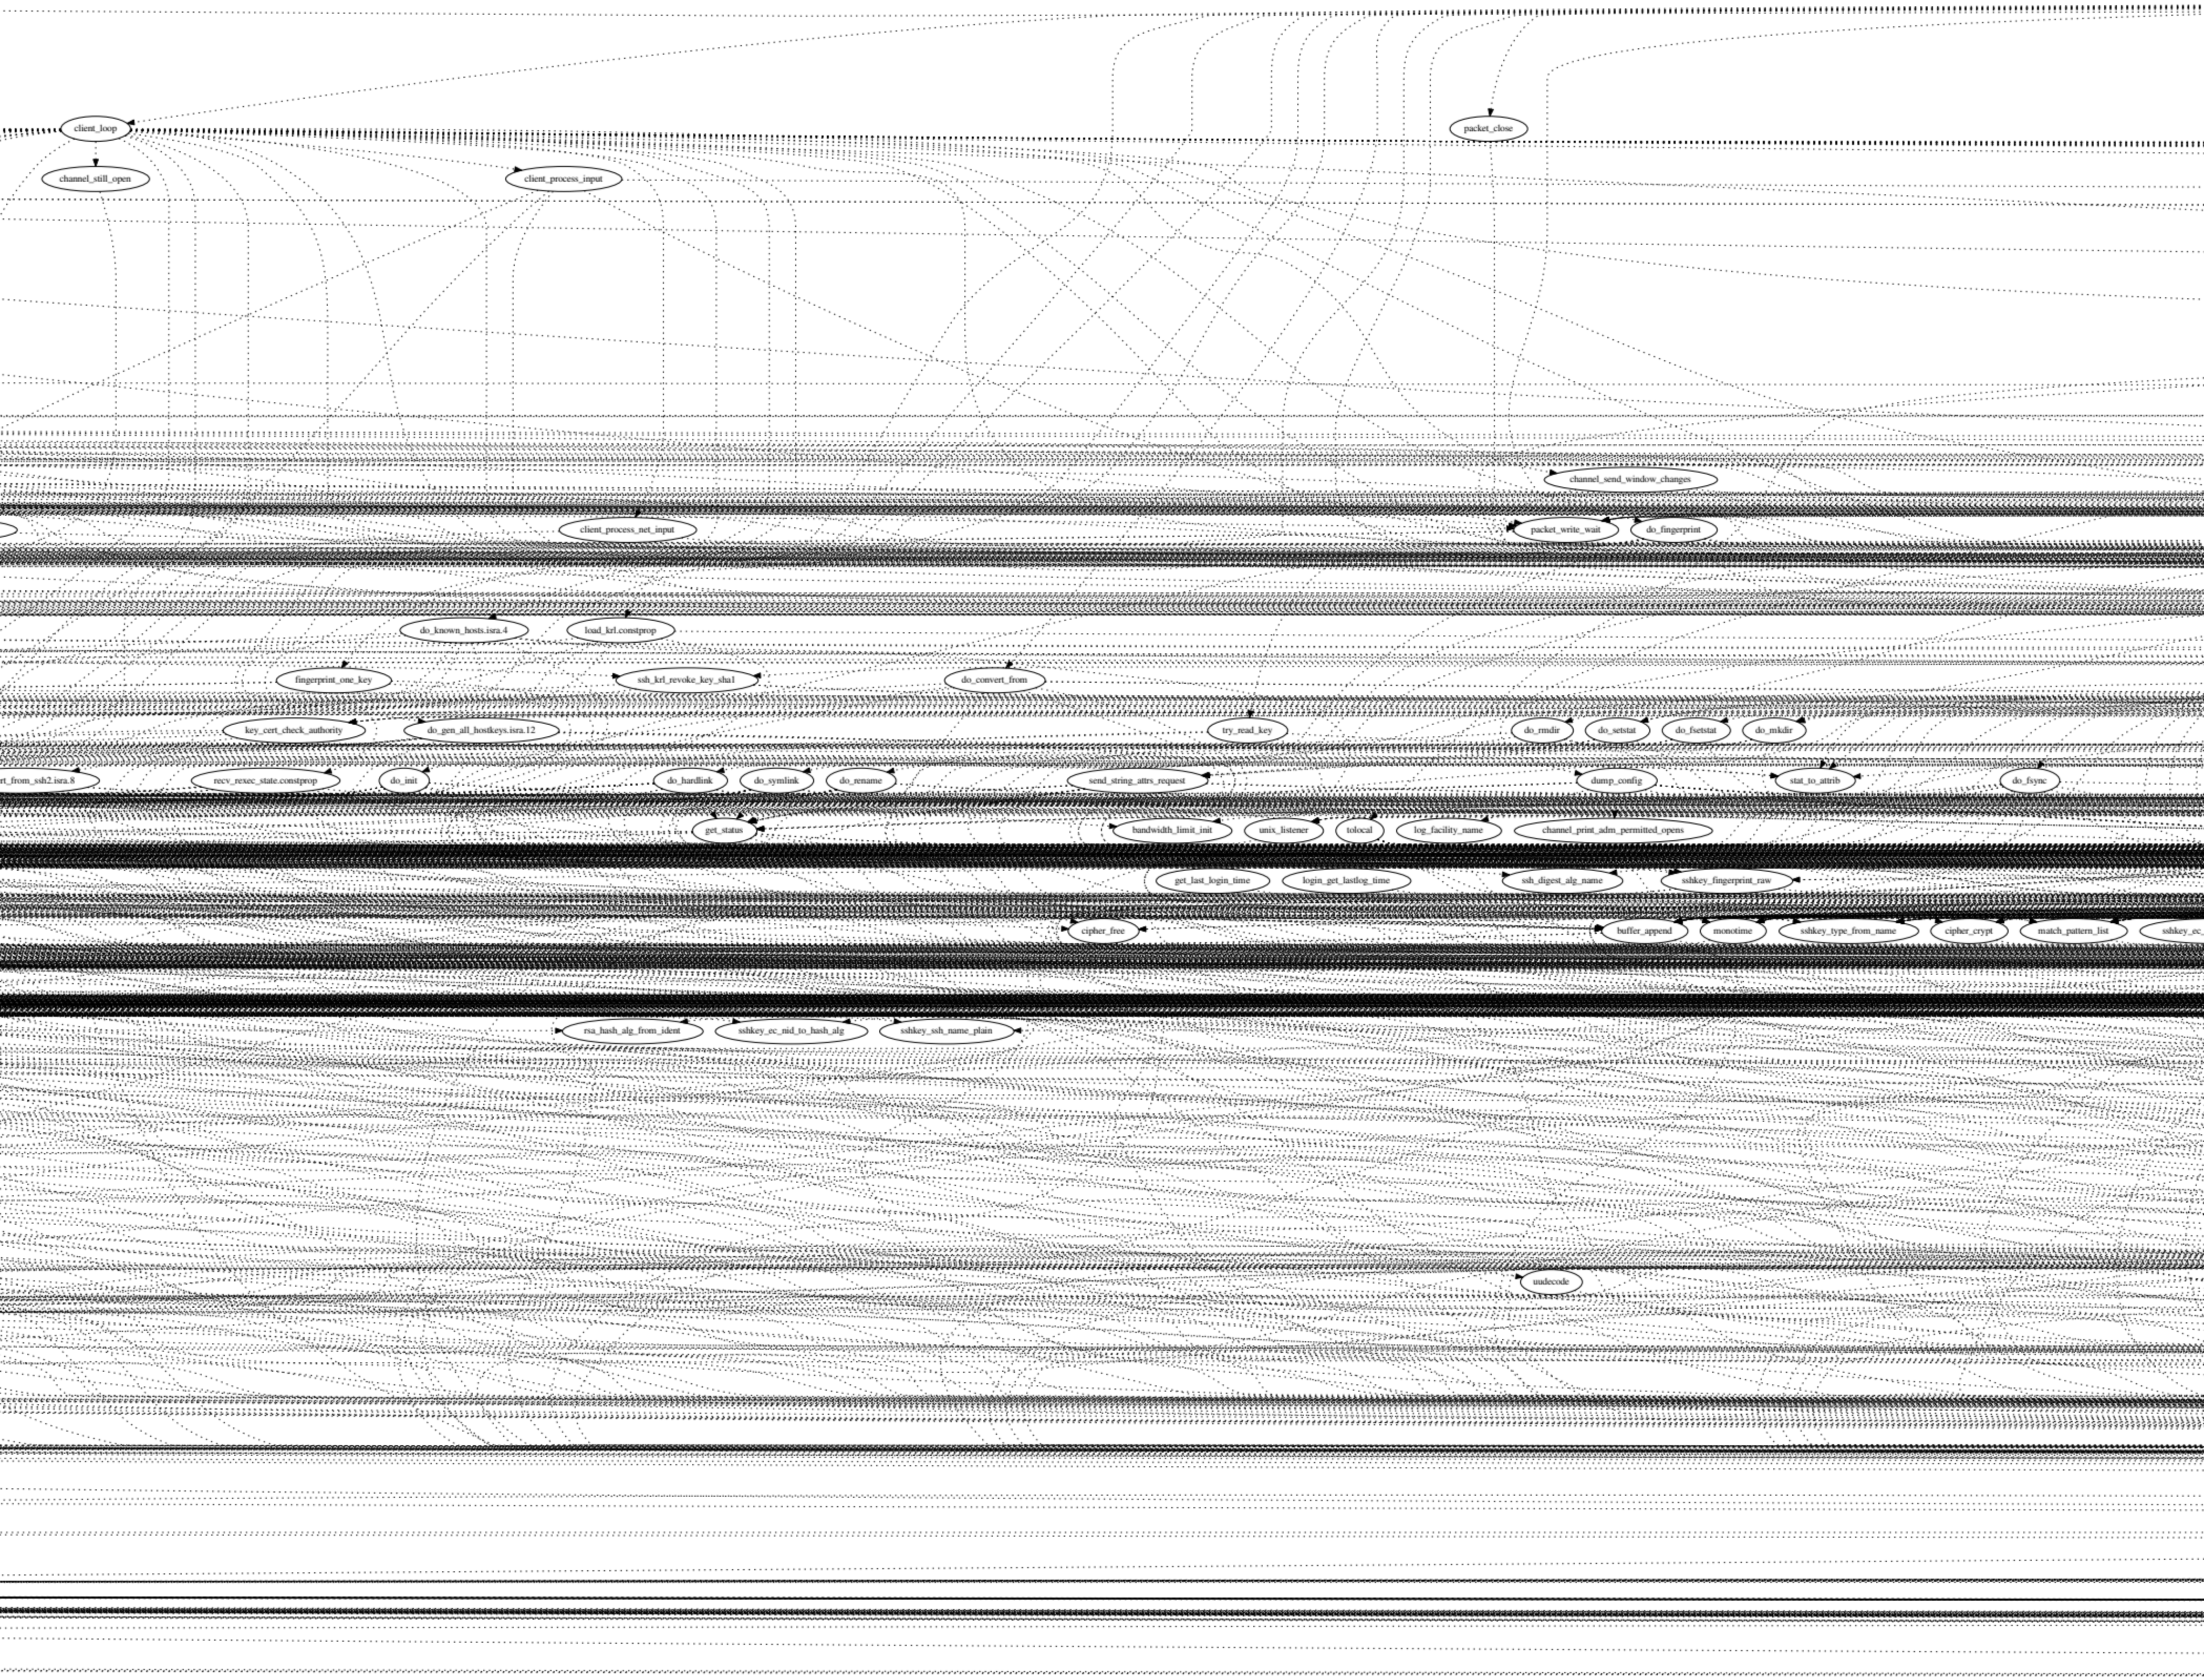
client_loop
packet_close
channel_still_open
client_process_input
channel_send_window_changes
client_process_net_input
packet_write_wait
do_fingerprint
do_known_hosts.isra.4
load_krl.constprop
fingerprint_one_key
ssh_krl_revoke_key_sha1
do_convert_from
key_cert_check_authority
do_gen_all_hostkeys.isra.12
try_read_key
do_rmdir
do_setstat
do_fsetstat
do_mkdir
rt_from_ssh2.isra.8
recv_rexec_state.constprop
do_init
do_hardlink
do_symlink
do_rename
send_string_attrs_request
dump_config
stat_to_attrib
do_fsync
get_status
bandwidth_limit_init
unix_listener
tolocal
log_facility_name
channel_print_adm_permitted_opens
get_last_login_time
login_get_lastlog_time
ssh_digest_alg_name
sshkey_fingerprint_raw
cipher_free
buffer_append
monotime
sshkey_type_from_name
cipher_crypt
match_pattern_list
sshkey_ec_
rsa_hash_alg_from_ident
sshkey_ec_nid_to_hash_alg
sshkey_ssh_name_plain
uudecode

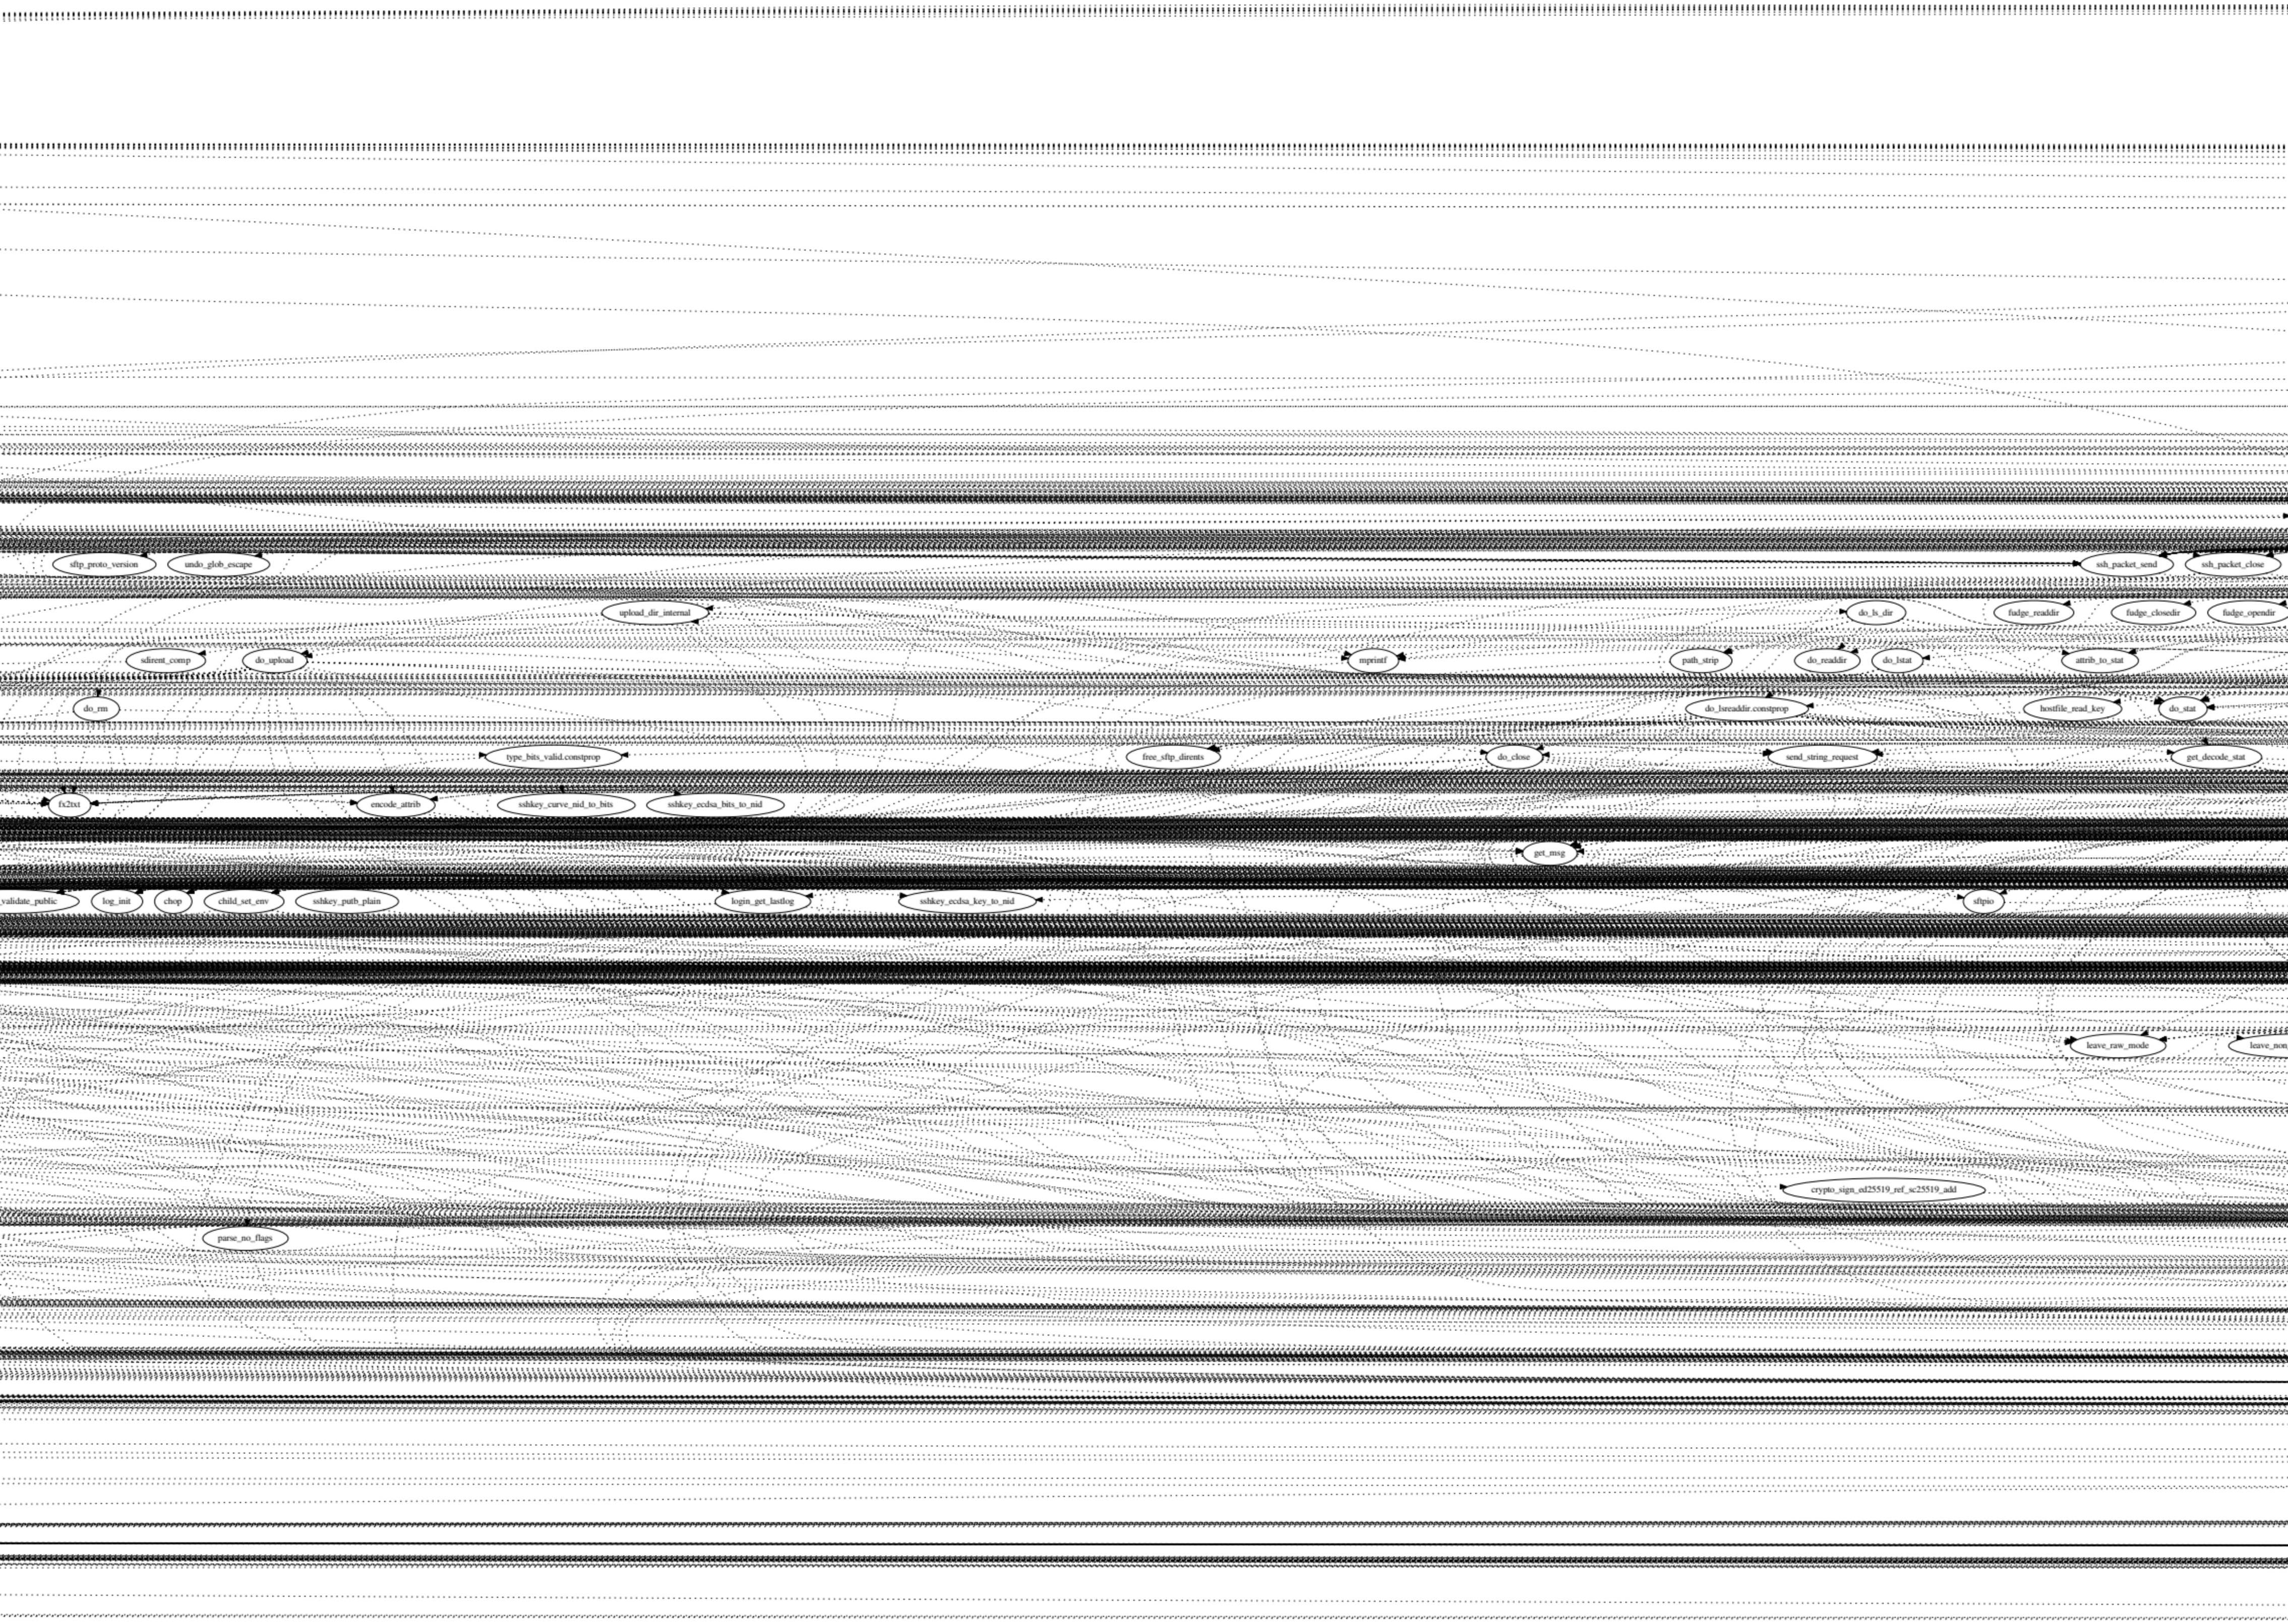
sftp_proto_version
undo_glob_escape
ssh_packet_send
ssh_packet_close
upload_dir_internal
do_ls_dir
fudge_readdir
fudge_closedir
fudge_opendir
sdirent_comp
do_upload
mprintf
path_strip
do_readdir
do_lstat
attrib_to_stat
do_rm
do_lsreaddir.constprop
hostfile_read_key
do_stat
type_bits_valid.constprop
free_sftp_dirents
do_close
send_string_request
get_decode_stat
fx2txt
encode_attrib
sshkey_curve_nid_to_bits
sshkey_ecdsa_bits_to_nid
get_msg
validate_public
log_init
chop
child_set_env
sshkey_putb_plain
login_get_lastlog
sshkey_ecdsa_key_to_nid
sftpio
leave_raw_mode
leave_non
crypto_sign_ed25519_ref_sc25519_add
parse_no_flags

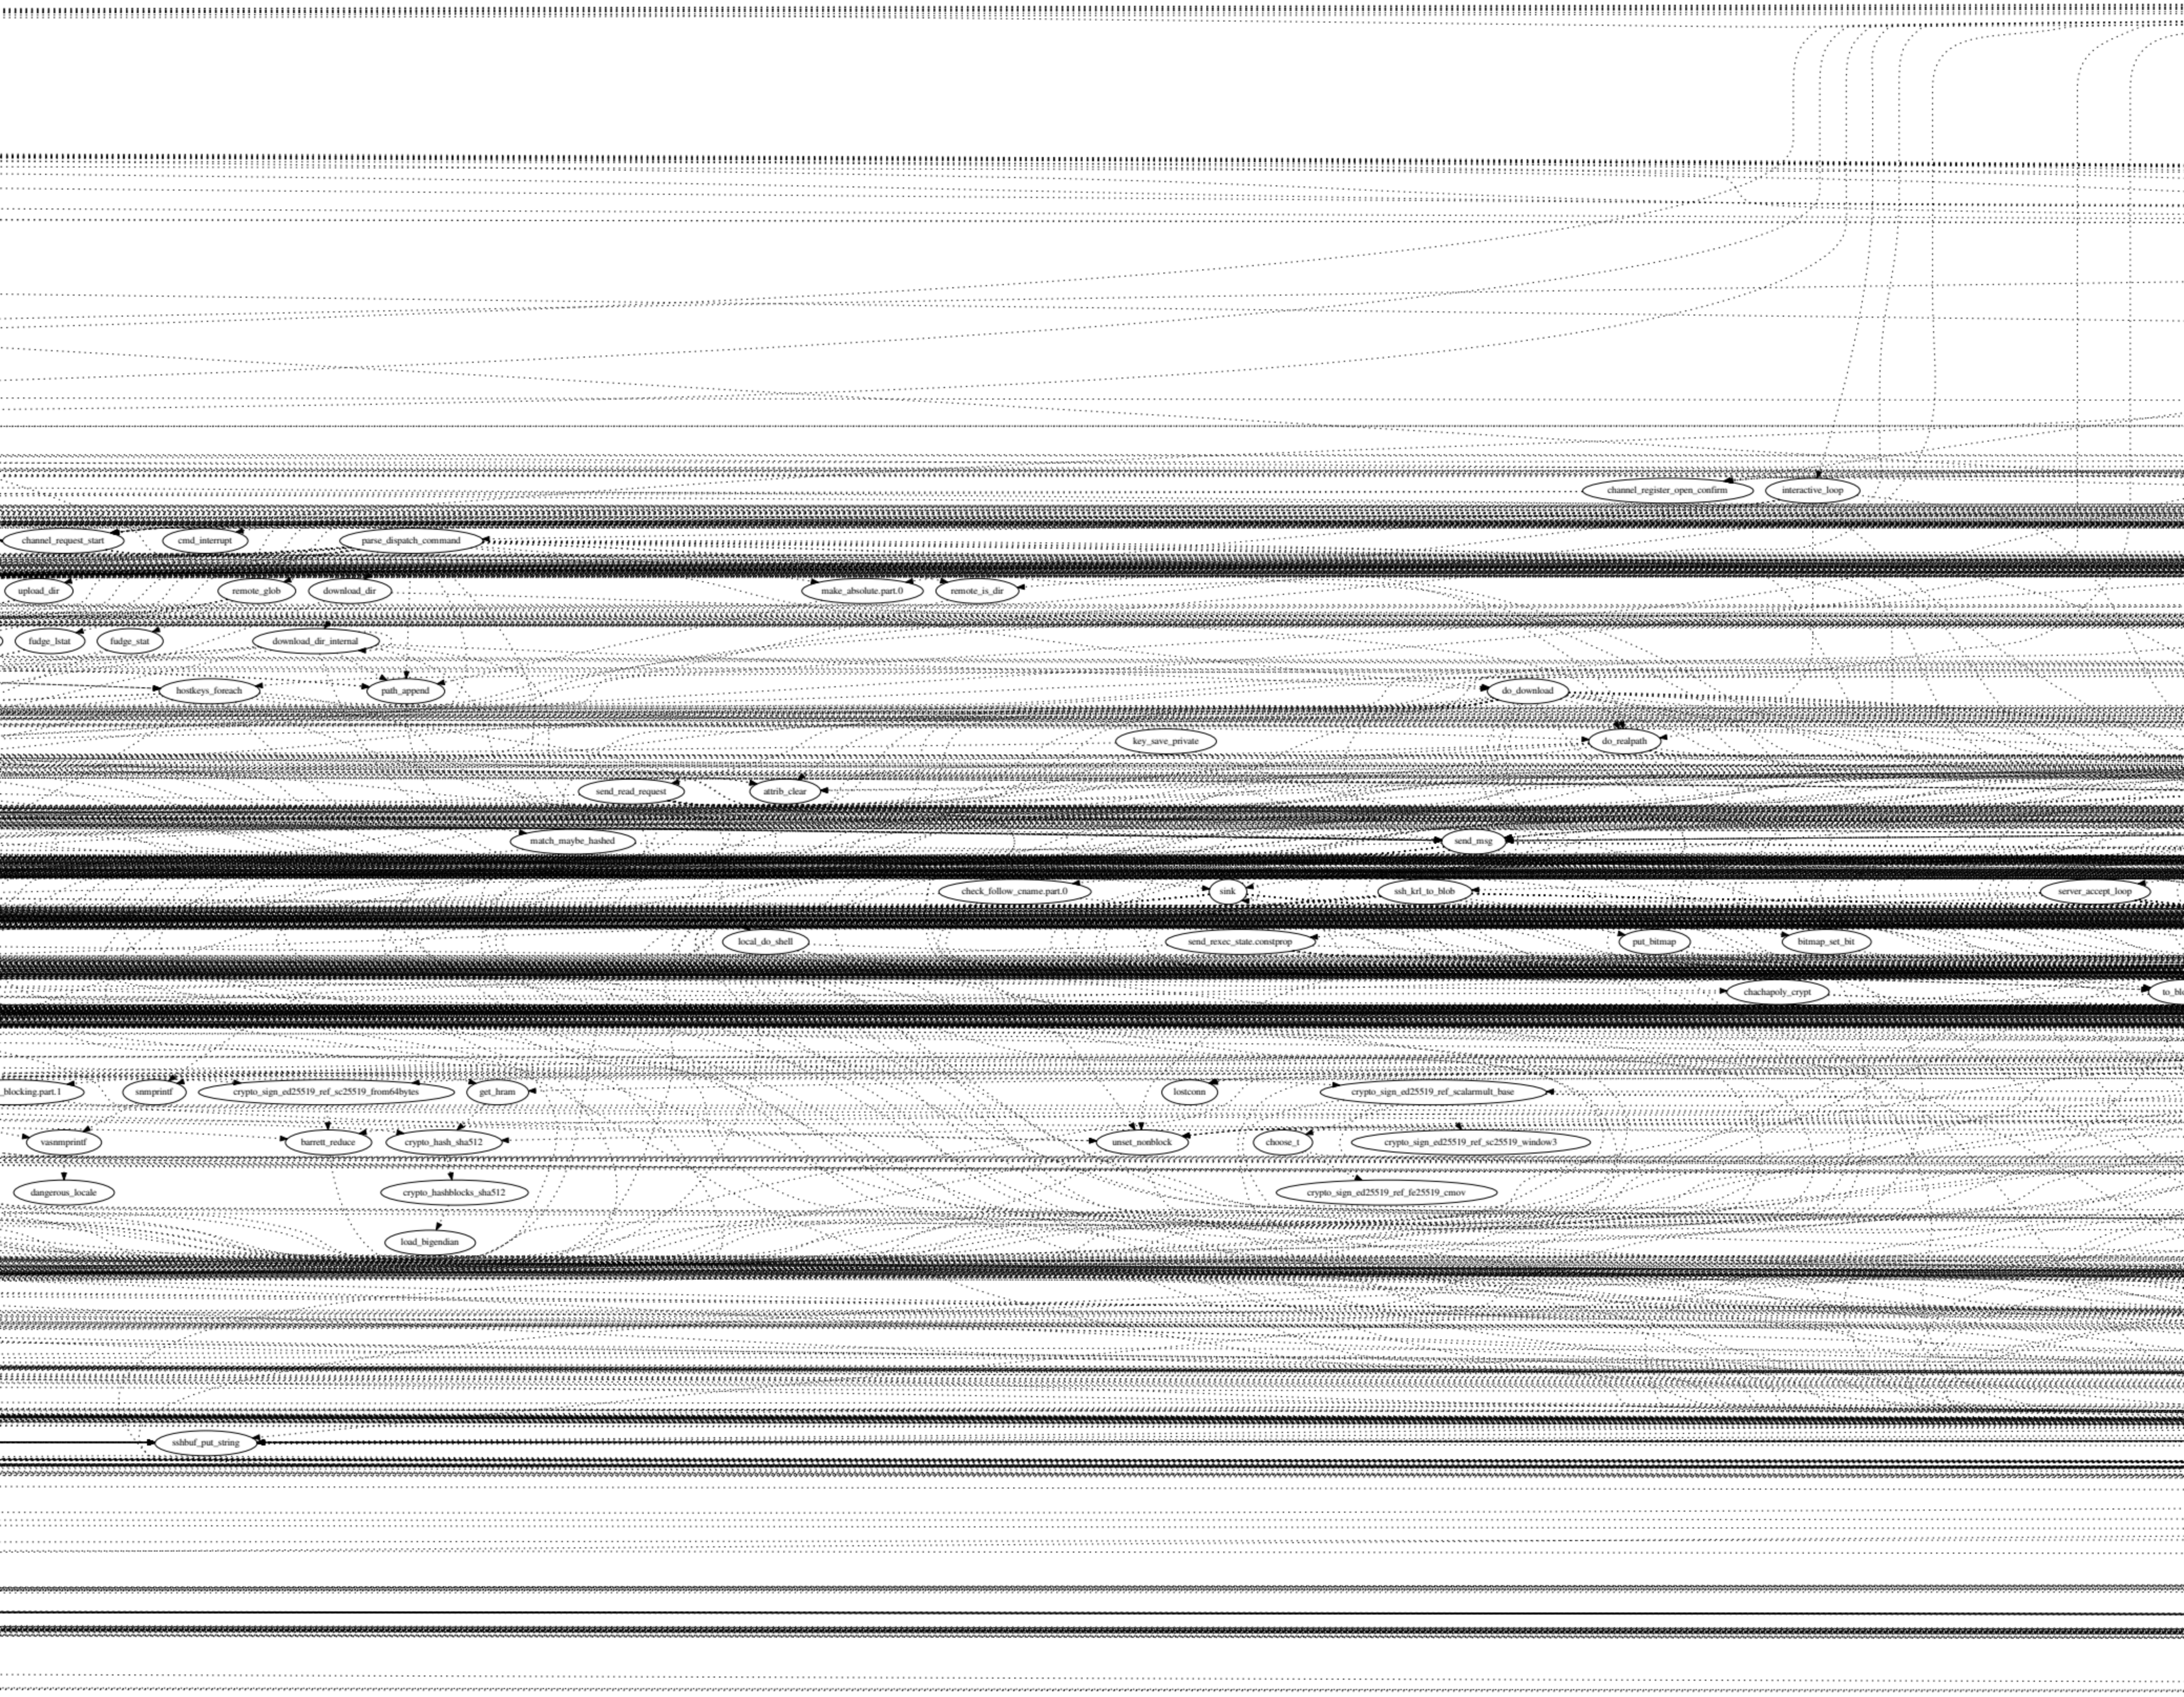
channel_register_open_confirm
interactive_loop
channel_request_start
cmd_interrupt
parse_dispatch_command
upload_dir
remote_glob
download_dir
make_absolute.part.0
remote_is_dir
fudge_lstat
fudge_stat
download_dir_internal
hostkeys_foreach
path_append
do_download
key_save_private
do_realpath
send_read_request
attrib_clear
match_maybe_hashed
send_msg
check_follow_cname.part.0
sink
ssh_krl_to_blob
server_accept_loop
local_do_shell
send_rexec_state.constprop
put_bitmap
bitmap_set_bit
chachapoly_crypt
to_bl
_blocking.part.1
snmprintf
crypto_sign_ed25519_ref_sc25519_from64bytes
get_hram
lostconn
crypto_sign_ed25519_ref_scalarmult_base
vasnmprintf
barrett_reduce
crypto_hash_sha512
unset_nonblock
choose_t
crypto_sign_ed25519_ref_sc25519_window3
dangerous_locale
crypto_hashblocks_sha512
crypto_sign_ed25519_ref_fe25519_cmov
load_bigendian
sshbuf_put_string

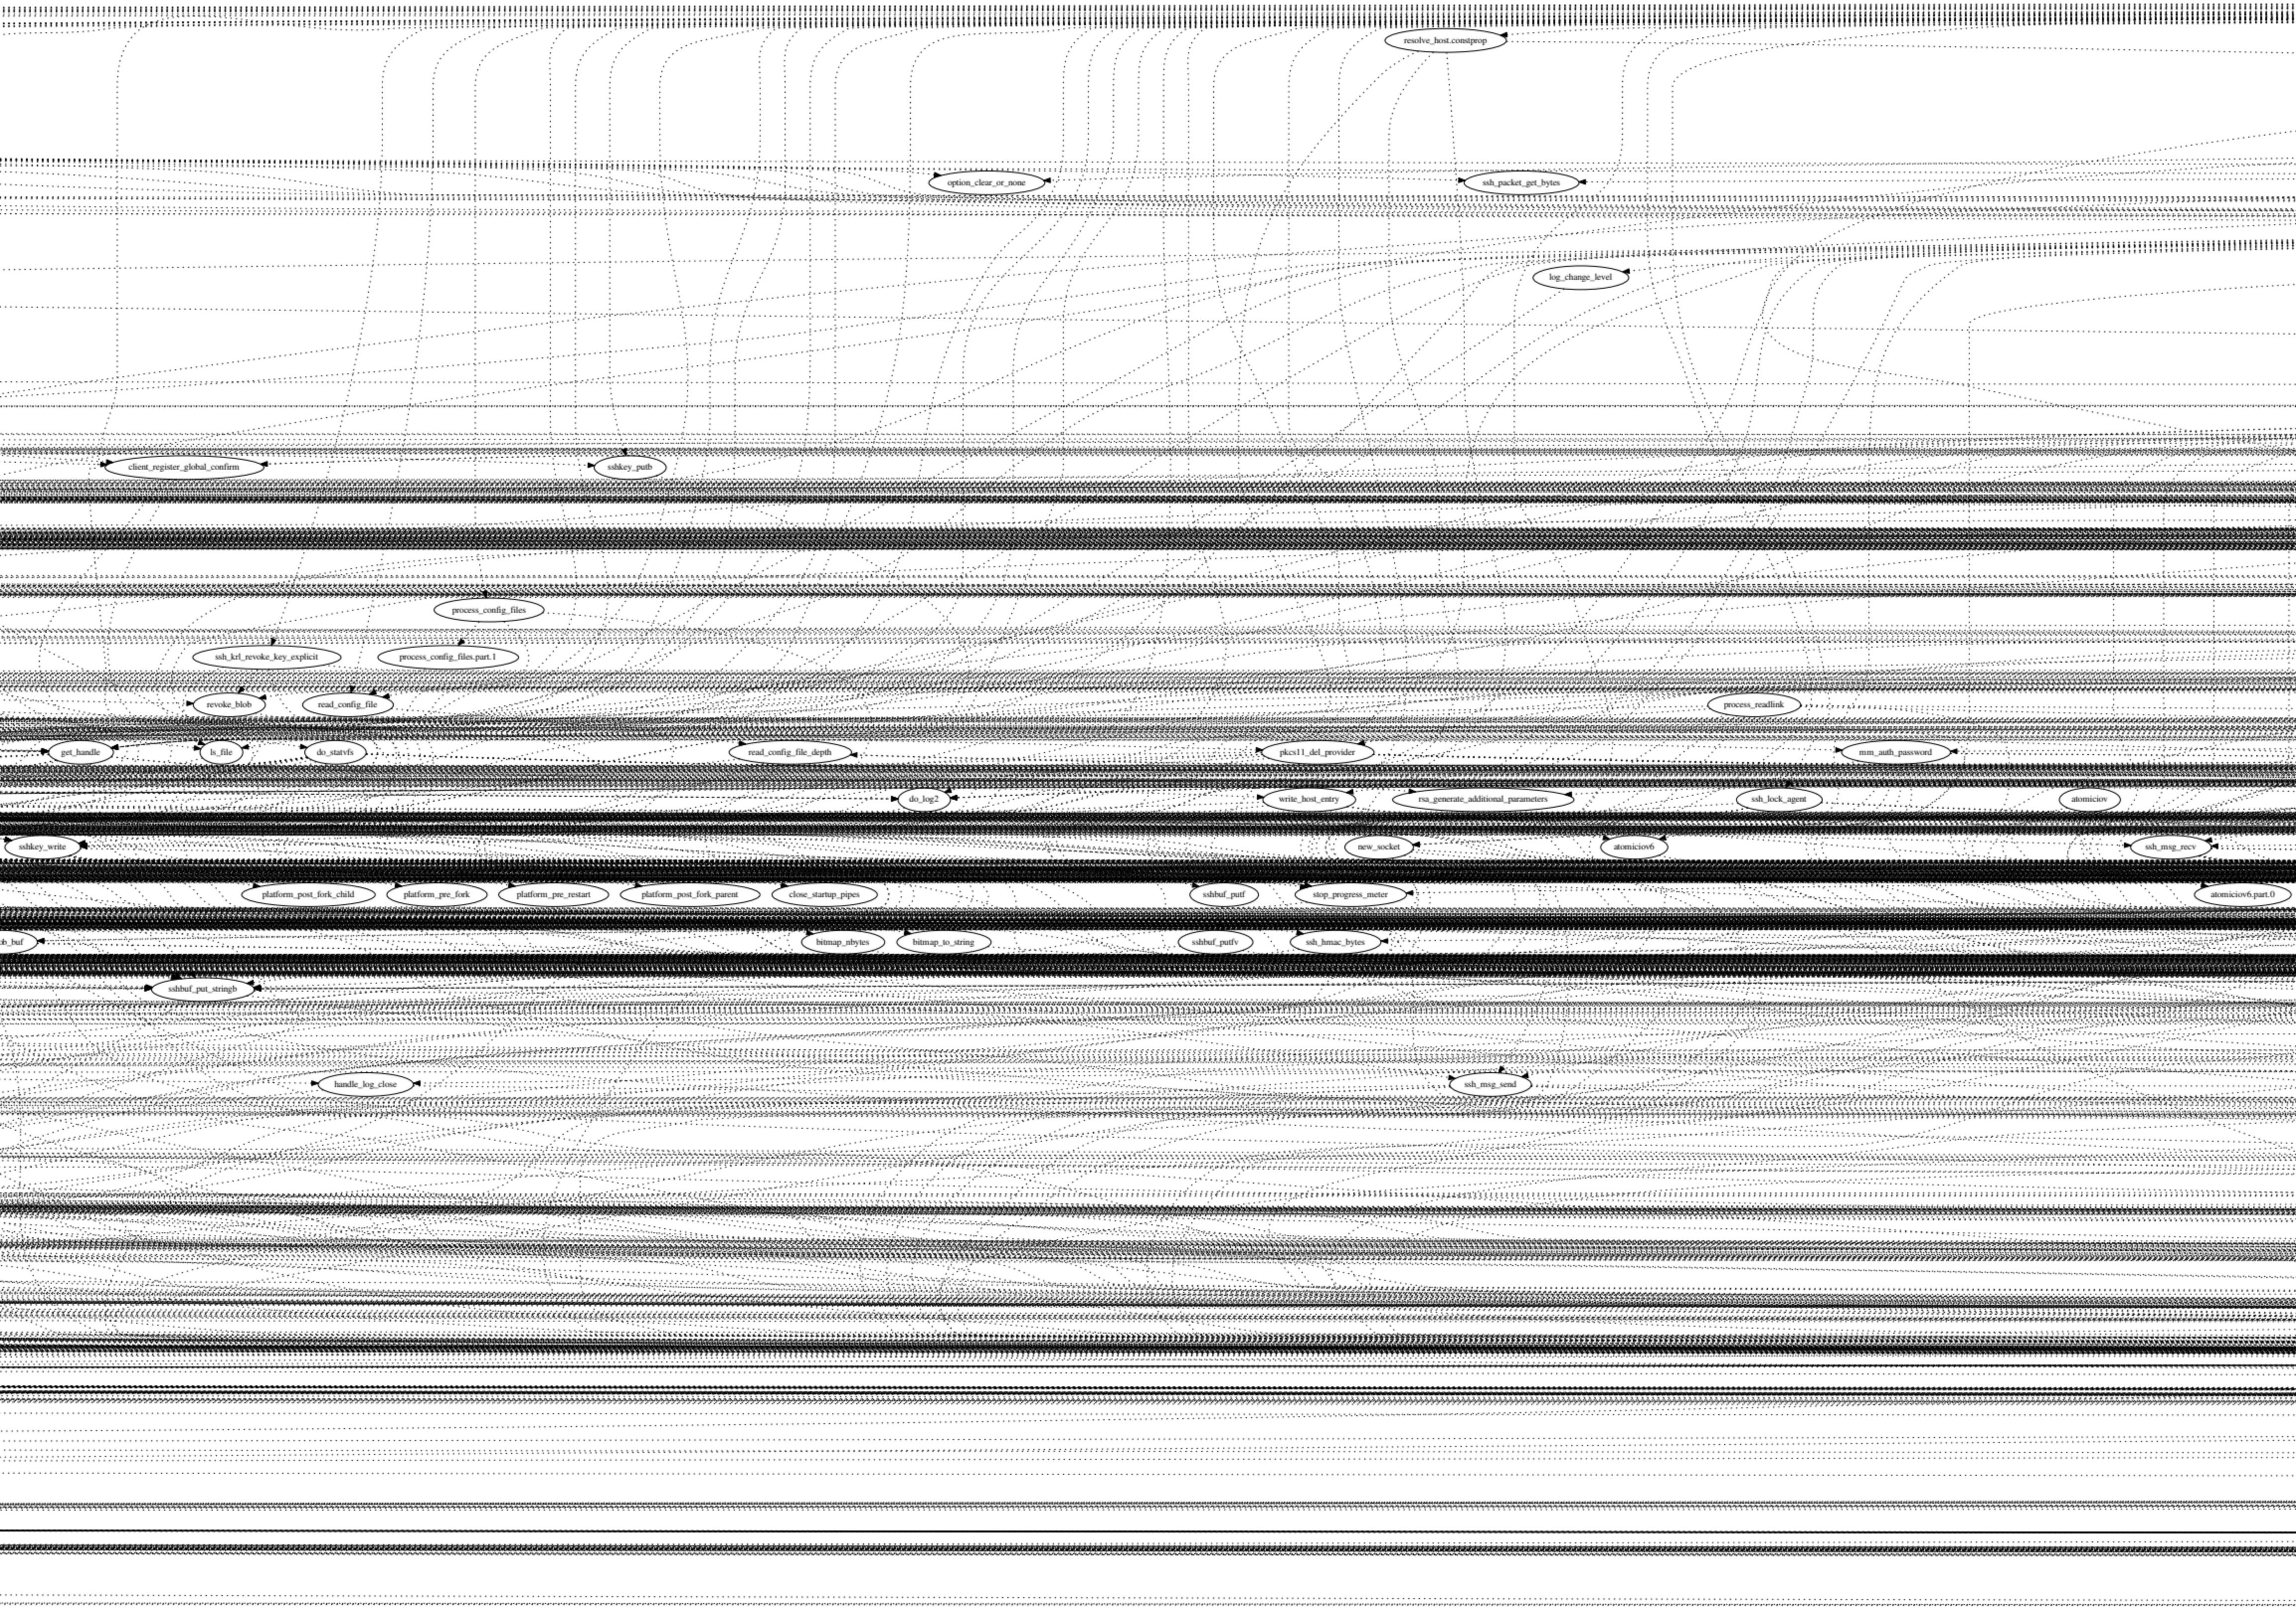
resolve_host.constprop
option_clear_or_none
ssh_packet_get_bytes
log_change_level
client_register_global_confirm
sshkey_putb
process_config_files
ssh_krl_revoke_key_explicit
process_config_files.part.1
revoke_blob
read_config_file
process_readlink
get_handle
ls_file
do_statvfs
read_config_file_depth
pkcs11_del_provider
mm_auth_password
do_log2
write_host_entry
rsa_generate_additional_parameters
ssh_lock_agent
atomiciov
sshkey_write
new_socket
atomiciov6
ssh_msg_recv
platform_post_fork_child
platform_pre_fork
platform_pre_restart
platform_post_fork_parent
close_startup_pipes
sshbuf_putf
stop_progress_meter
atomiciov6.part.0
b_buf
bitmap_nbytes
bitmap_to_string
sshbuf_putfv
ssh_hmac_bytes
sshbuf_put_stringb
handle_log_close
ssh_msg_send

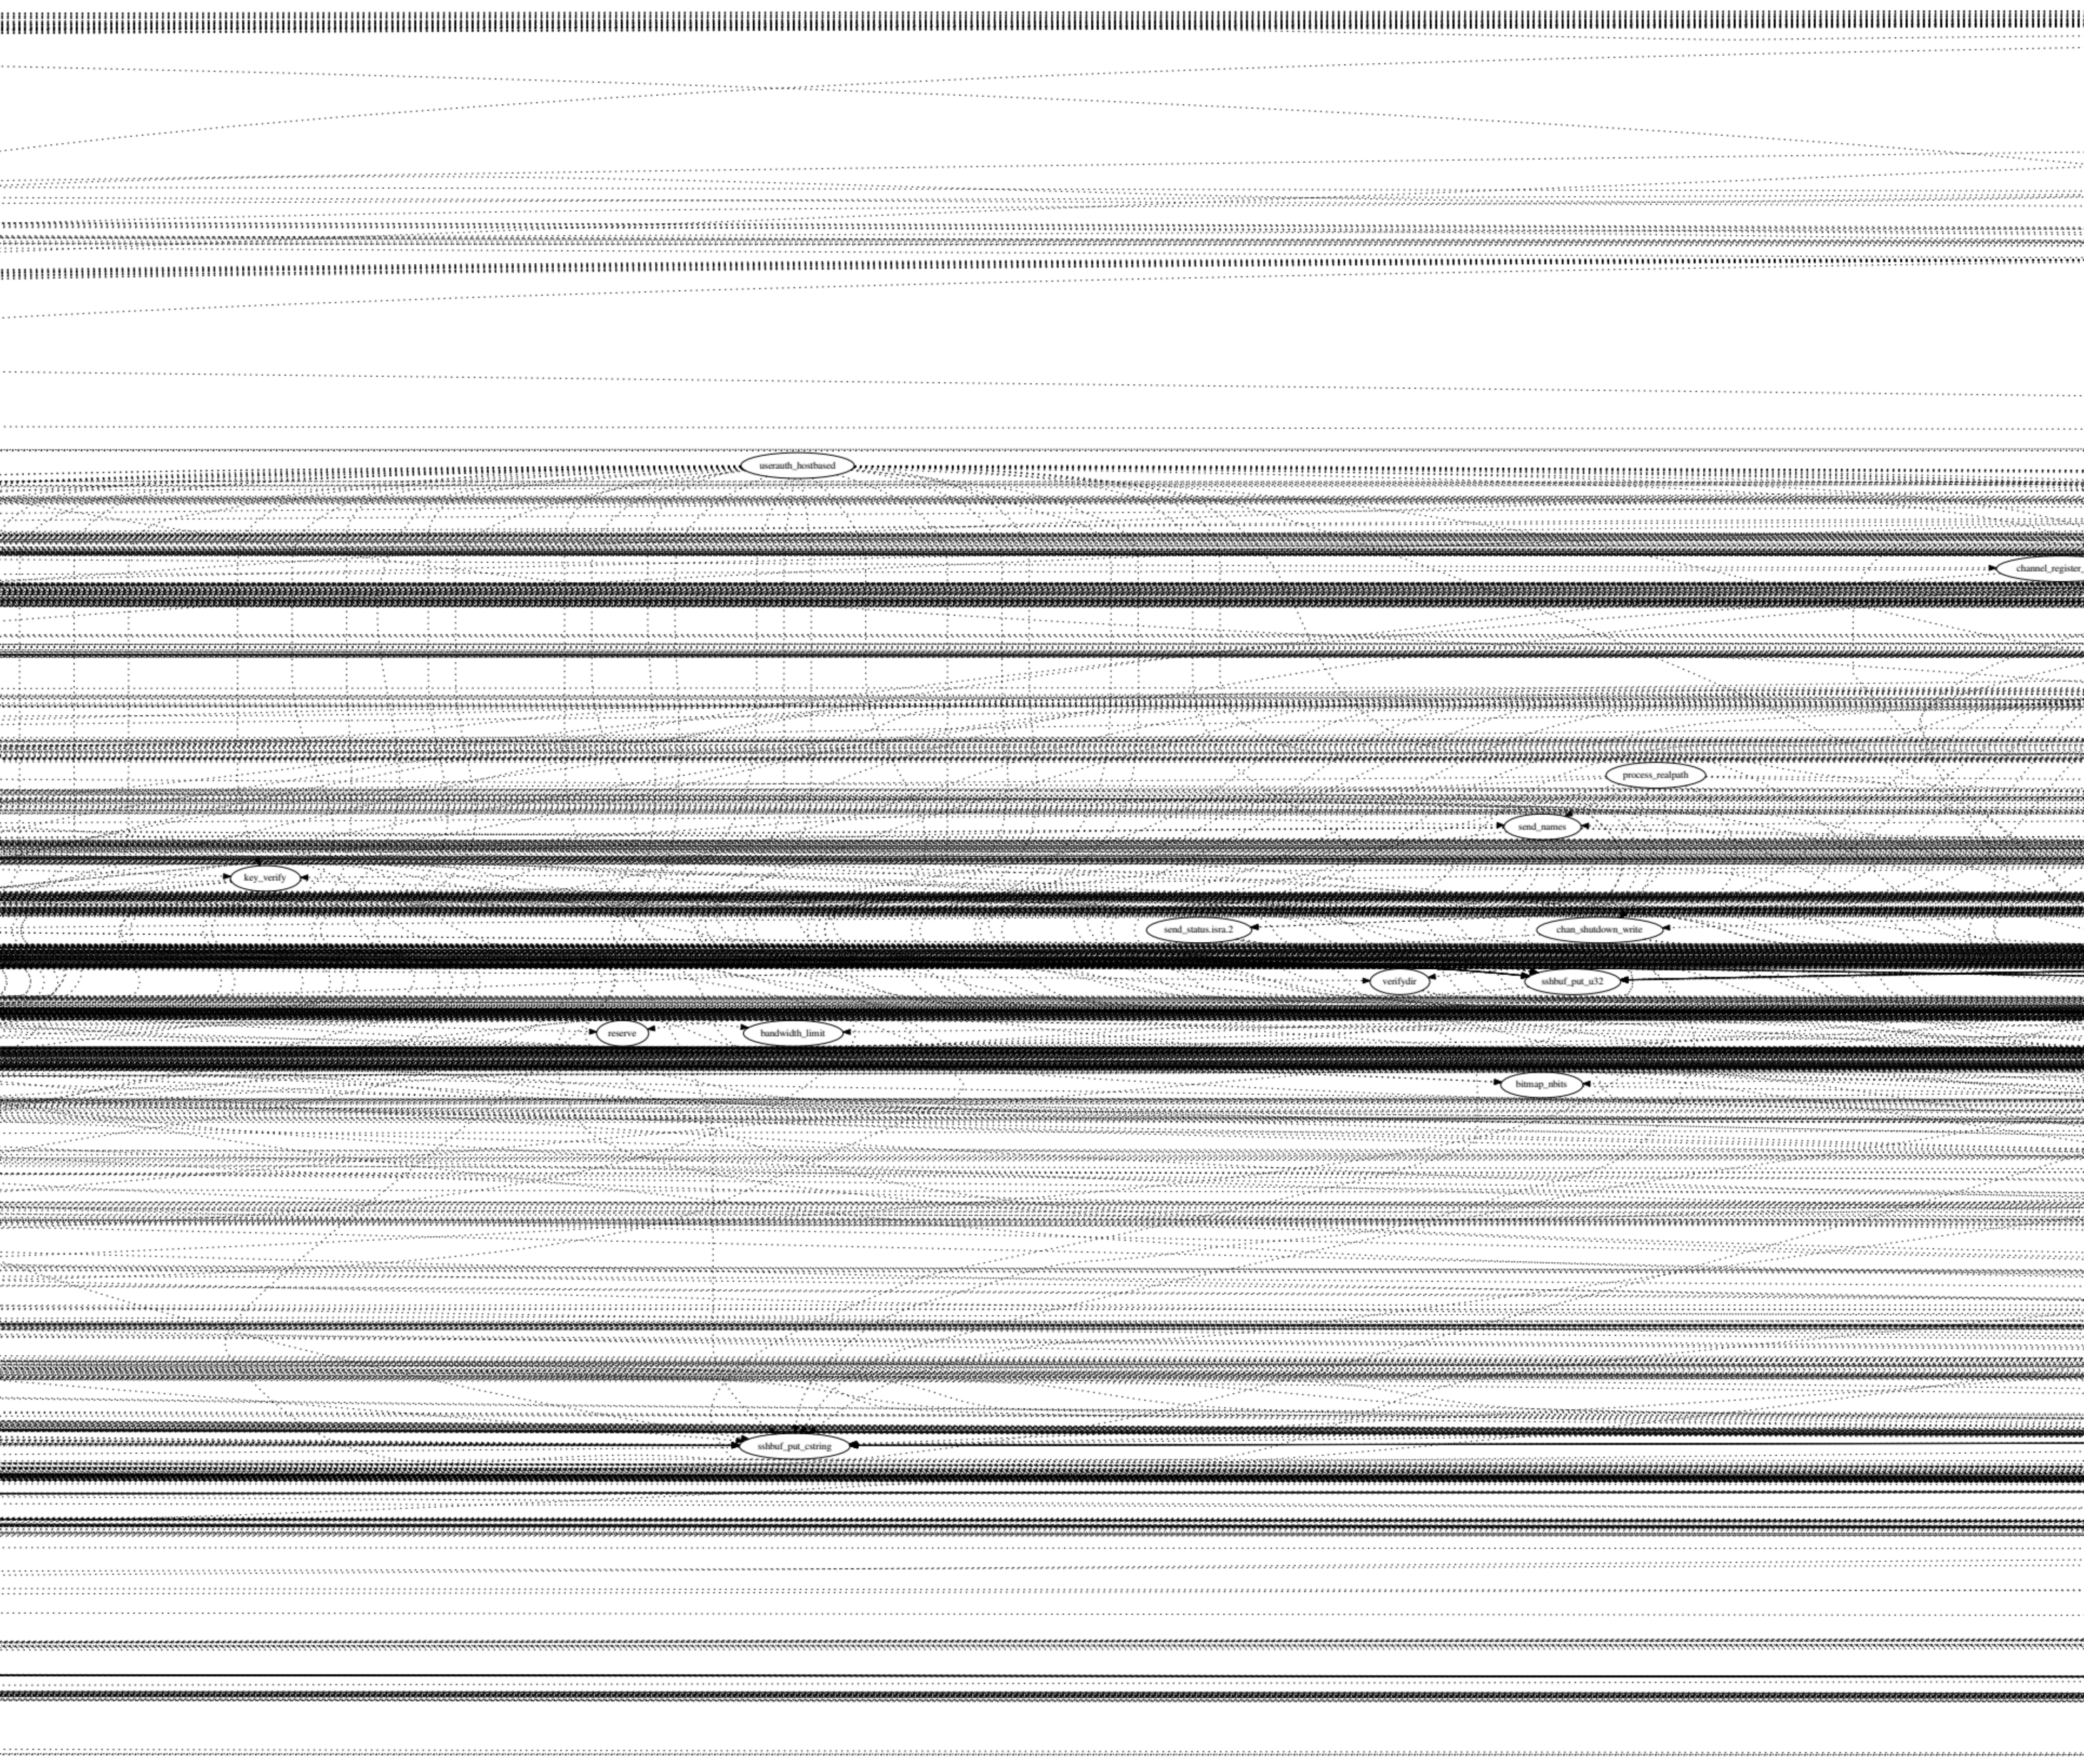
userauth_hostbased
channel_register_
process_realpath
send_names
key_verify
send_status.isra.2
chan_shutdown_write
verifydir
sshbuf_put_u32
reserve
bandwidth_limit
bitmap_nbits
sshbuf_put_cstring

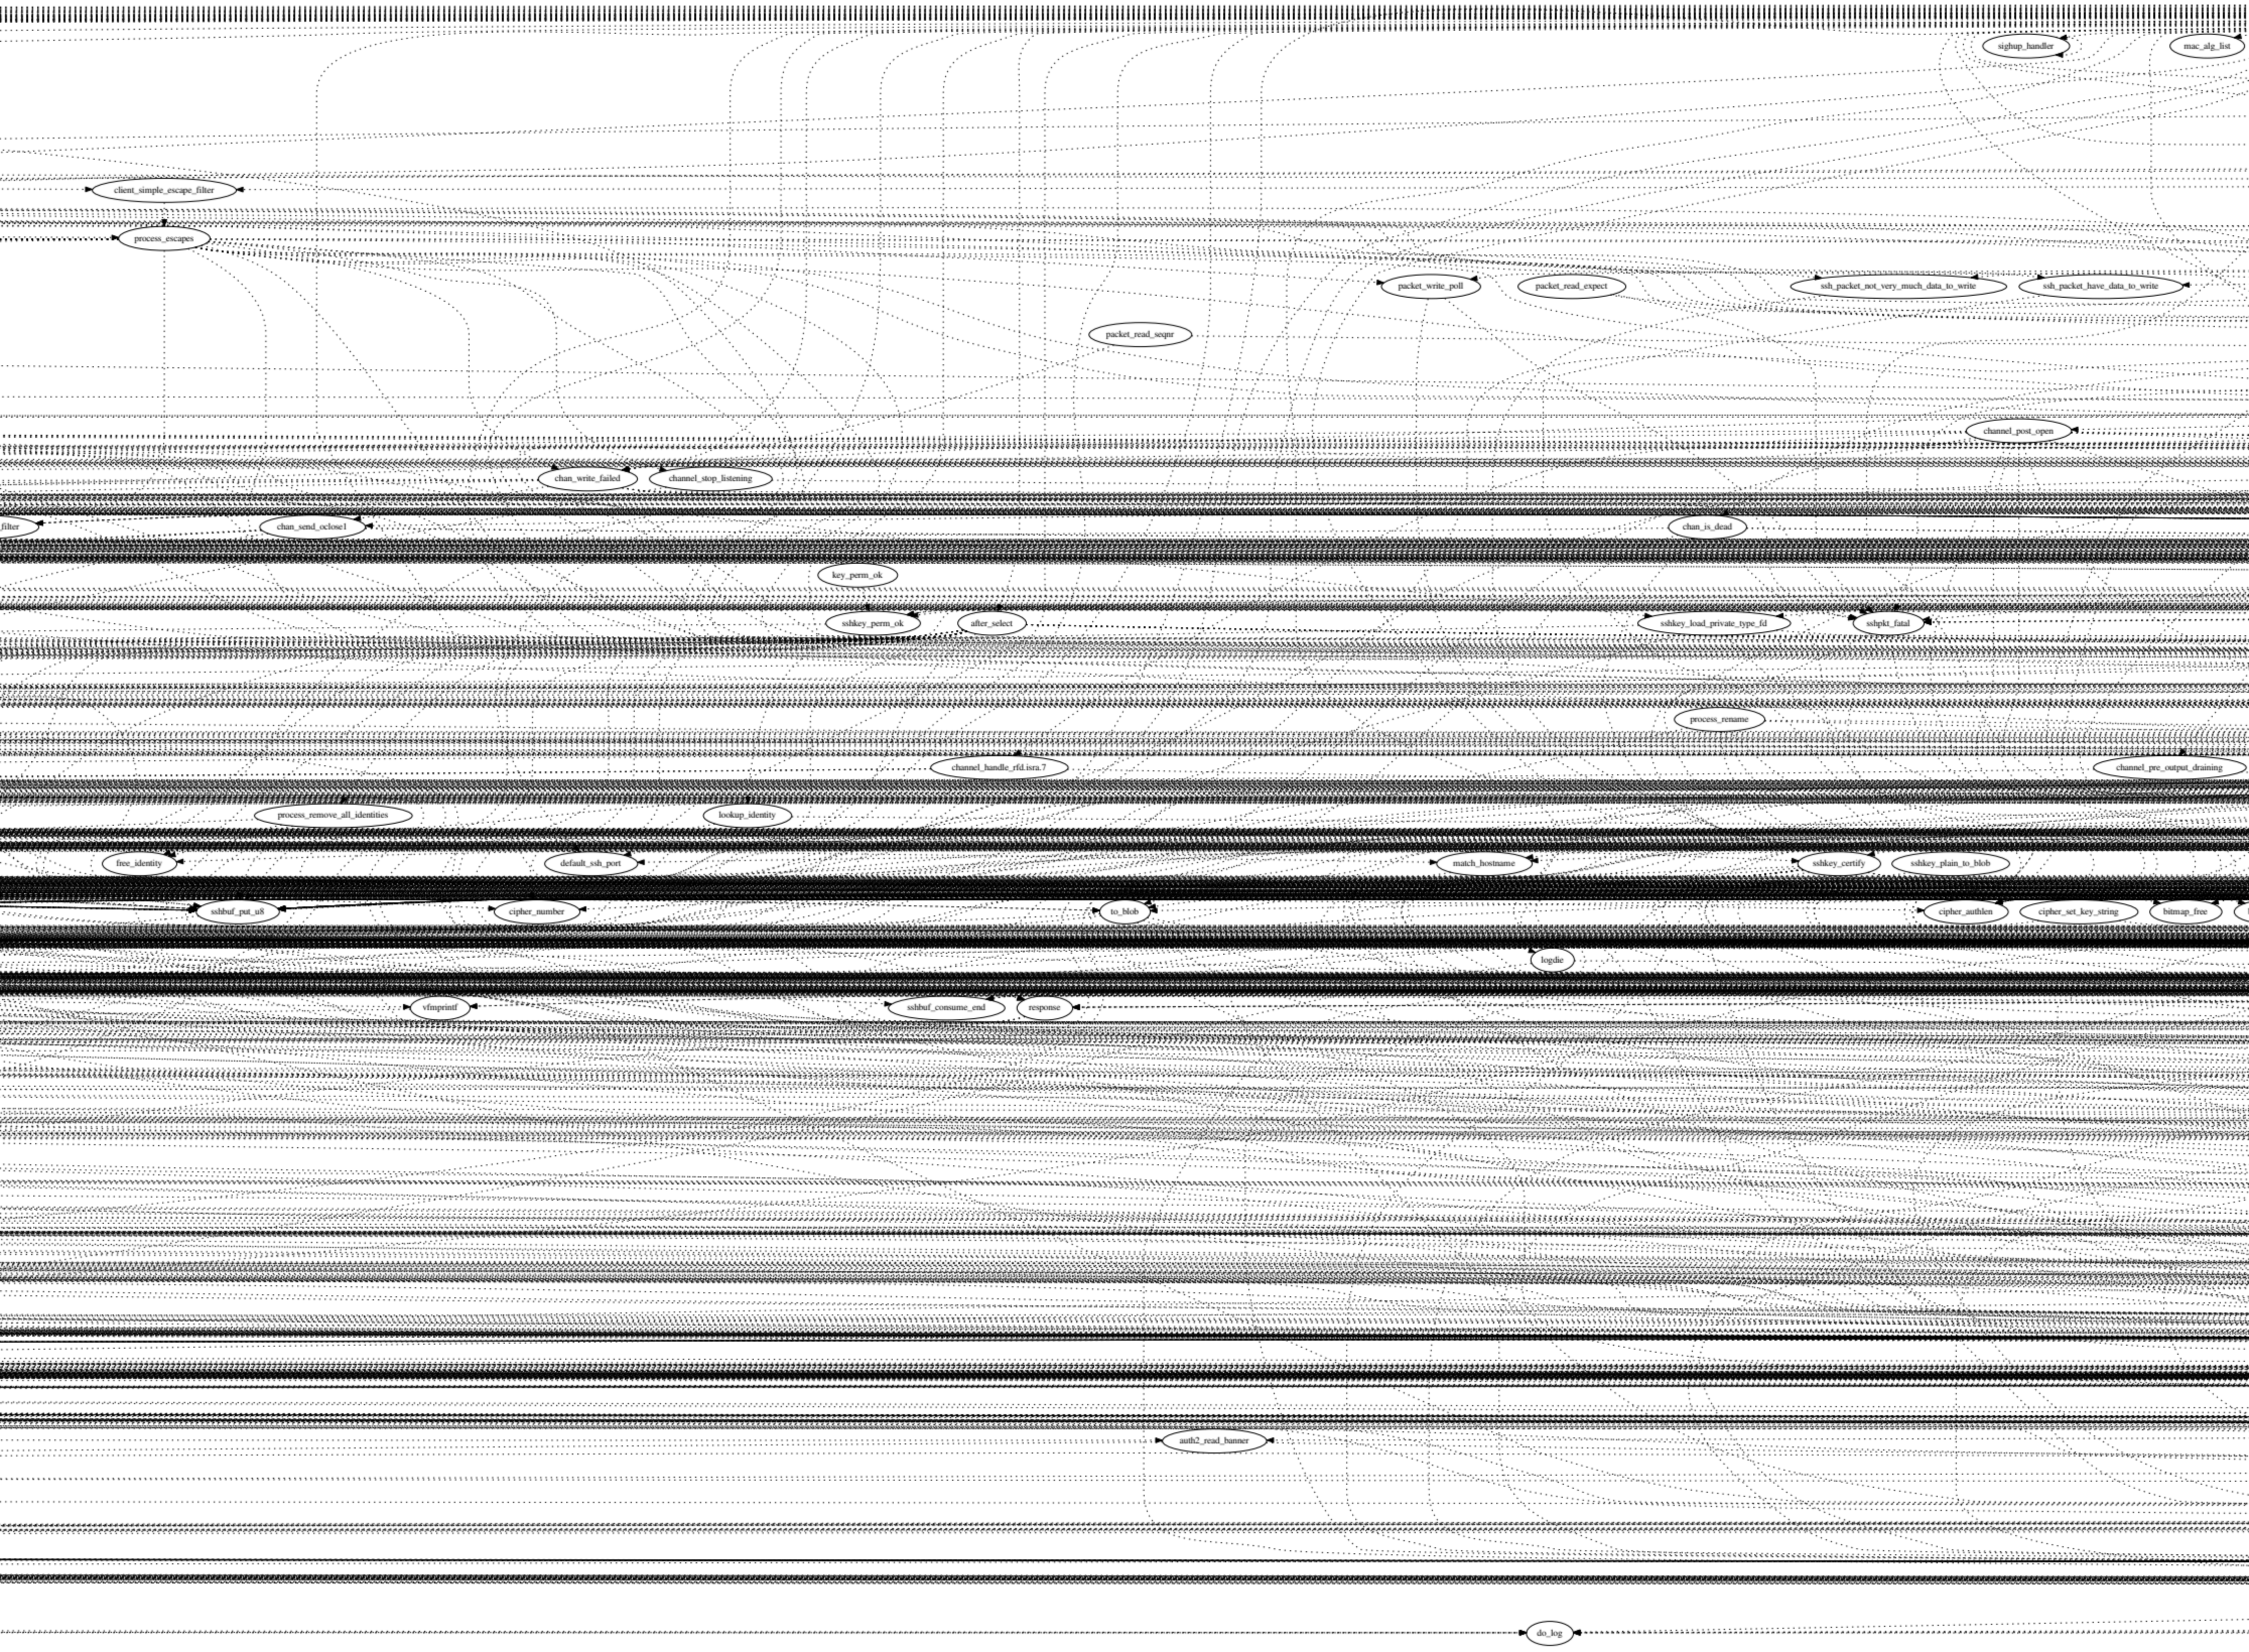
sighup_handler
mac_alg_list
client_simple_escape_filter
process_escapes
packet_write_poll
packet_read_expect
ssh_packet_not_very_much_data_to_write
ssh_packet_have_data_to_write
packet_read_seqnr
channel_post_open
chan_write_failed
channel_stop_listening
filter
chan_send_oclose1
chan_is_dead
key_perm_ok
sshkey_perm_ok
after_select
sshkey_load_private_type_fd
sshpkt_fatal
process_rename
channel_handle_rfd.isra.7
channel_pre_output_draining
process_remove_all_identities
lookup_identity
free_identity
default_ssh_port
match_hostname
sshkey_certify
sshkey_plain_to_blob
sshbuf_put_u8
cipher_number
to_blob
cipher_authlen
cipher_set_key_string
bitmap_free
logdie
vfmprintf
sshbuf_consume_end
response
auth2_read_banner
do_log

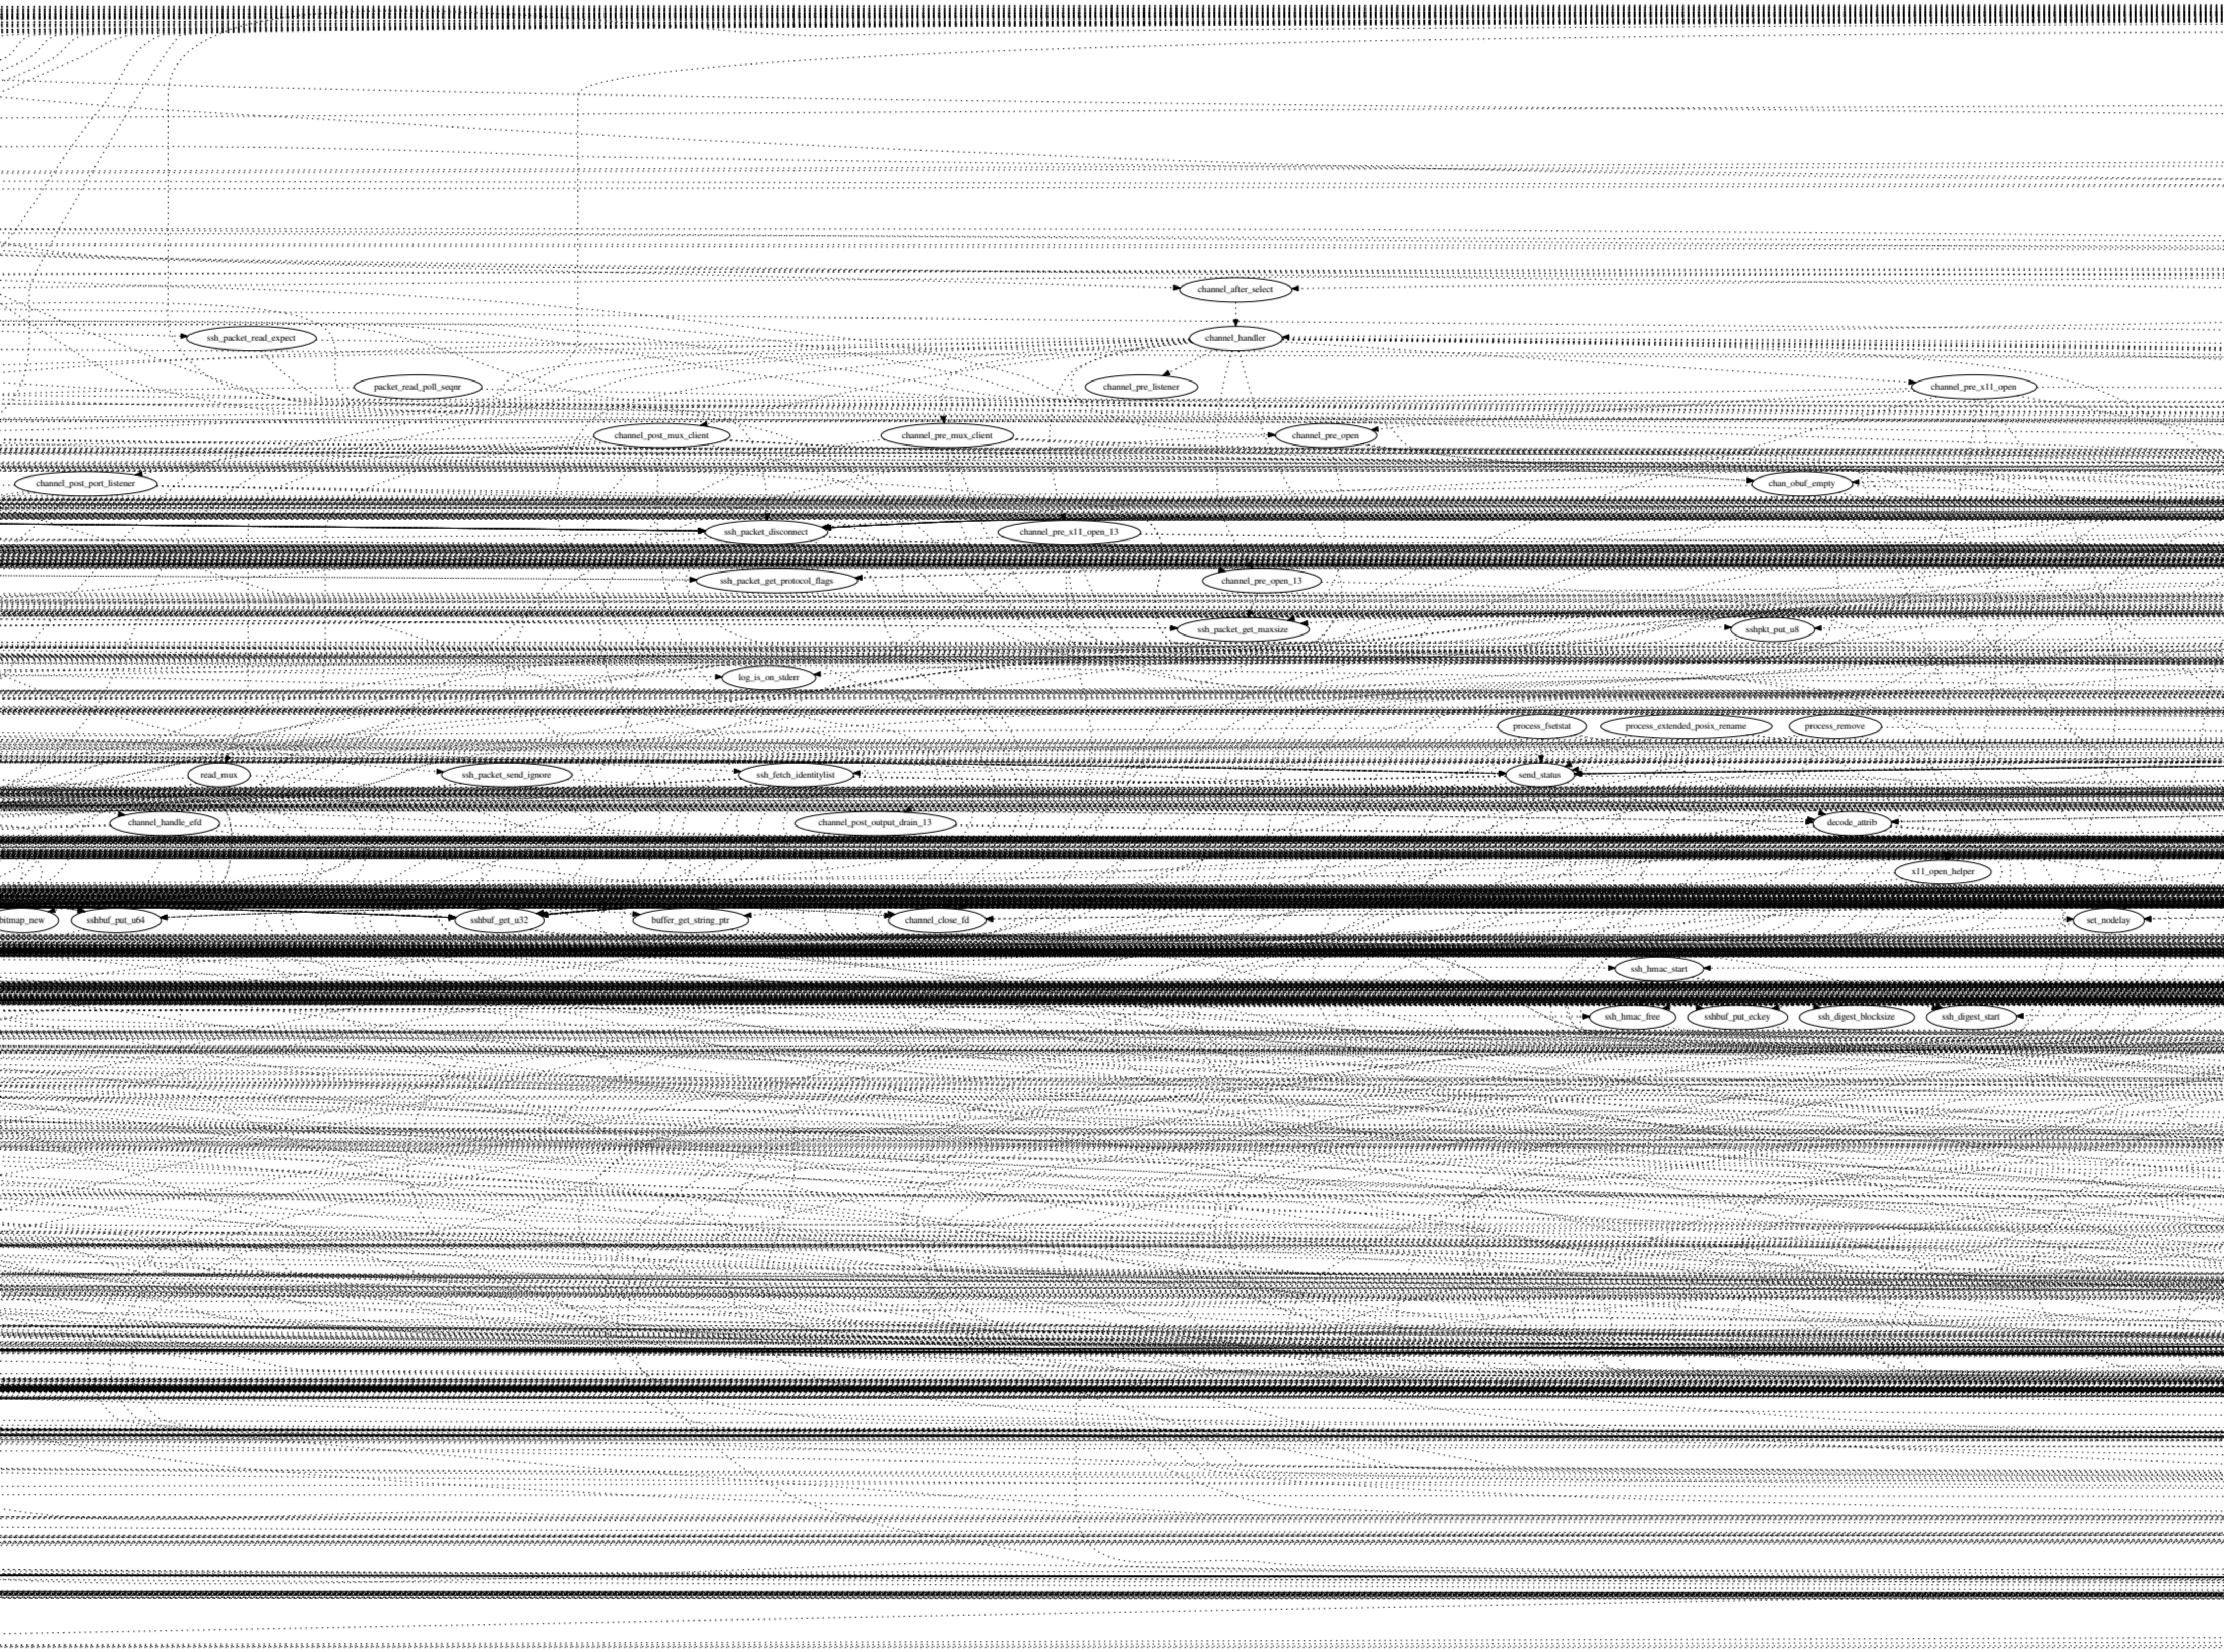
channel_after_select
channel_handler
ssh_packet_read_expect
packet_read_poll_seqnr
channel_pre_listener
channel_pre_x11_open
channel_post_mux_client
channel_pre_mux_client
channel_pre_open
channel_post_port_listener
chan_obuf_empty
ssh_packet_disconnect
channel_pre_x11_open_13
ssh_packet_get_protocol_flags
channel_pre_open_13
ssh_packet_get_maxsize
sshpkt_put_u8
log_is_on_stderr
process_fsetstat
process_extended_posix_rename
process_remove
read_mux
ssh_packet_send_ignore
ssh_fetch_identitylist
send_status
channel_handle_efd
channel_post_output_drain_13
decode_attrib
x11_open_helper
bitmap_new
sshbuf_put_u64
sshbuf_get_u32
buffer_get_string_ptr
channel_close_fd
set_nodelay
ssh_hmac_start
ssh_hmac_free
sshbuf_put_eckey
ssh_digest_blocksize
ssh_digest_start

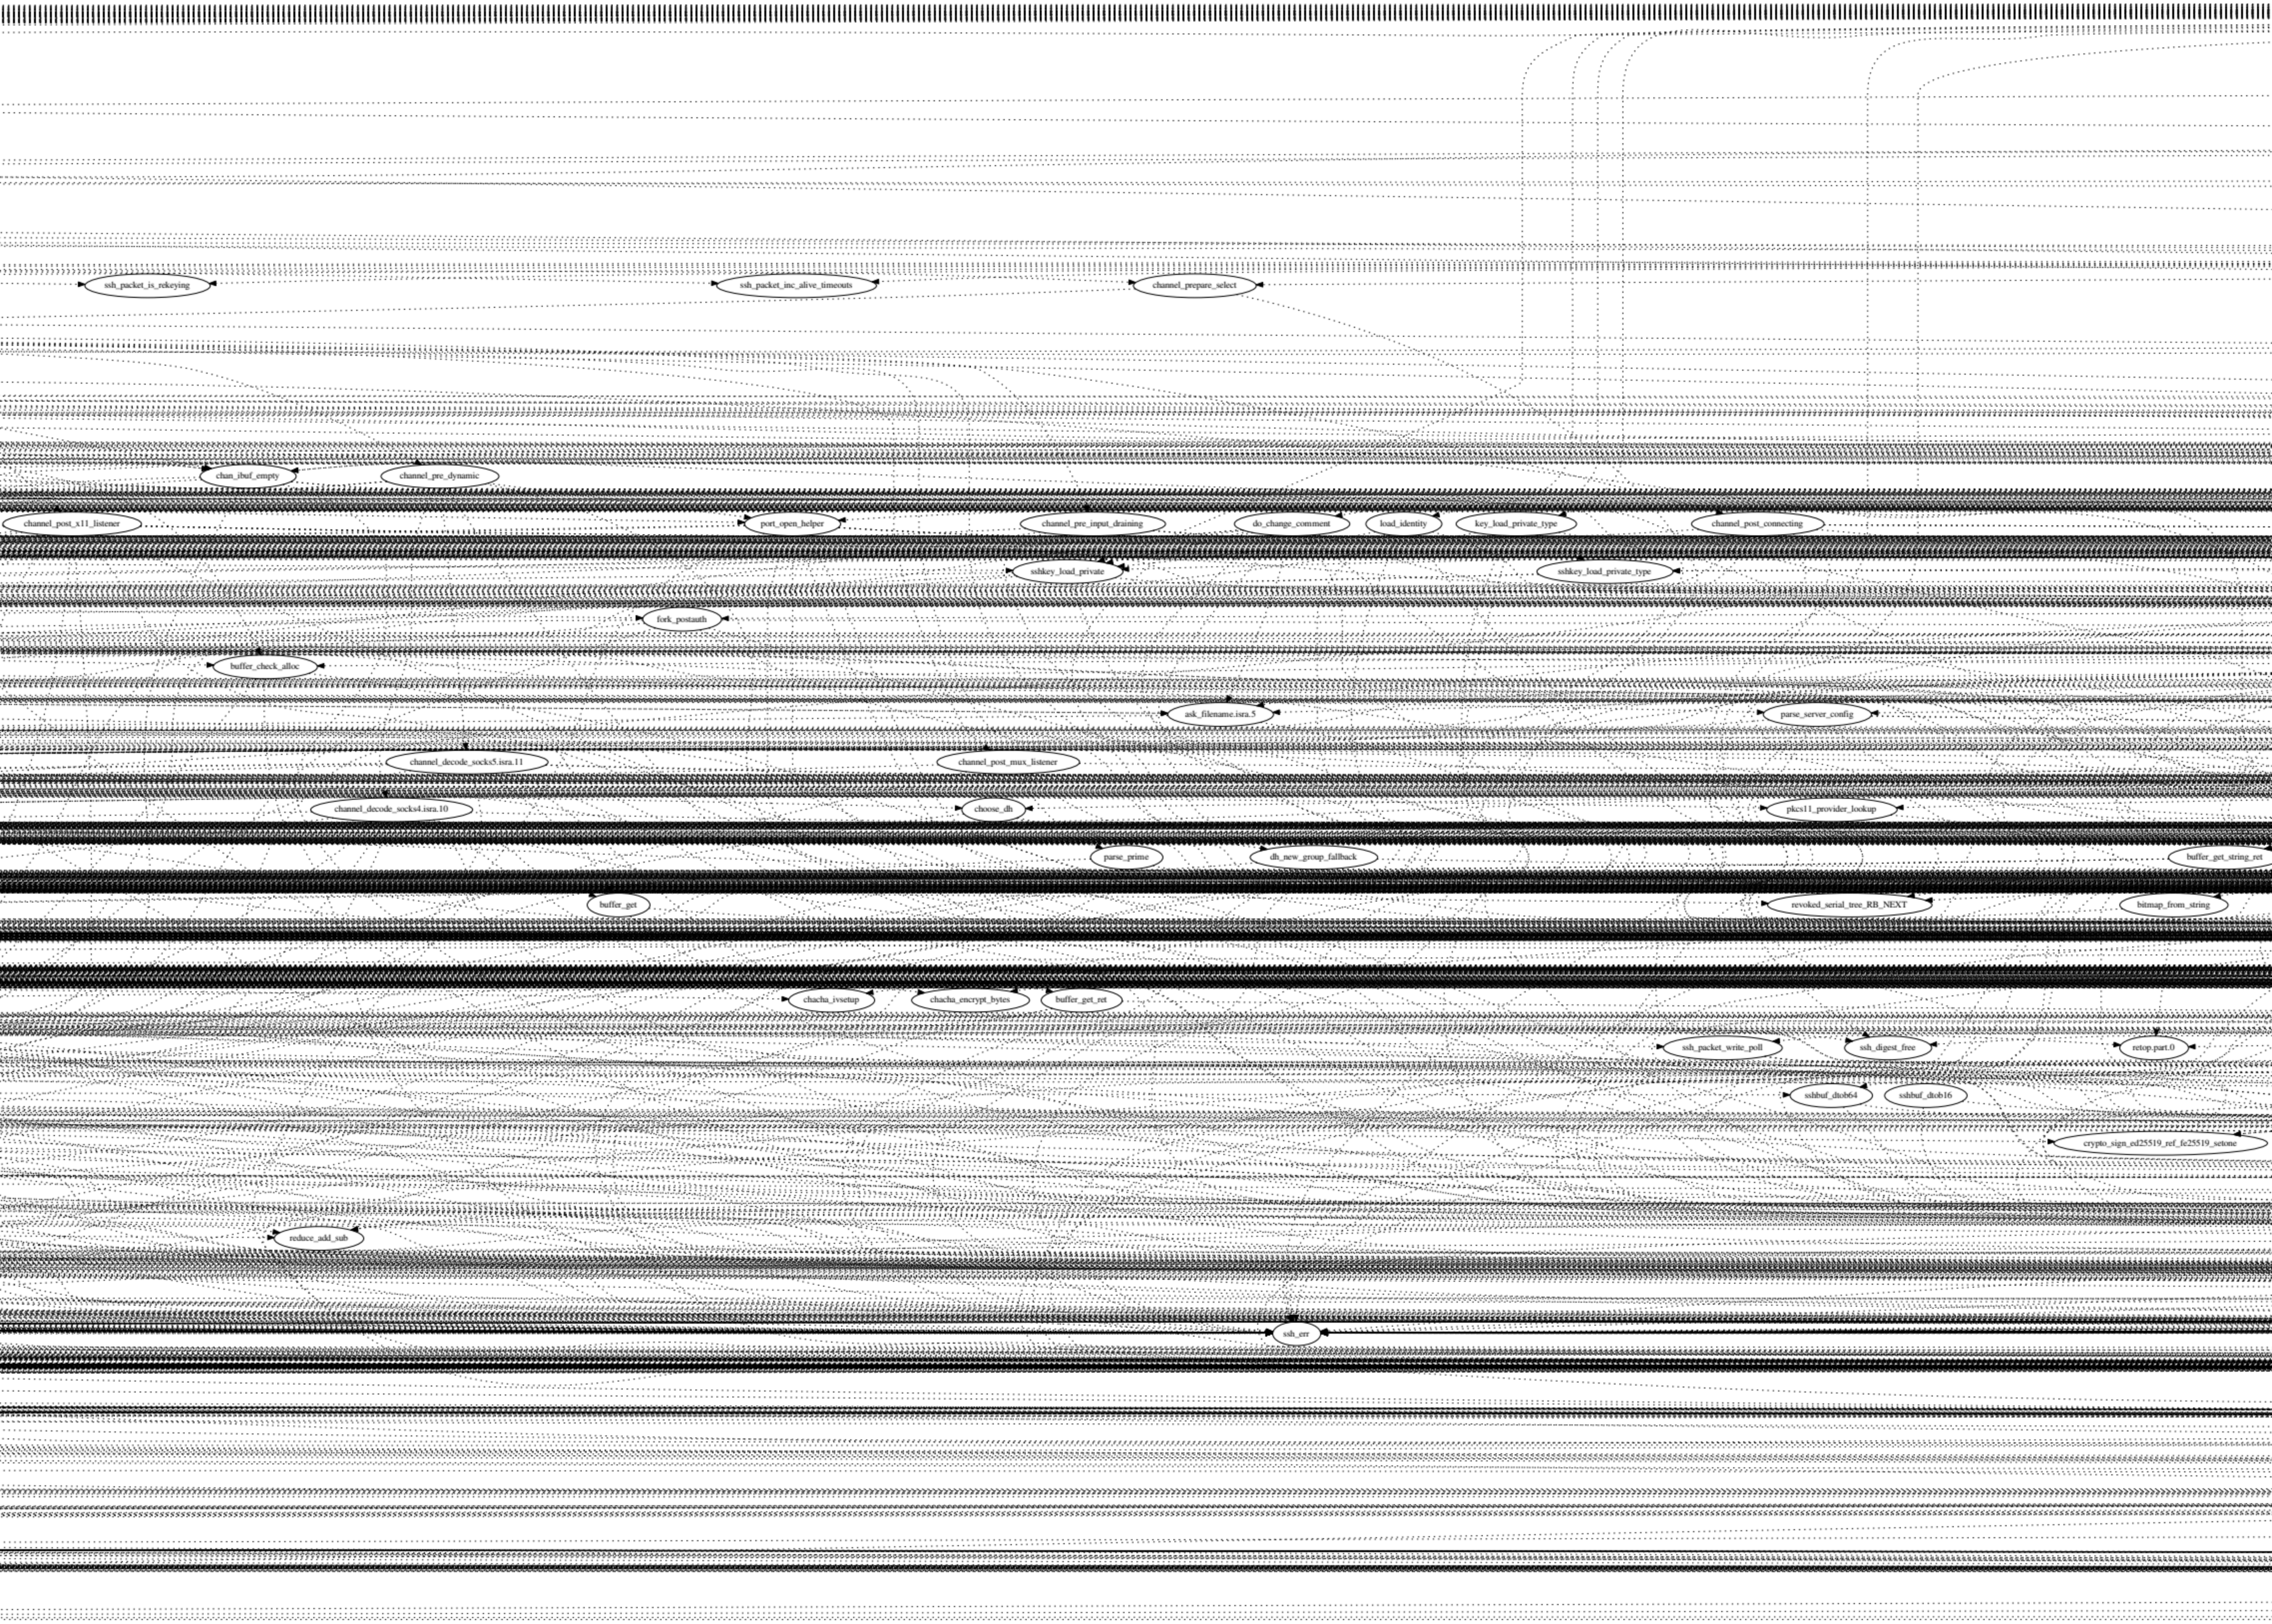
ssh_packet_is_rekeying
ssh_packet_inc_alive_timeouts
channel_prepare_select
chan_ibuf_empty
channel_pre_dynamic
channel_post_x11_listener
port_open_helper
channel_pre_input_draining
do_change_comment
load_identity
key_load_private_type
channel_post_connecting
sshkey_load_private
sshkey_load_private_type
fork_postauth
buffer_check_alloc
ask_filename.isra.5
parse_server_config
channel_decode_socks5.isra.11
channel_post_mux_listener
channel_decode_socks4.isra.10
choose_dh
pkcs11_provider_lookup
parse_prime
dh_new_group_fallback
buffer_get_string_ret
buffer_get
revoked_serial_tree_RB_NEXT
bitmap_from_string
chacha_ivsetup
chacha_encrypt_bytes
buffer_get_ret
ssh_packet_write_poll
ssh_digest_free
retop.part.0
sshbuf_dtob64
sshbuf_dtob16
crypto_sign_ed25519_ref_fe25519_setone
reduce_add_sub
ssh_err

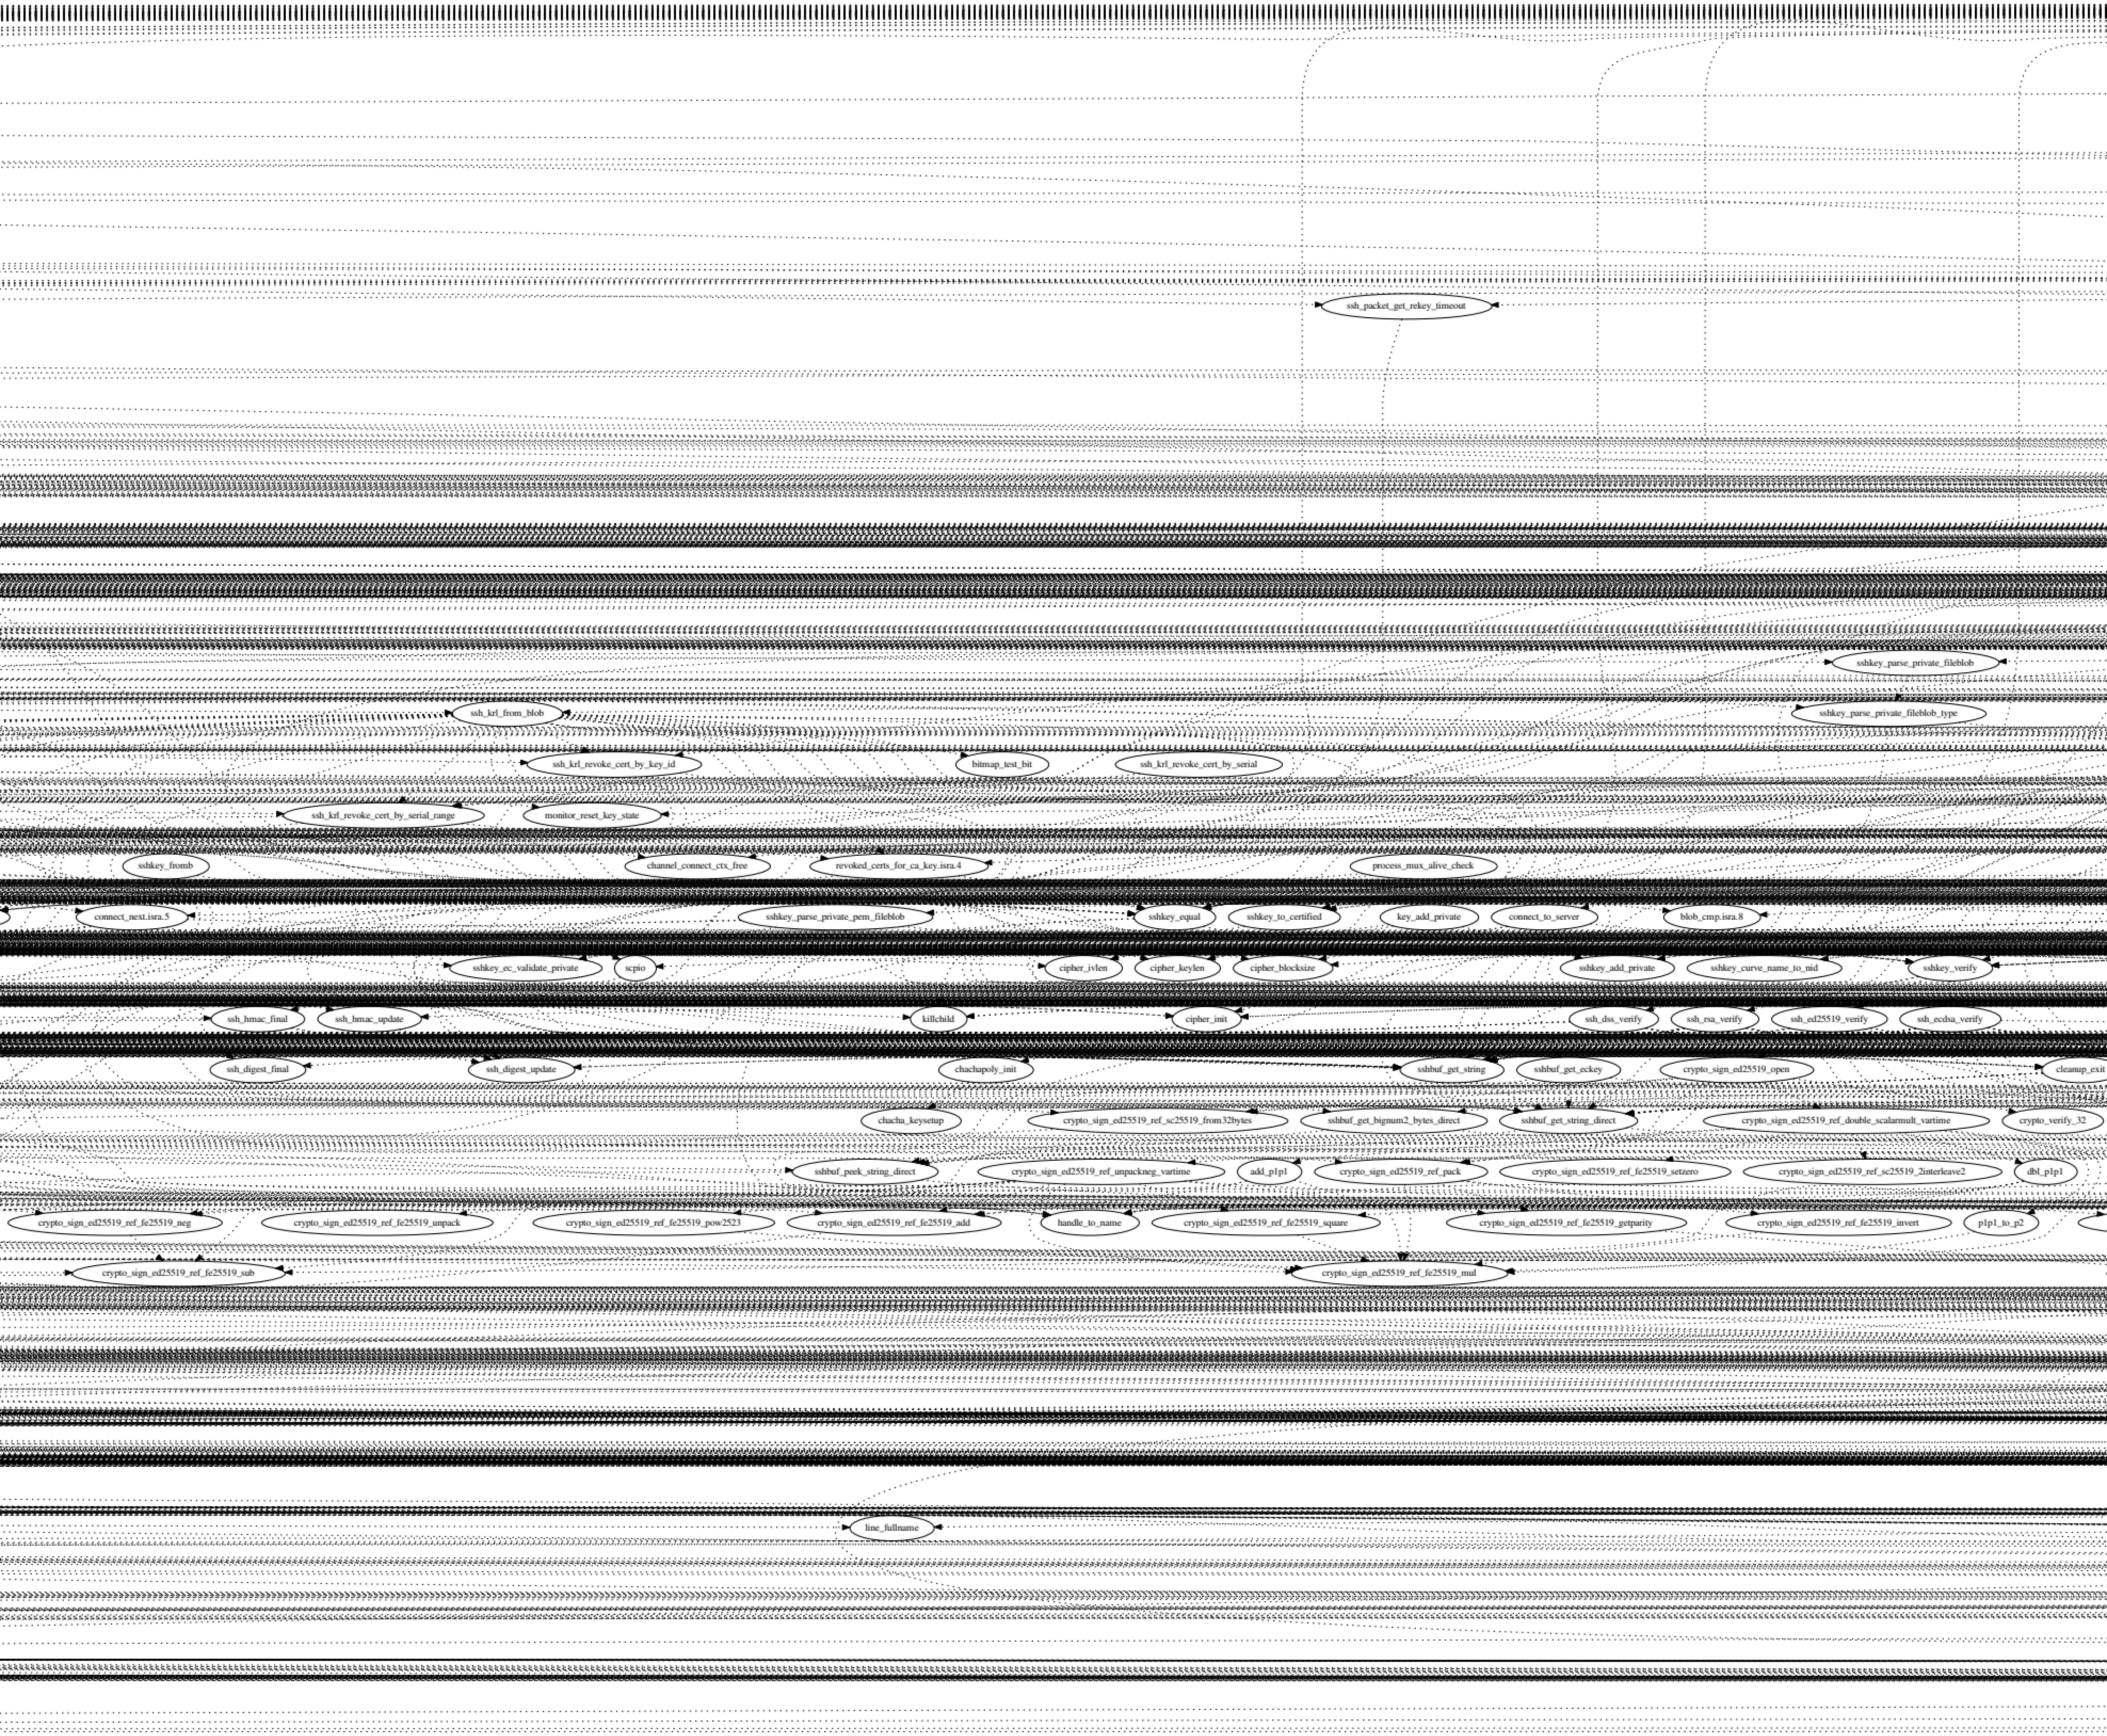
ssh_packet_get_rekey_timeout
sshkey_parse_private_fileblob
ssh_krl_from_blob
sshkey_parse_private_fileblob_type
ssh_krl_revoke_cert_by_key_id
bitmap_test_bit
ssh_krl_revoke_cert_by_serial
ssh_krl_revoke_cert_by_serial_range
monitor_reset_key_state
sshkey_fromb
channel_connect_ctx_free
revoked_certs_for_ca_key.isra.4
process_mux_alive_check
connect_next.isra.5
sshkey_parse_private_pem_fileblob
sshkey_equal
sshkey_to_certified
key_add_private
connect_to_server
blob_cmp.isra.8
sshkey_ec_validate_private
scpio
cipher_ivlen
cipher_keylen
cipher_blocksize
sshkey_add_private
sshkey_curve_name_to_nid
sshkey_verify
ssh_hmac_final
ssh_hmac_update
killchild
cipher_init
ssh_dss_verify
ssh_rsa_verify
ssh_ed25519_verify
ssh_ecdsa_verify
ssh_digest_final
ssh_digest_update
chachapoly_init
sshbuf_get_string
sshbuf_get_eckey
crypto_sign_ed25519_open
cleanup_exit
chacha_keysetup
crypto_sign_ed25519_ref_sc25519_from32bytes
sshbuf_get_bignum2_bytes_direct
sshbuf_get_string_direct
crypto_sign_ed25519_ref_double_scalarmult_vartime
crypto_verify_32
sshbuf_peek_string_direct
crypto_sign_ed25519_ref_unpackneg_vartime
add_p1p1
crypto_sign_ed25519_ref_pack
crypto_sign_ed25519_ref_fe25519_setzero
crypto_sign_ed25519_ref_sc25519_2interleave2
dbl_p1p1
crypto_sign_ed25519_ref_fe25519_neg
crypto_sign_ed25519_ref_fe25519_unpack
crypto_sign_ed25519_ref_fe25519_pow2523
crypto_sign_ed25519_ref_fe25519_add
handle_to_name
crypto_sign_ed25519_ref_fe25519_square
crypto_sign_ed25519_ref_fe25519_getparity
crypto_sign_ed25519_ref_fe25519_invert
p1p1_to_p2
crypto_sign_ed25519_ref_fe25519_sub
crypto_sign_ed25519_ref_fe25519_mul
line_fullname

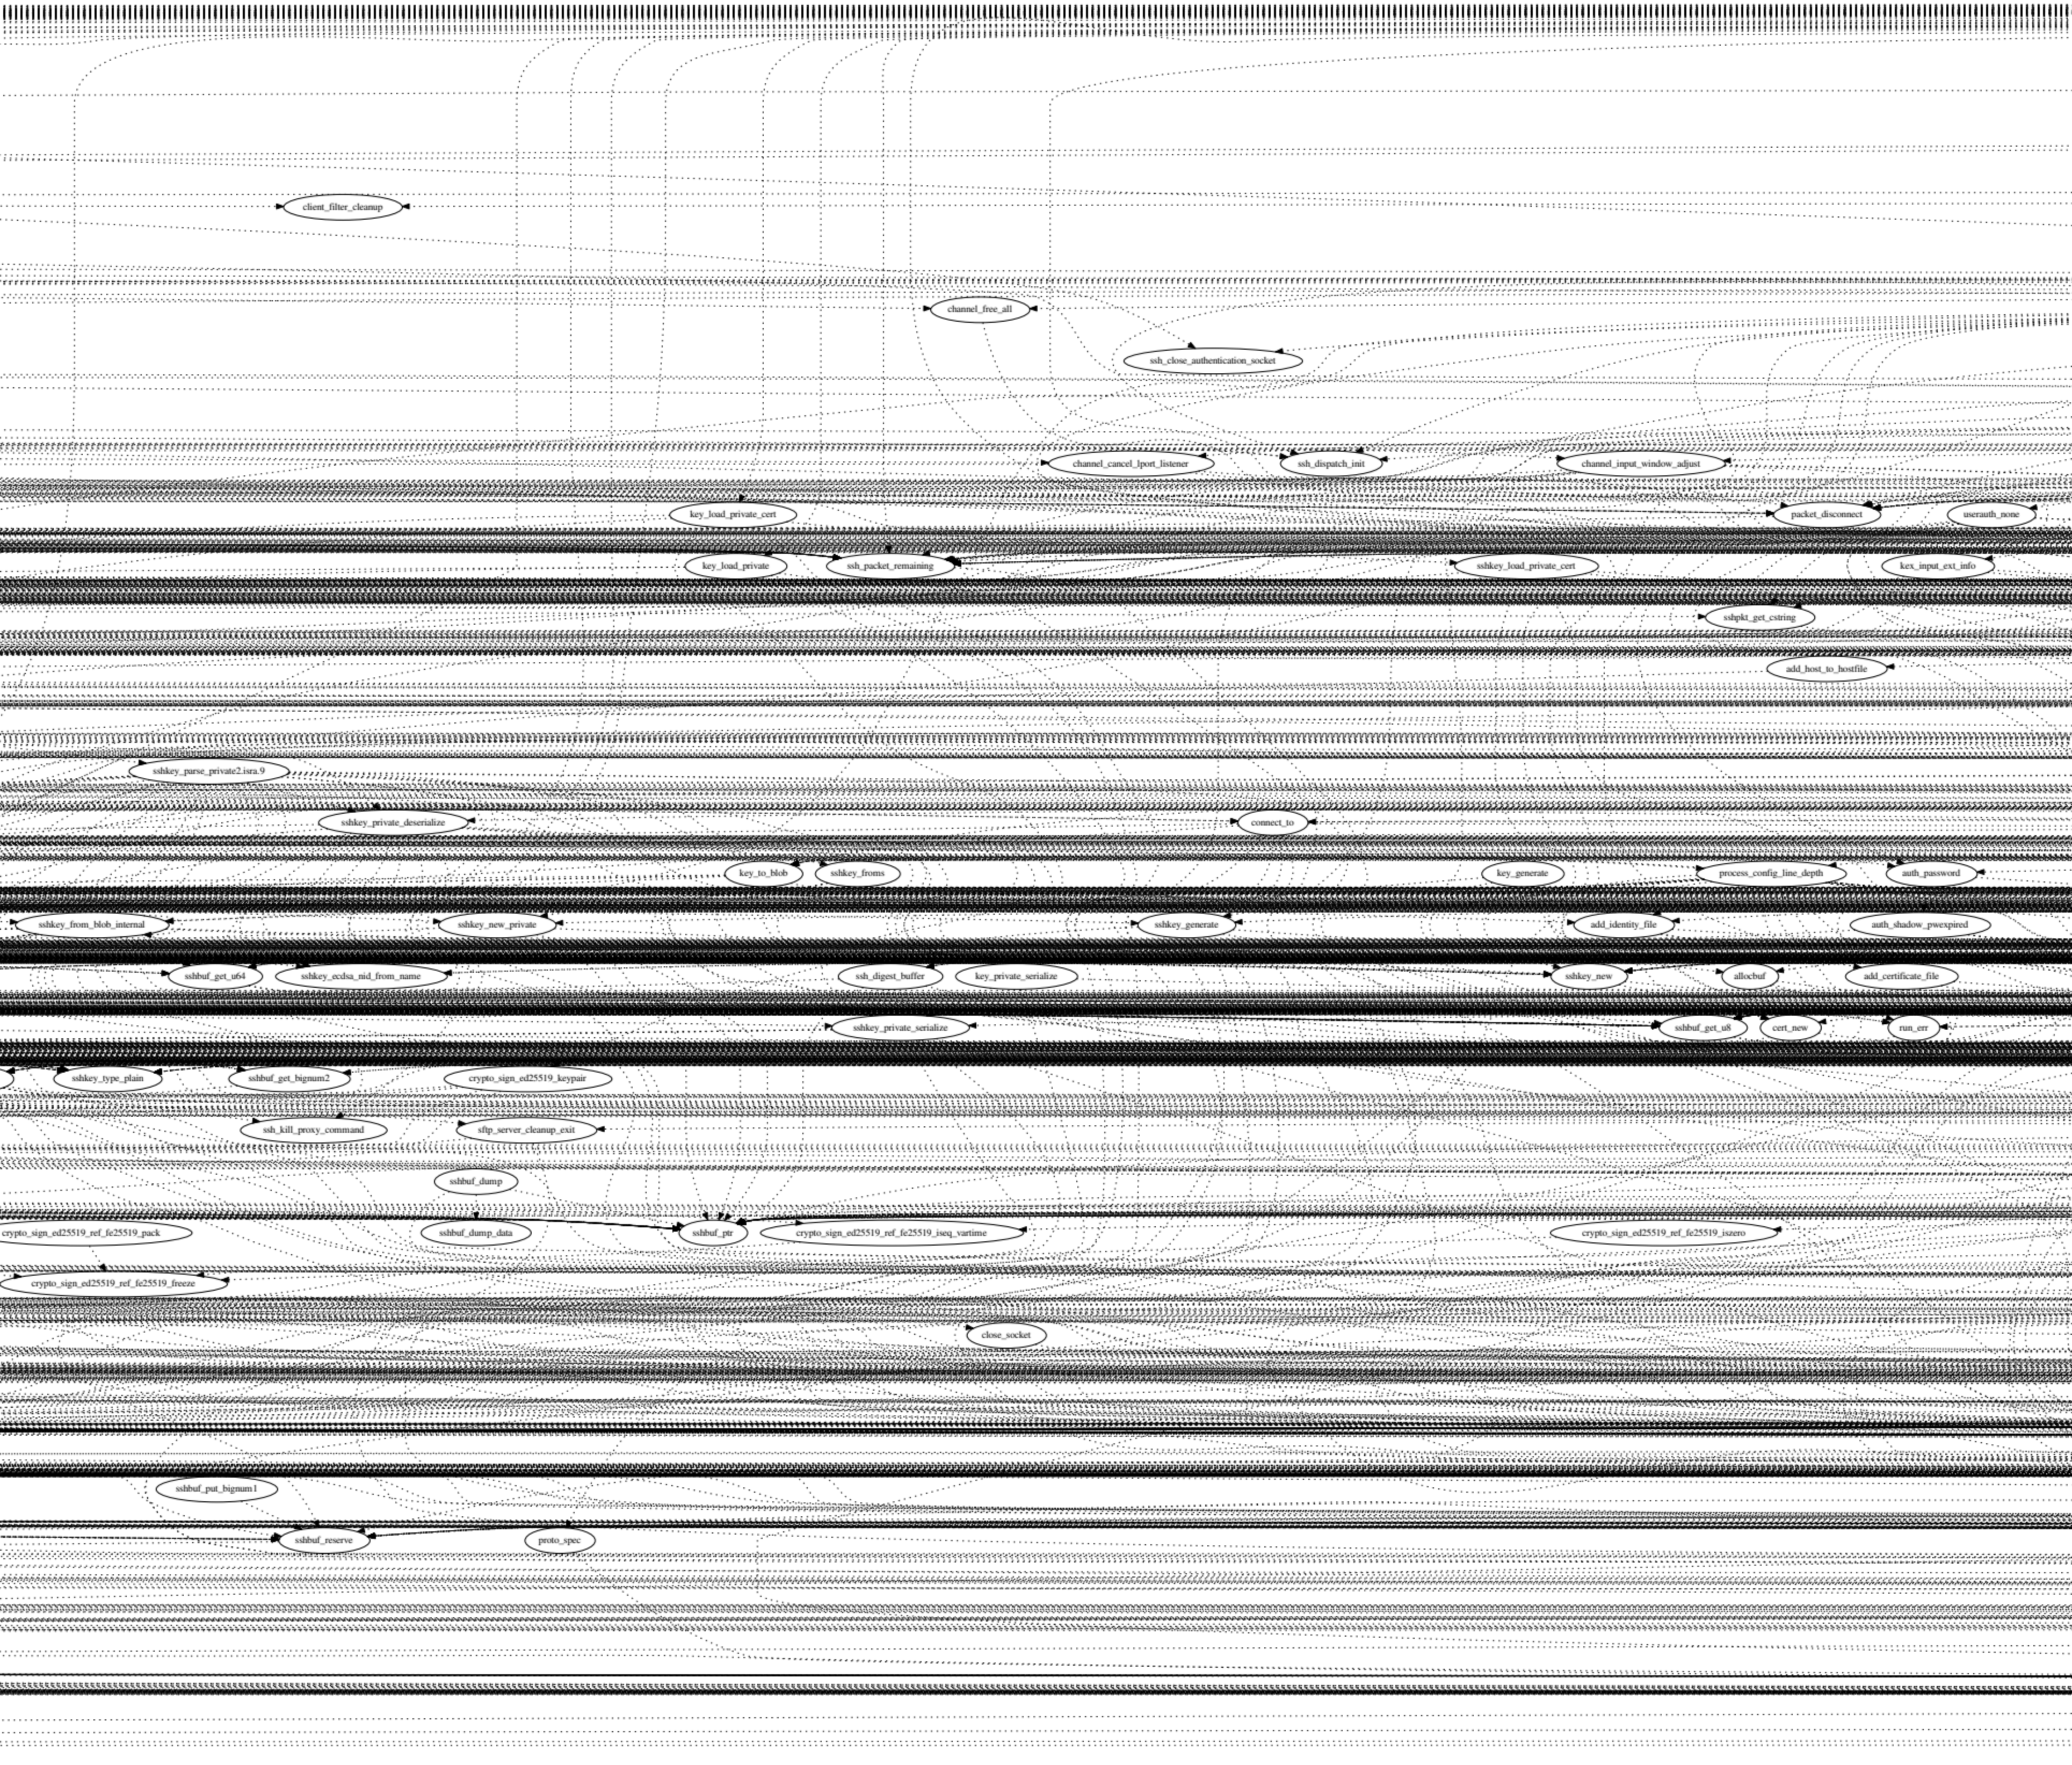
client_filter_cleanup
channel_free_all
ssh_close_authentication_socket
channel_cancel_lport_listener
ssh_dispatch_init
channel_input_window_adjust
key_load_private_cert
packet_disconnect
userauth_none
key_load_private
ssh_packet_remaining
sshkey_load_private_cert
kex_input_ext_info
sshpkt_get_cstring
add_host_to_hostfile
sshkey_parse_private2.isra.9
sshkey_private_deserialize
connect_to
key_to_blob
sshkey_froms
key_generate
process_config_line_depth
auth_password
sshkey_from_blob_internal
sshkey_new_private
sshkey_generate
add_identity_file
auth_shadow_pwexpired
sshbuf_get_u64
sshkey_ecdsa_nid_from_name
ssh_digest_buffer
key_private_serialize
sshkey_new
allocbuf
add_certificate_file
sshkey_private_serialize
sshbuf_get_u8
cert_new
run_err
sshkey_type_plain
sshbuf_get_bignum2
crypto_sign_ed25519_keypair
ssh_kill_proxy_command
sftp_server_cleanup_exit
sshbuf_dump
crypto_sign_ed25519_ref_fe25519_pack
sshbuf_dump_data
sshbuf_ptr
crypto_sign_ed25519_ref_fe25519_iseq_vartime
crypto_sign_ed25519_ref_fe25519_iszero
crypto_sign_ed25519_ref_fe25519_freeze
close_socket
sshbuf_put_bignum1
sshbuf_reserve
proto_spec

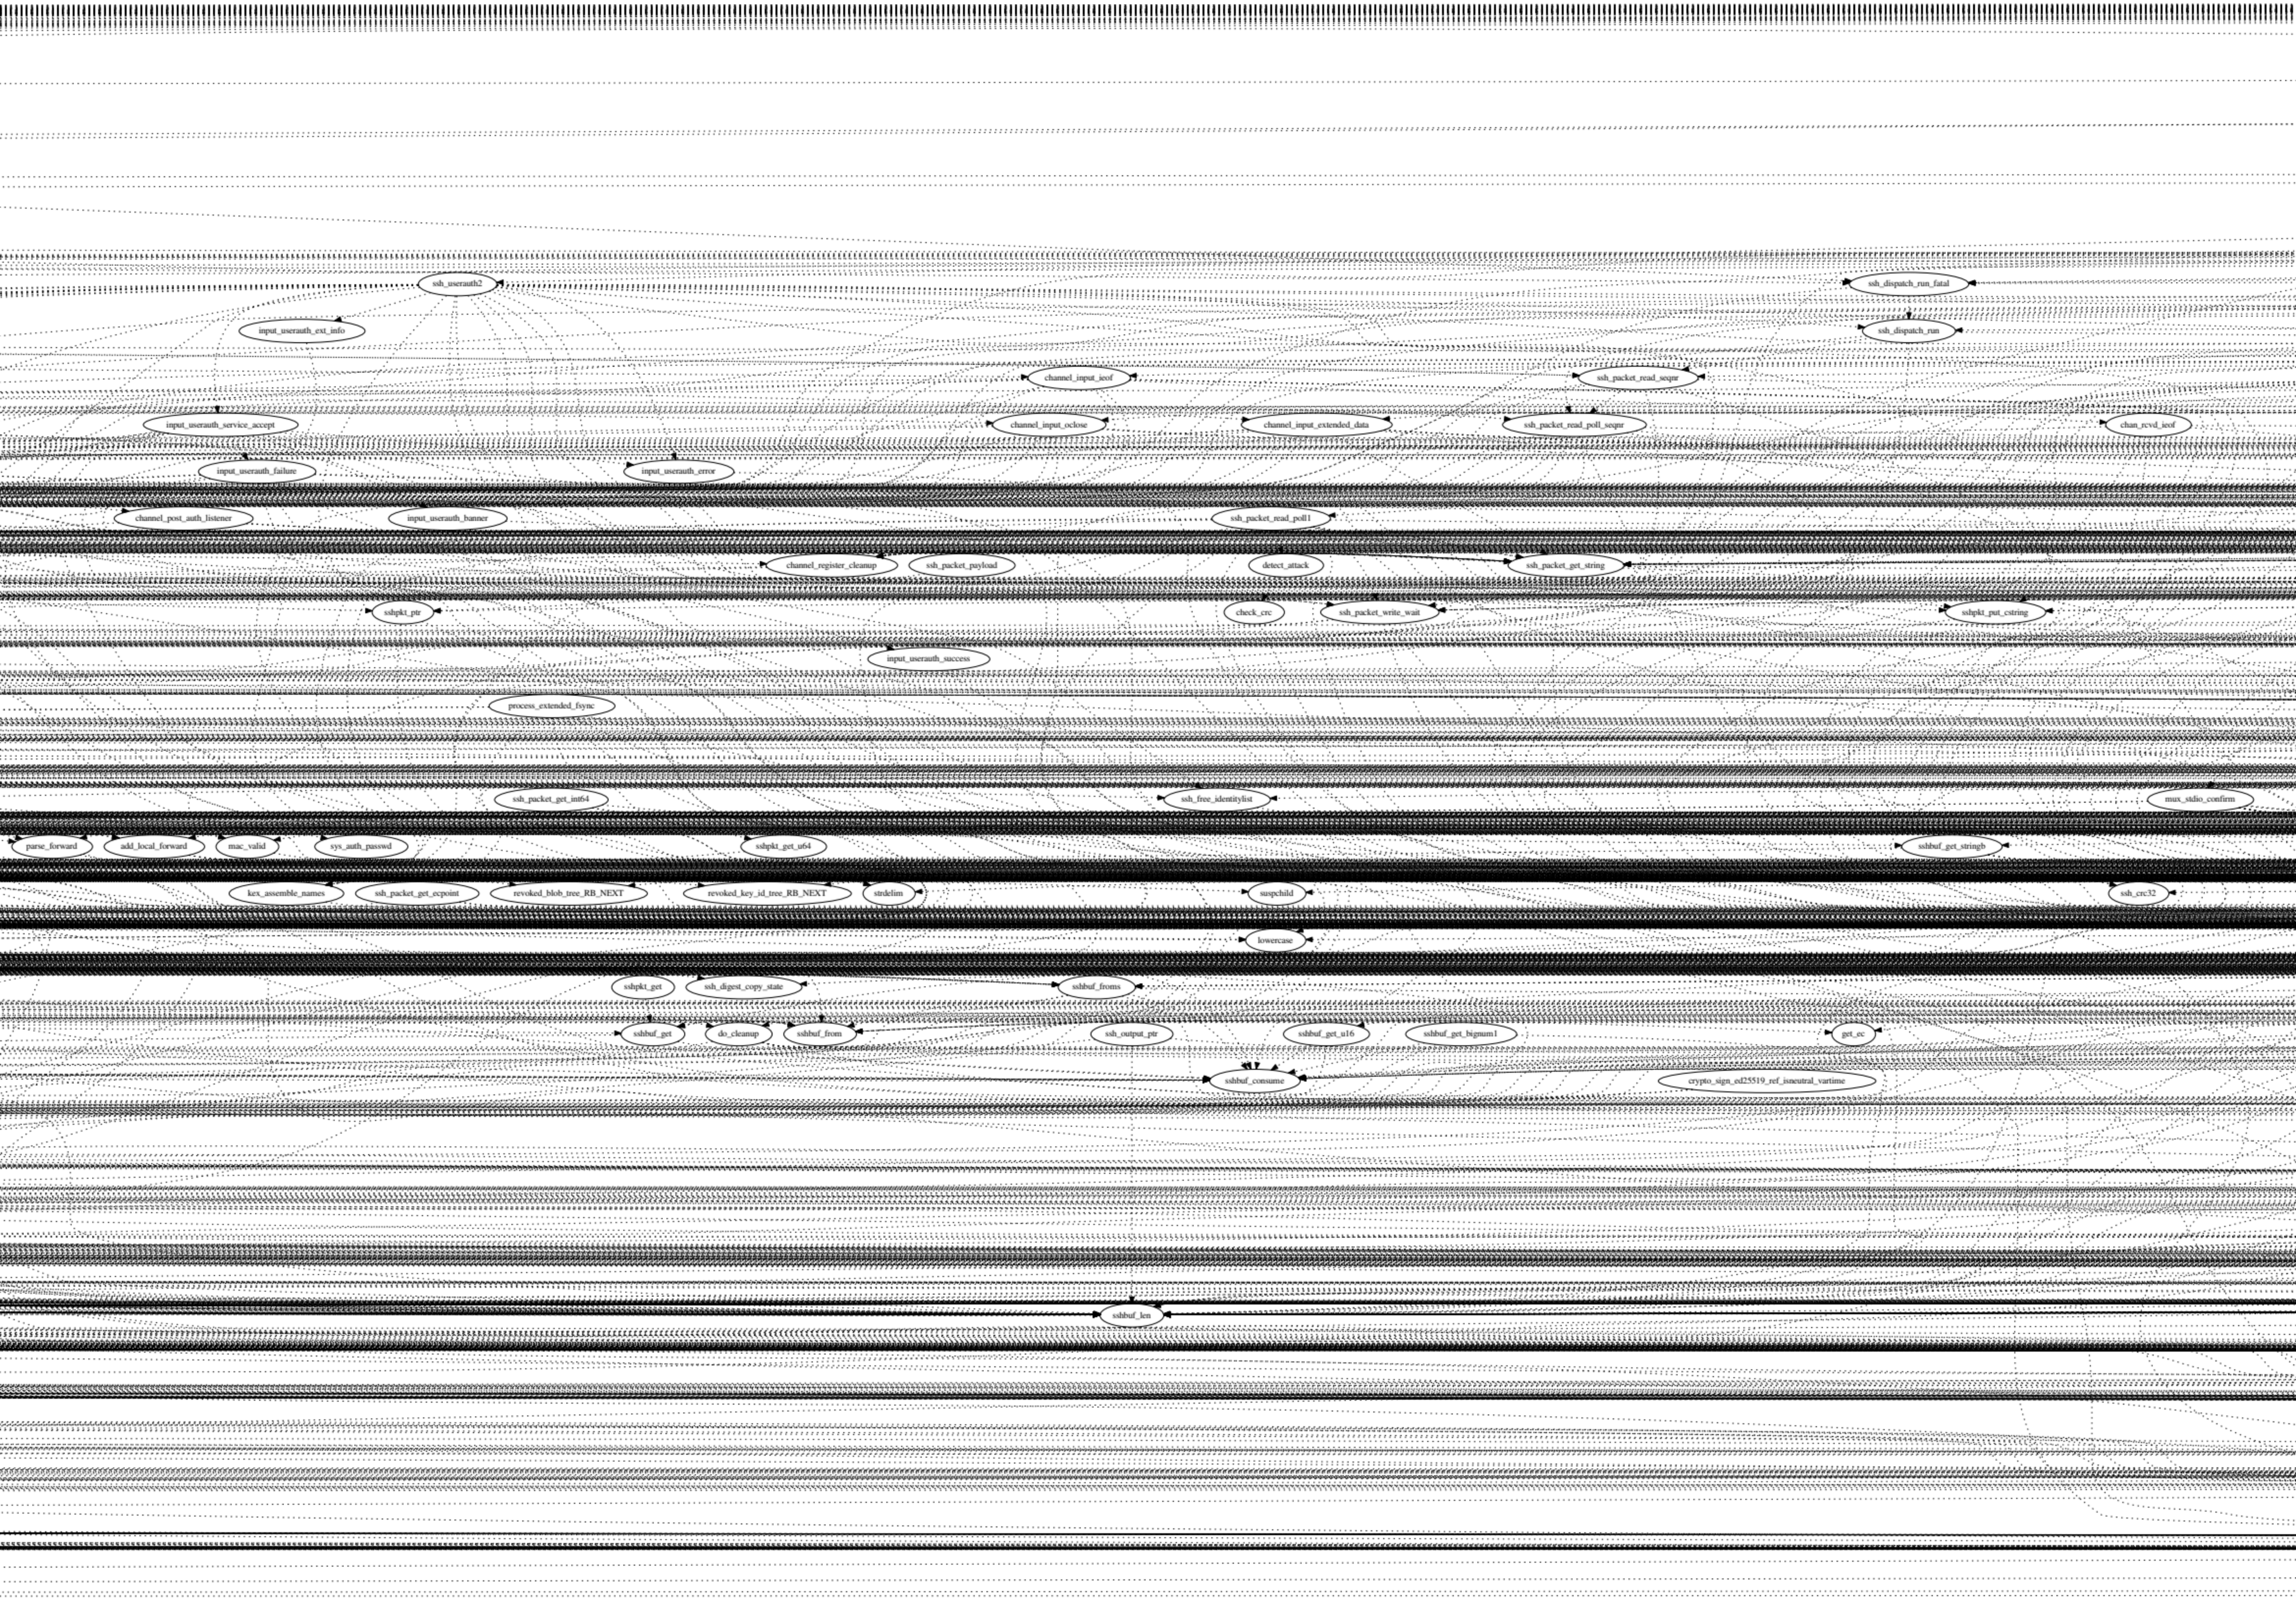
ssh_userauth2
ssh_dispatch_run_fatal
input_userauth_ext_info
ssh_dispatch_run
channel_input_ieof
ssh_packet_read_seqnr
input_userauth_service_accept
channel_input_oclose
channel_input_extended_data
ssh_packet_read_poll_seqnr
chan_rcvd_ieof
input_userauth_failure
input_userauth_error
channel_post_auth_listener
input_userauth_banner
ssh_packet_read_poll1
channel_register_cleanup
ssh_packet_payload
detect_attack
ssh_packet_get_string
sshpkt_ptr
check_crc
ssh_packet_write_wait
sshpkt_put_cstring
input_userauth_success
process_extended_fsync
ssh_packet_get_int64
ssh_free_identitylist
mux_stdio_confirm
parse_forward
add_local_forward
mac_valid
sys_auth_passwd
sshpkt_get_u64
sshbuf_get_stringb
kex_assemble_names
ssh_packet_get_ecpoint
revoked_blob_tree_RB_NEXT
revoked_key_id_tree_RB_NEXT
strdelim
suspchild
ssh_crc32
lowercase
sshpkt_get
ssh_digest_copy_state
sshbuf_froms
sshbuf_get
do_cleanup
sshbuf_from
ssh_output_ptr
sshbuf_get_u16
sshbuf_get_bignum1
get_ec
sshbuf_consume
crypto_sign_ed25519_ref_isneutral_vartime
sshbuf_len

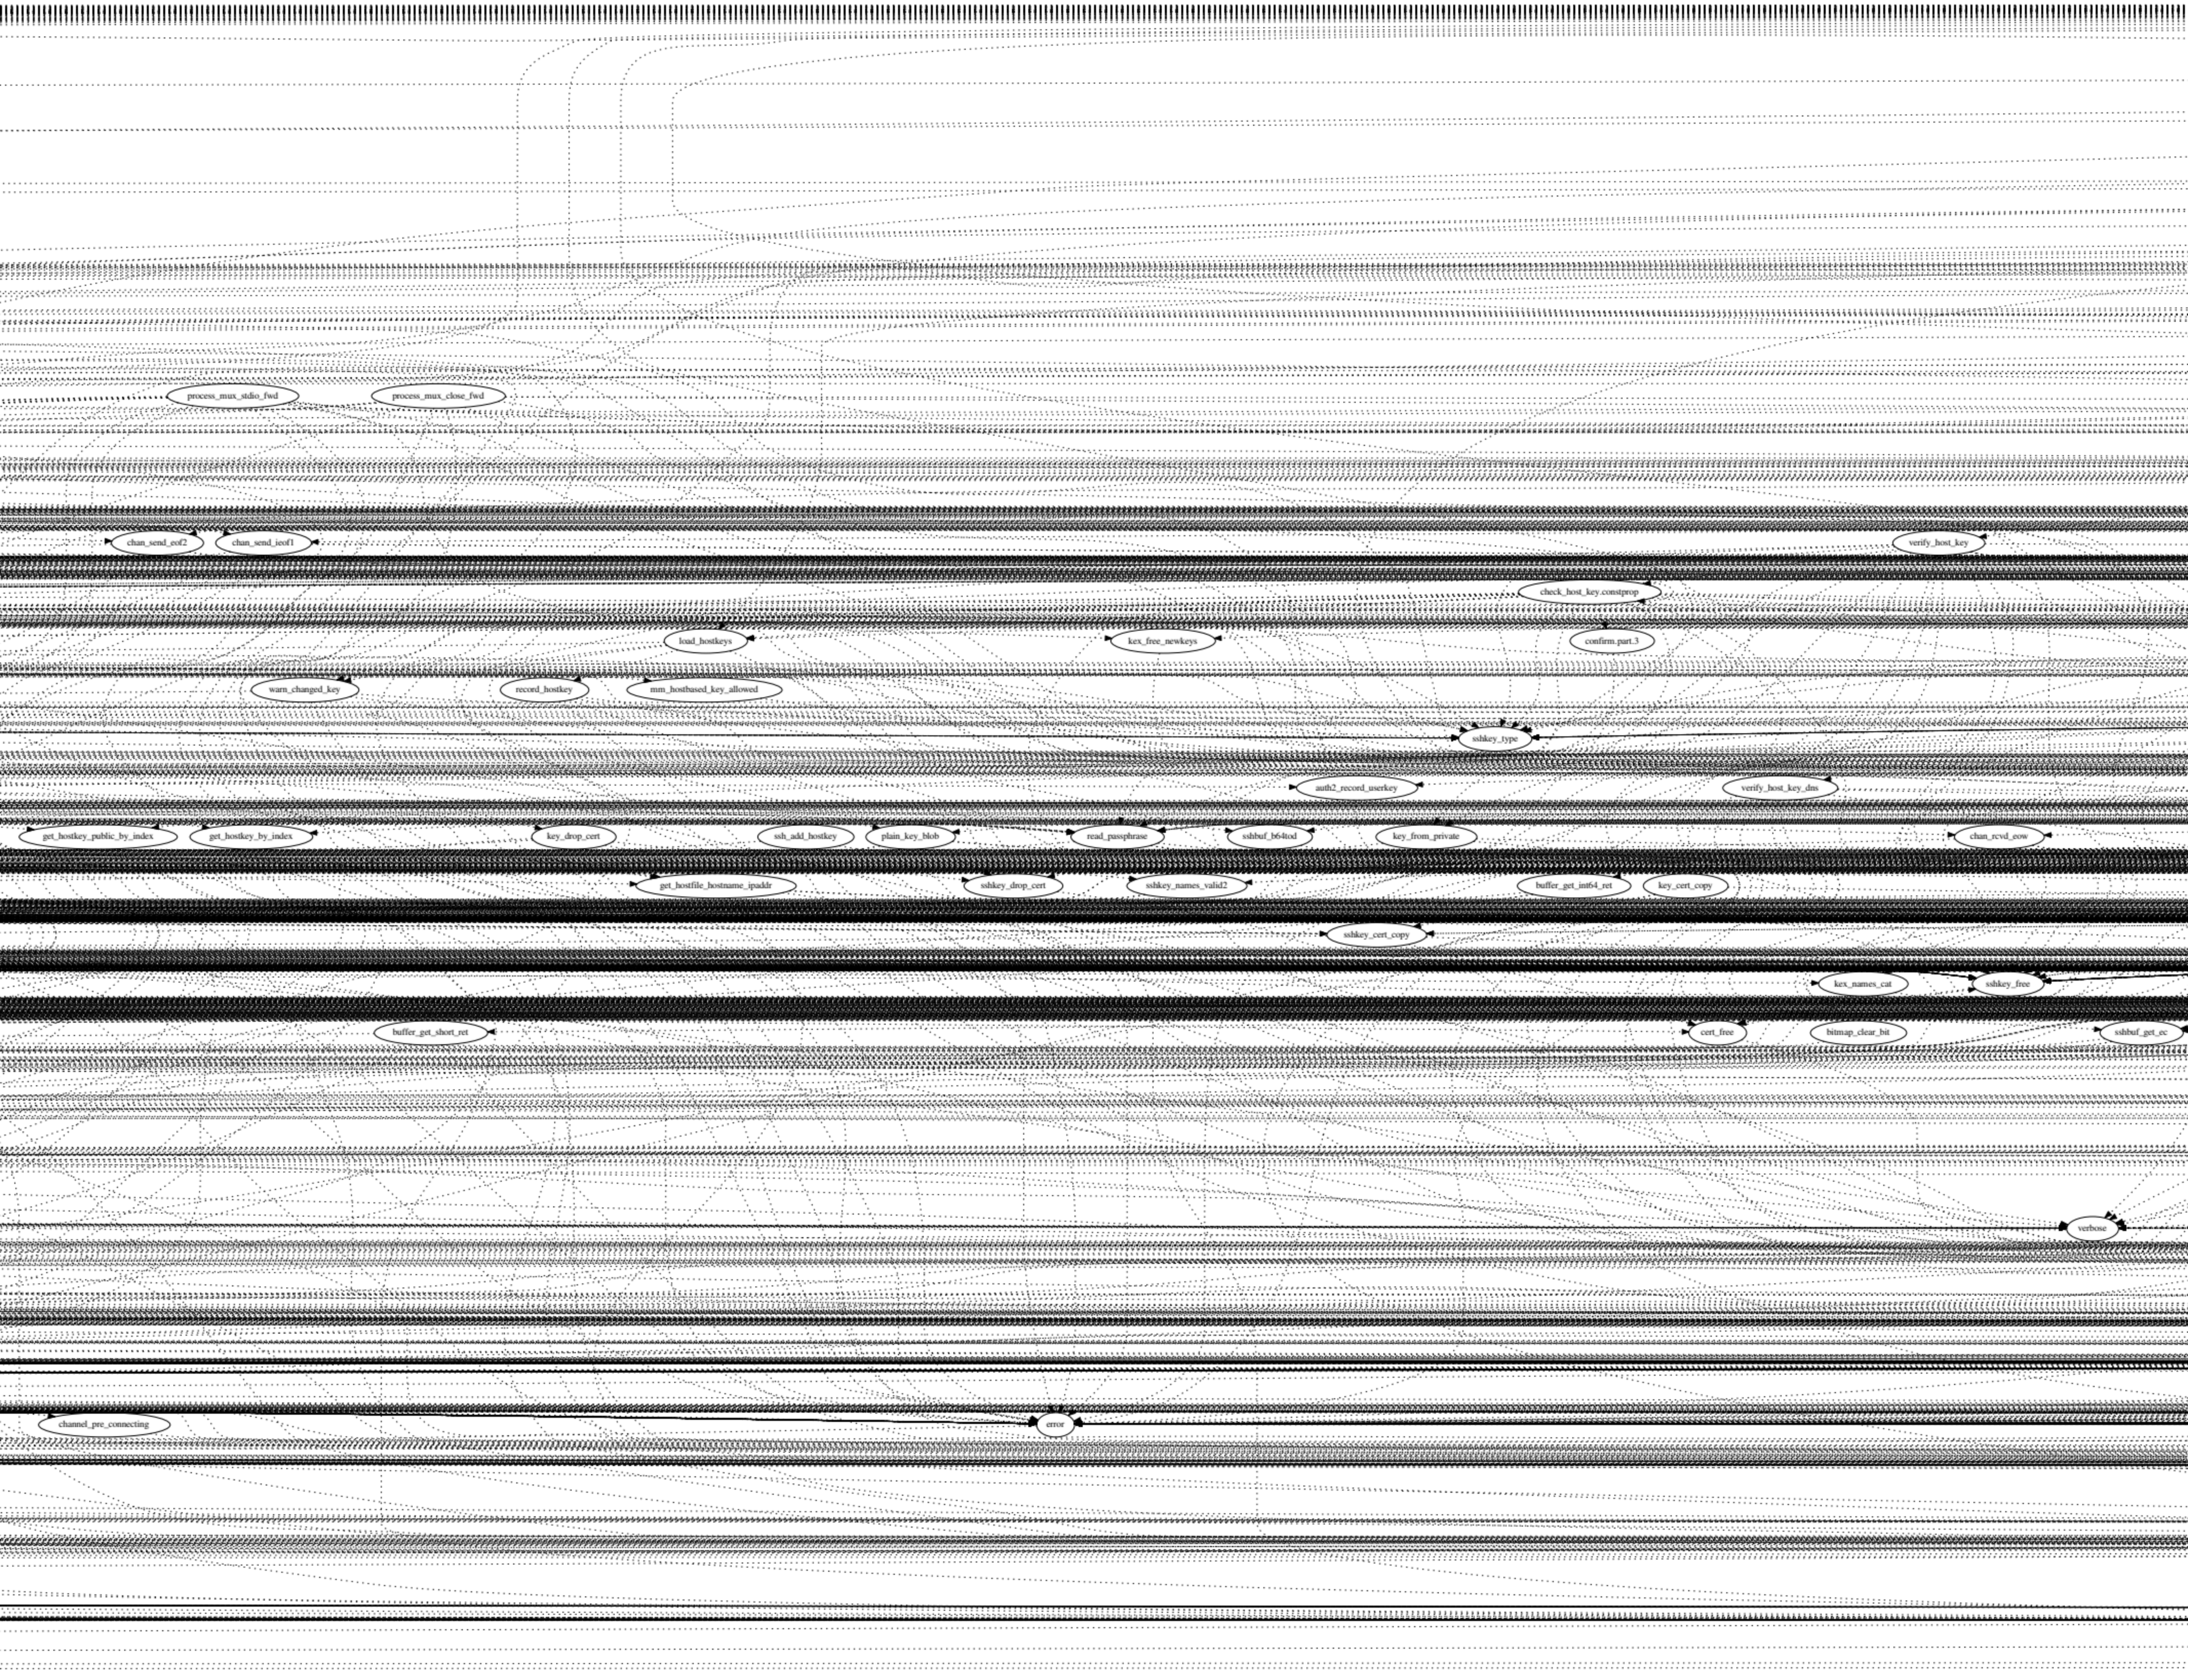
process_mux_stdio_fwd
process_mux_close_fwd
chan_send_eof2
chan_send_ieof1
verify_host_key
check_host_key.constprop
load_hostkeys
kex_free_newkeys
confirm.part.3
warn_changed_key
record_hostkey
mm_hostbased_key_allowed
sshkey_type
auth2_record_userkey
verify_host_key_dns
get_hostkey_public_by_index
get_hostkey_by_index
key_drop_cert
ssh_add_hostkey
plain_key_blob
read_passphrase
sshbuf_b64tod
key_from_private
chan_rcvd_eow
get_hostfile_hostname_ipaddr
sshkey_drop_cert
sshkey_names_valid2
buffer_get_int64_ret
key_cert_copy
sshkey_cert_copy
kex_names_cat
sshkey_free
buffer_get_short_ret
cert_free
bitmap_clear_bit
sshbuf_get_ec
verbose
channel_pre_connecting
error

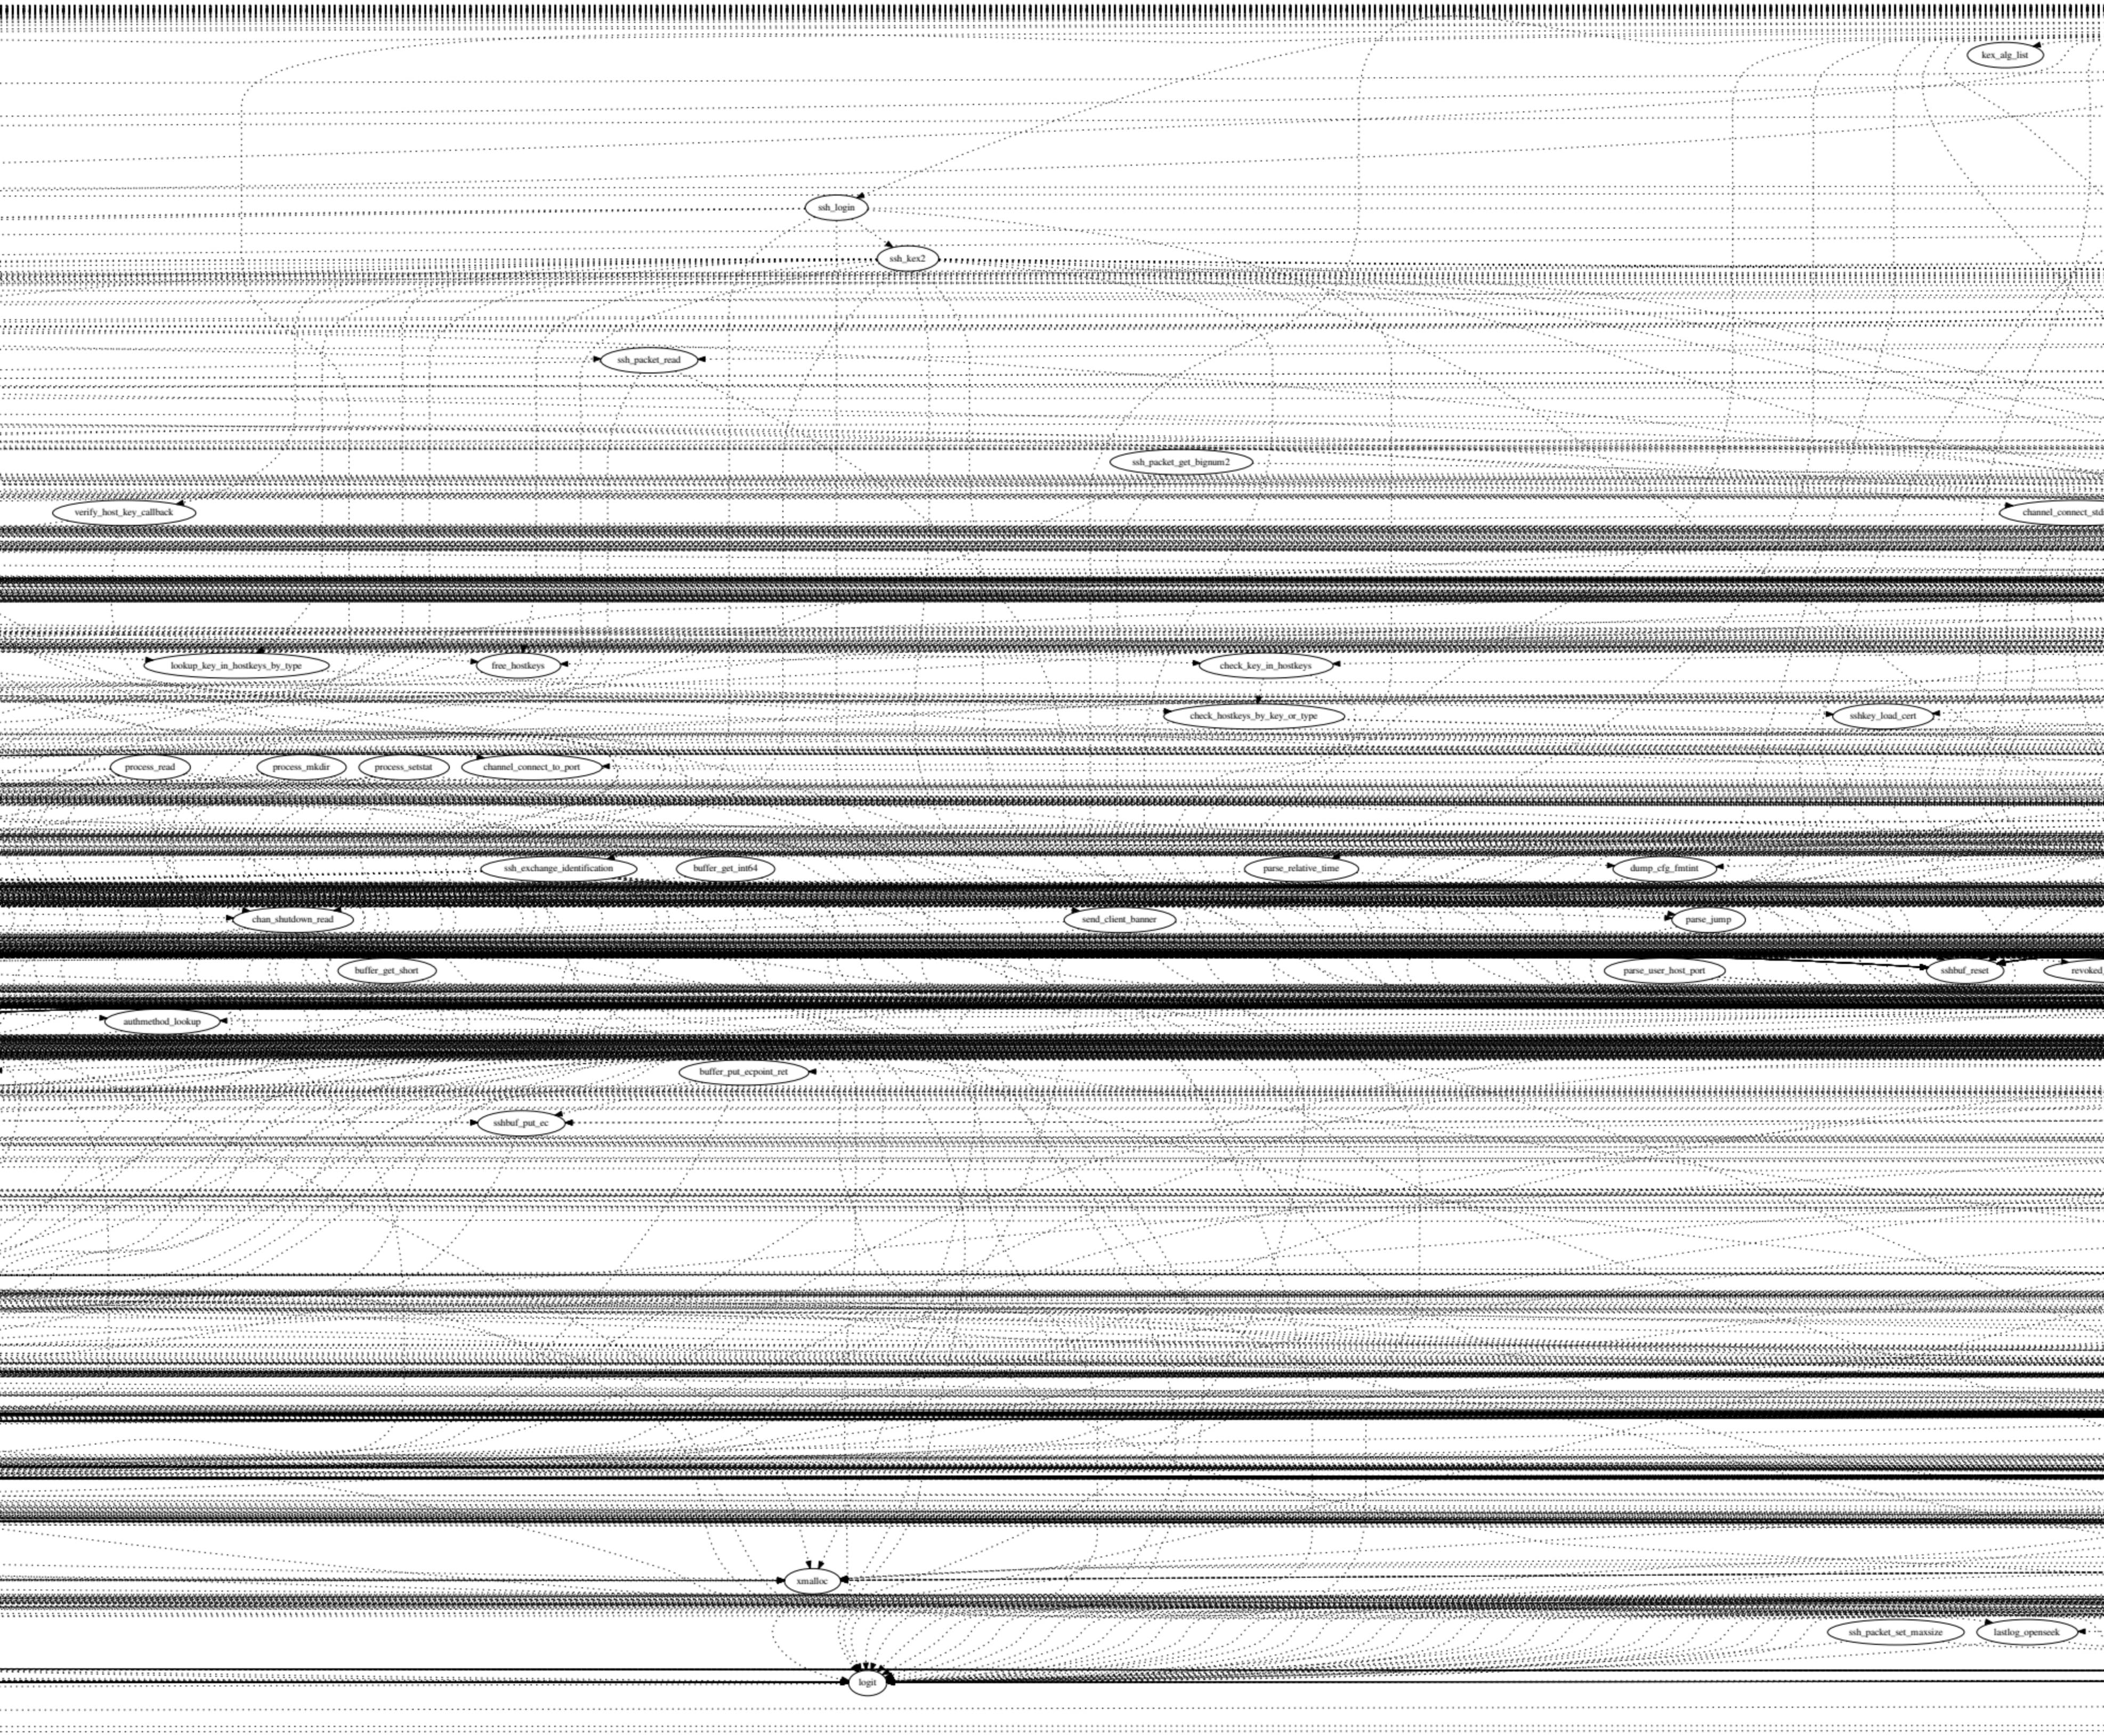
kex_alg_list
ssh_login
ssh_kex2
ssh_packet_read
ssh_packet_get_bignum2
verify_host_key_callback
channel_connect_std
lookup_key_in_hostkeys_by_type
free_hostkeys
check_key_in_hostkeys
check_hostkeys_by_key_or_type
sshkey_load_cert
process_read
process_mkdir
process_setstat
channel_connect_to_port
ssh_exchange_identification
buffer_get_int64
parse_relative_time
dump_cfg_fmtint
chan_shutdown_read
send_client_banner
parse_jump
buffer_get_short
parse_user_host_port
sshbuf_reset
revoked
authmethod_lookup
buffer_put_ecpoint_ret
sshbuf_put_ec
xmalloc
ssh_packet_set_maxsize
lastlog_openseek
logit

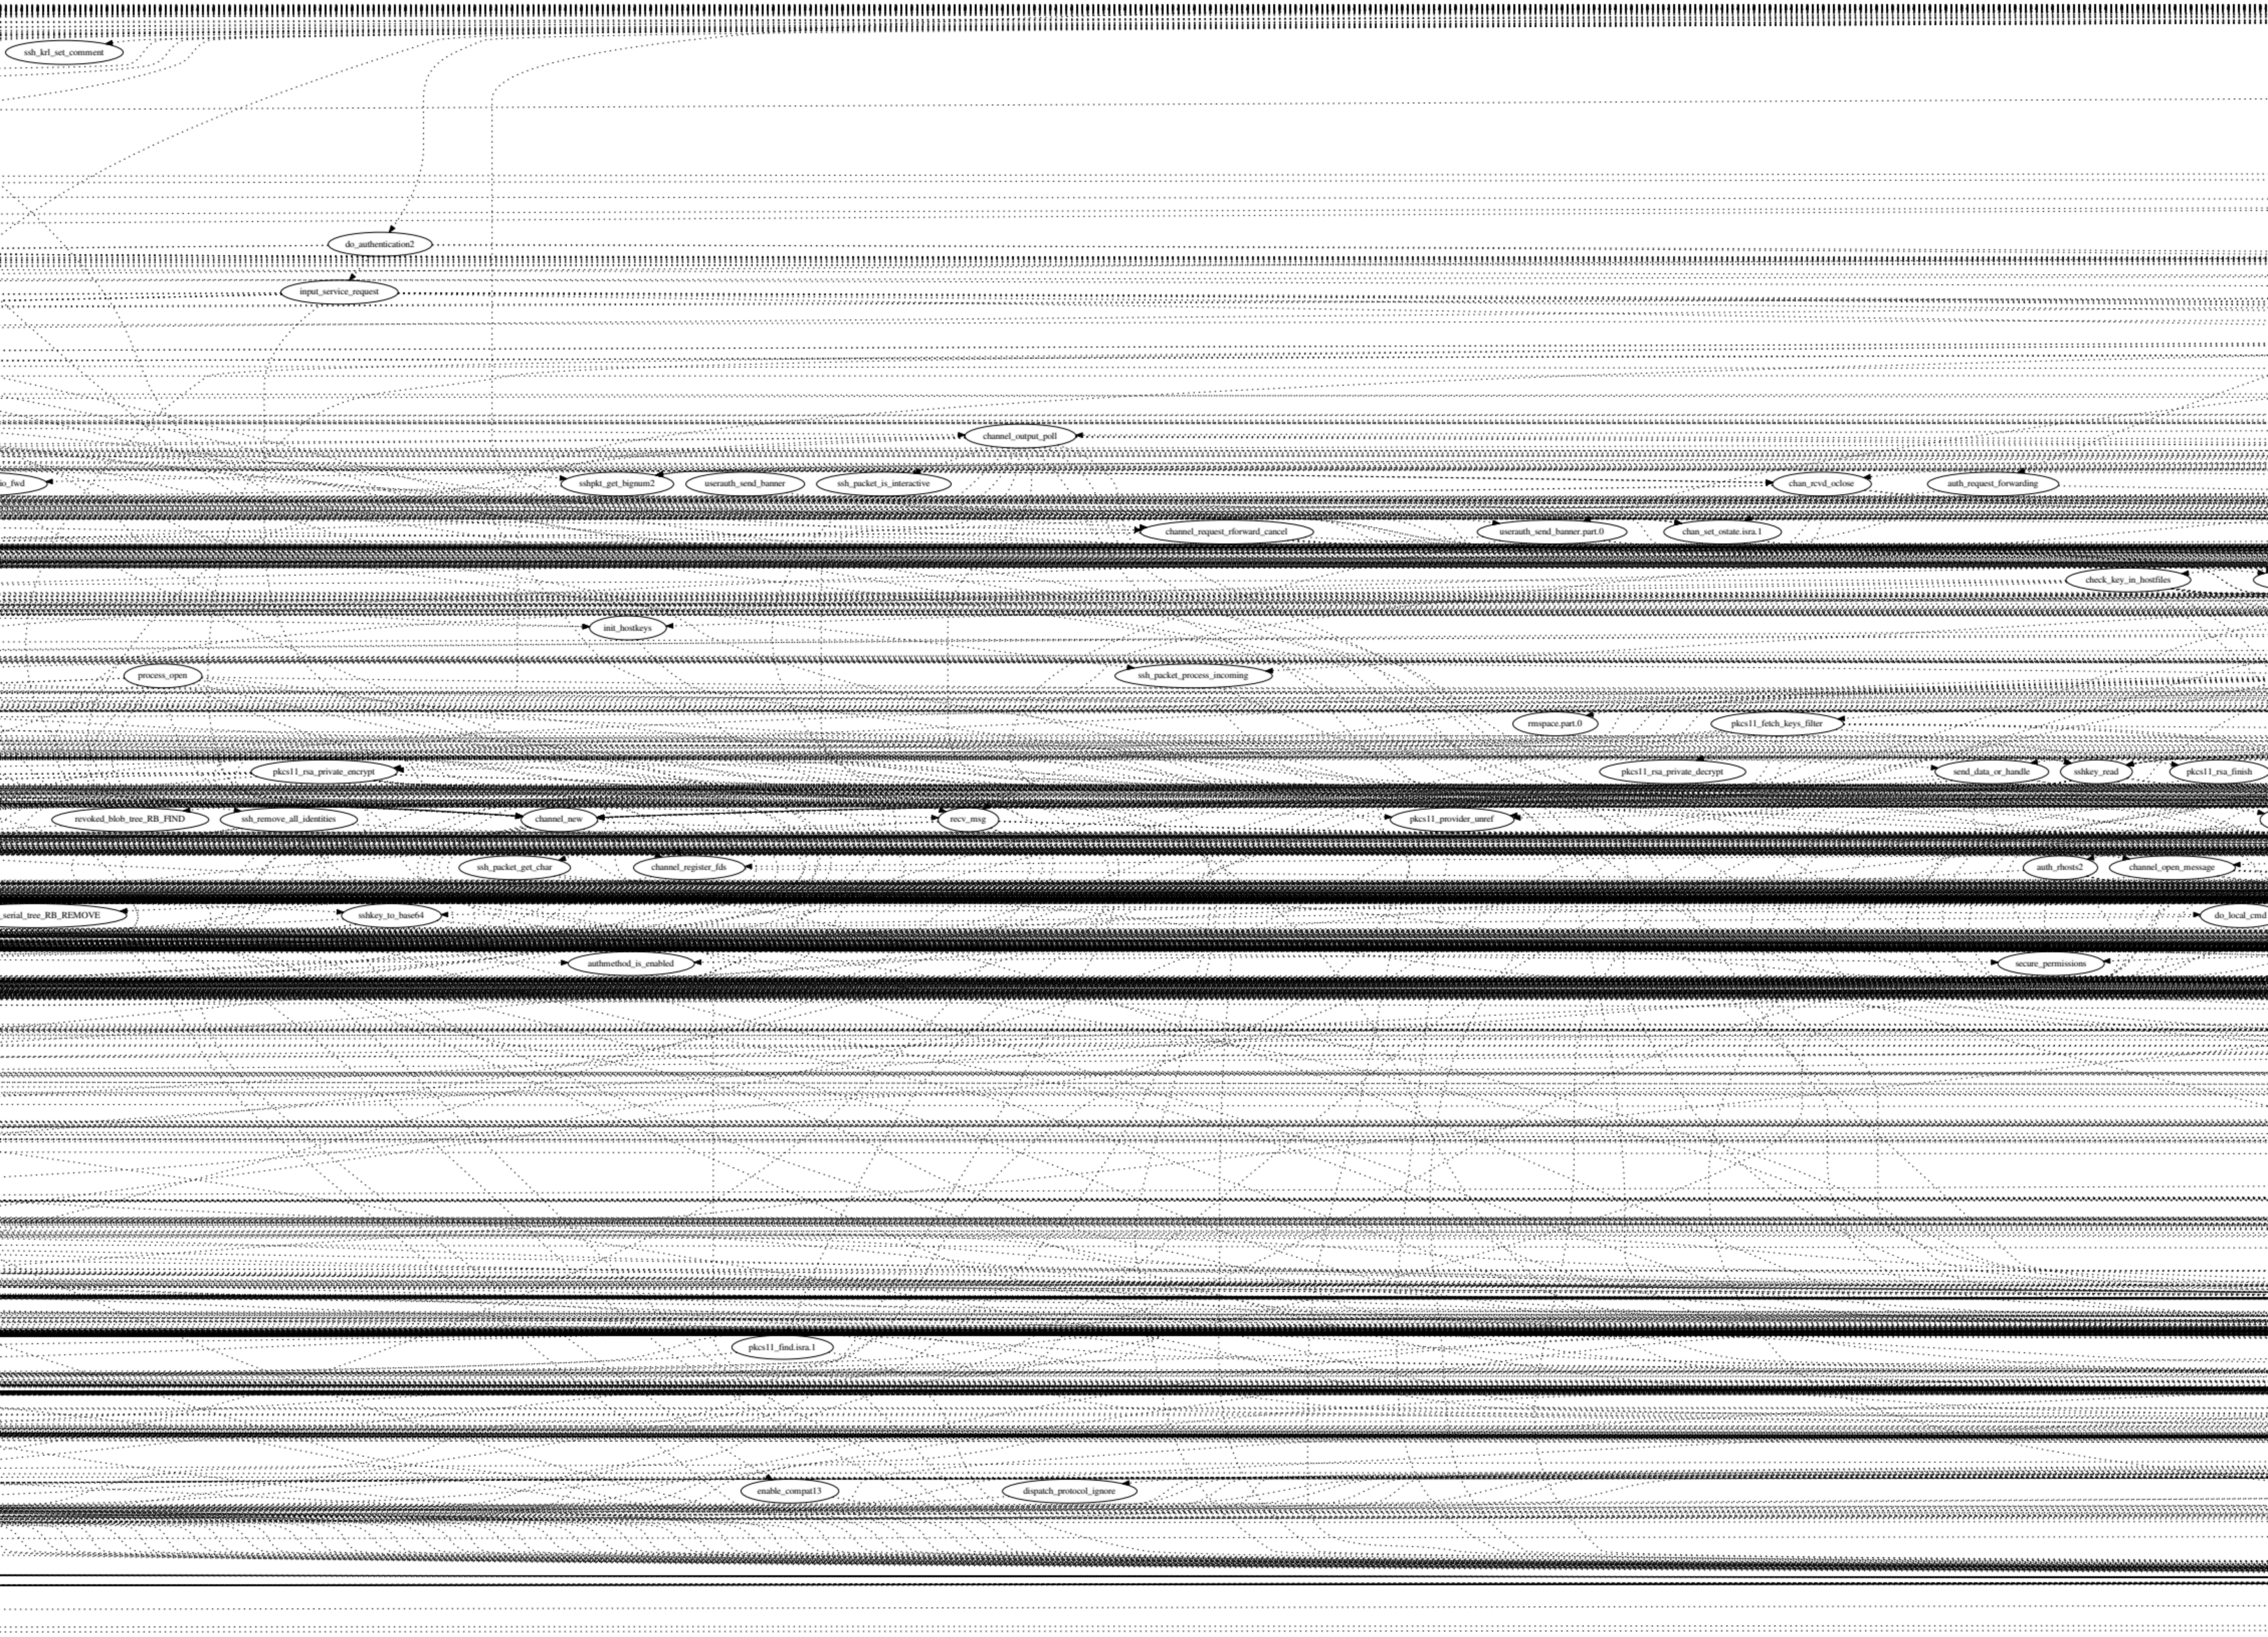
ssh_krl_set_comment
do_authentication2
input_service_request
channel_output_poll
io_fwd
sshpkt_get_bignum2
userauth_send_banner
ssh_packet_is_interactive
chan_rcvd_oclose
auth_request_forwarding
channel_request_rforward_cancel
userauth_send_banner.part.0
chan_set_ostate.isra.1
check_key_in_hostfiles
init_hostkeys
process_open
ssh_packet_process_incoming
rmspace.part.0
pkcs11_fetch_keys_filter
pkcs11_rsa_private_encrypt
pkcs11_rsa_private_decrypt
send_data_or_handle
sshkey_read
pkcs11_rsa_finish
revoked_blob_tree_RB_FIND
ssh_remove_all_identities
channel_new
recv_msg
pkcs11_provider_unref
ssh_packet_get_char
channel_register_fds
auth_rhosts2
channel_open_message
serial_tree_RB_REMOVE
sshkey_to_base64
do_local_cmd
authmethod_is_enabled
secure_permissions
pkcs11_find.isra.1
enable_compat13
dispatch_protocol_ignore

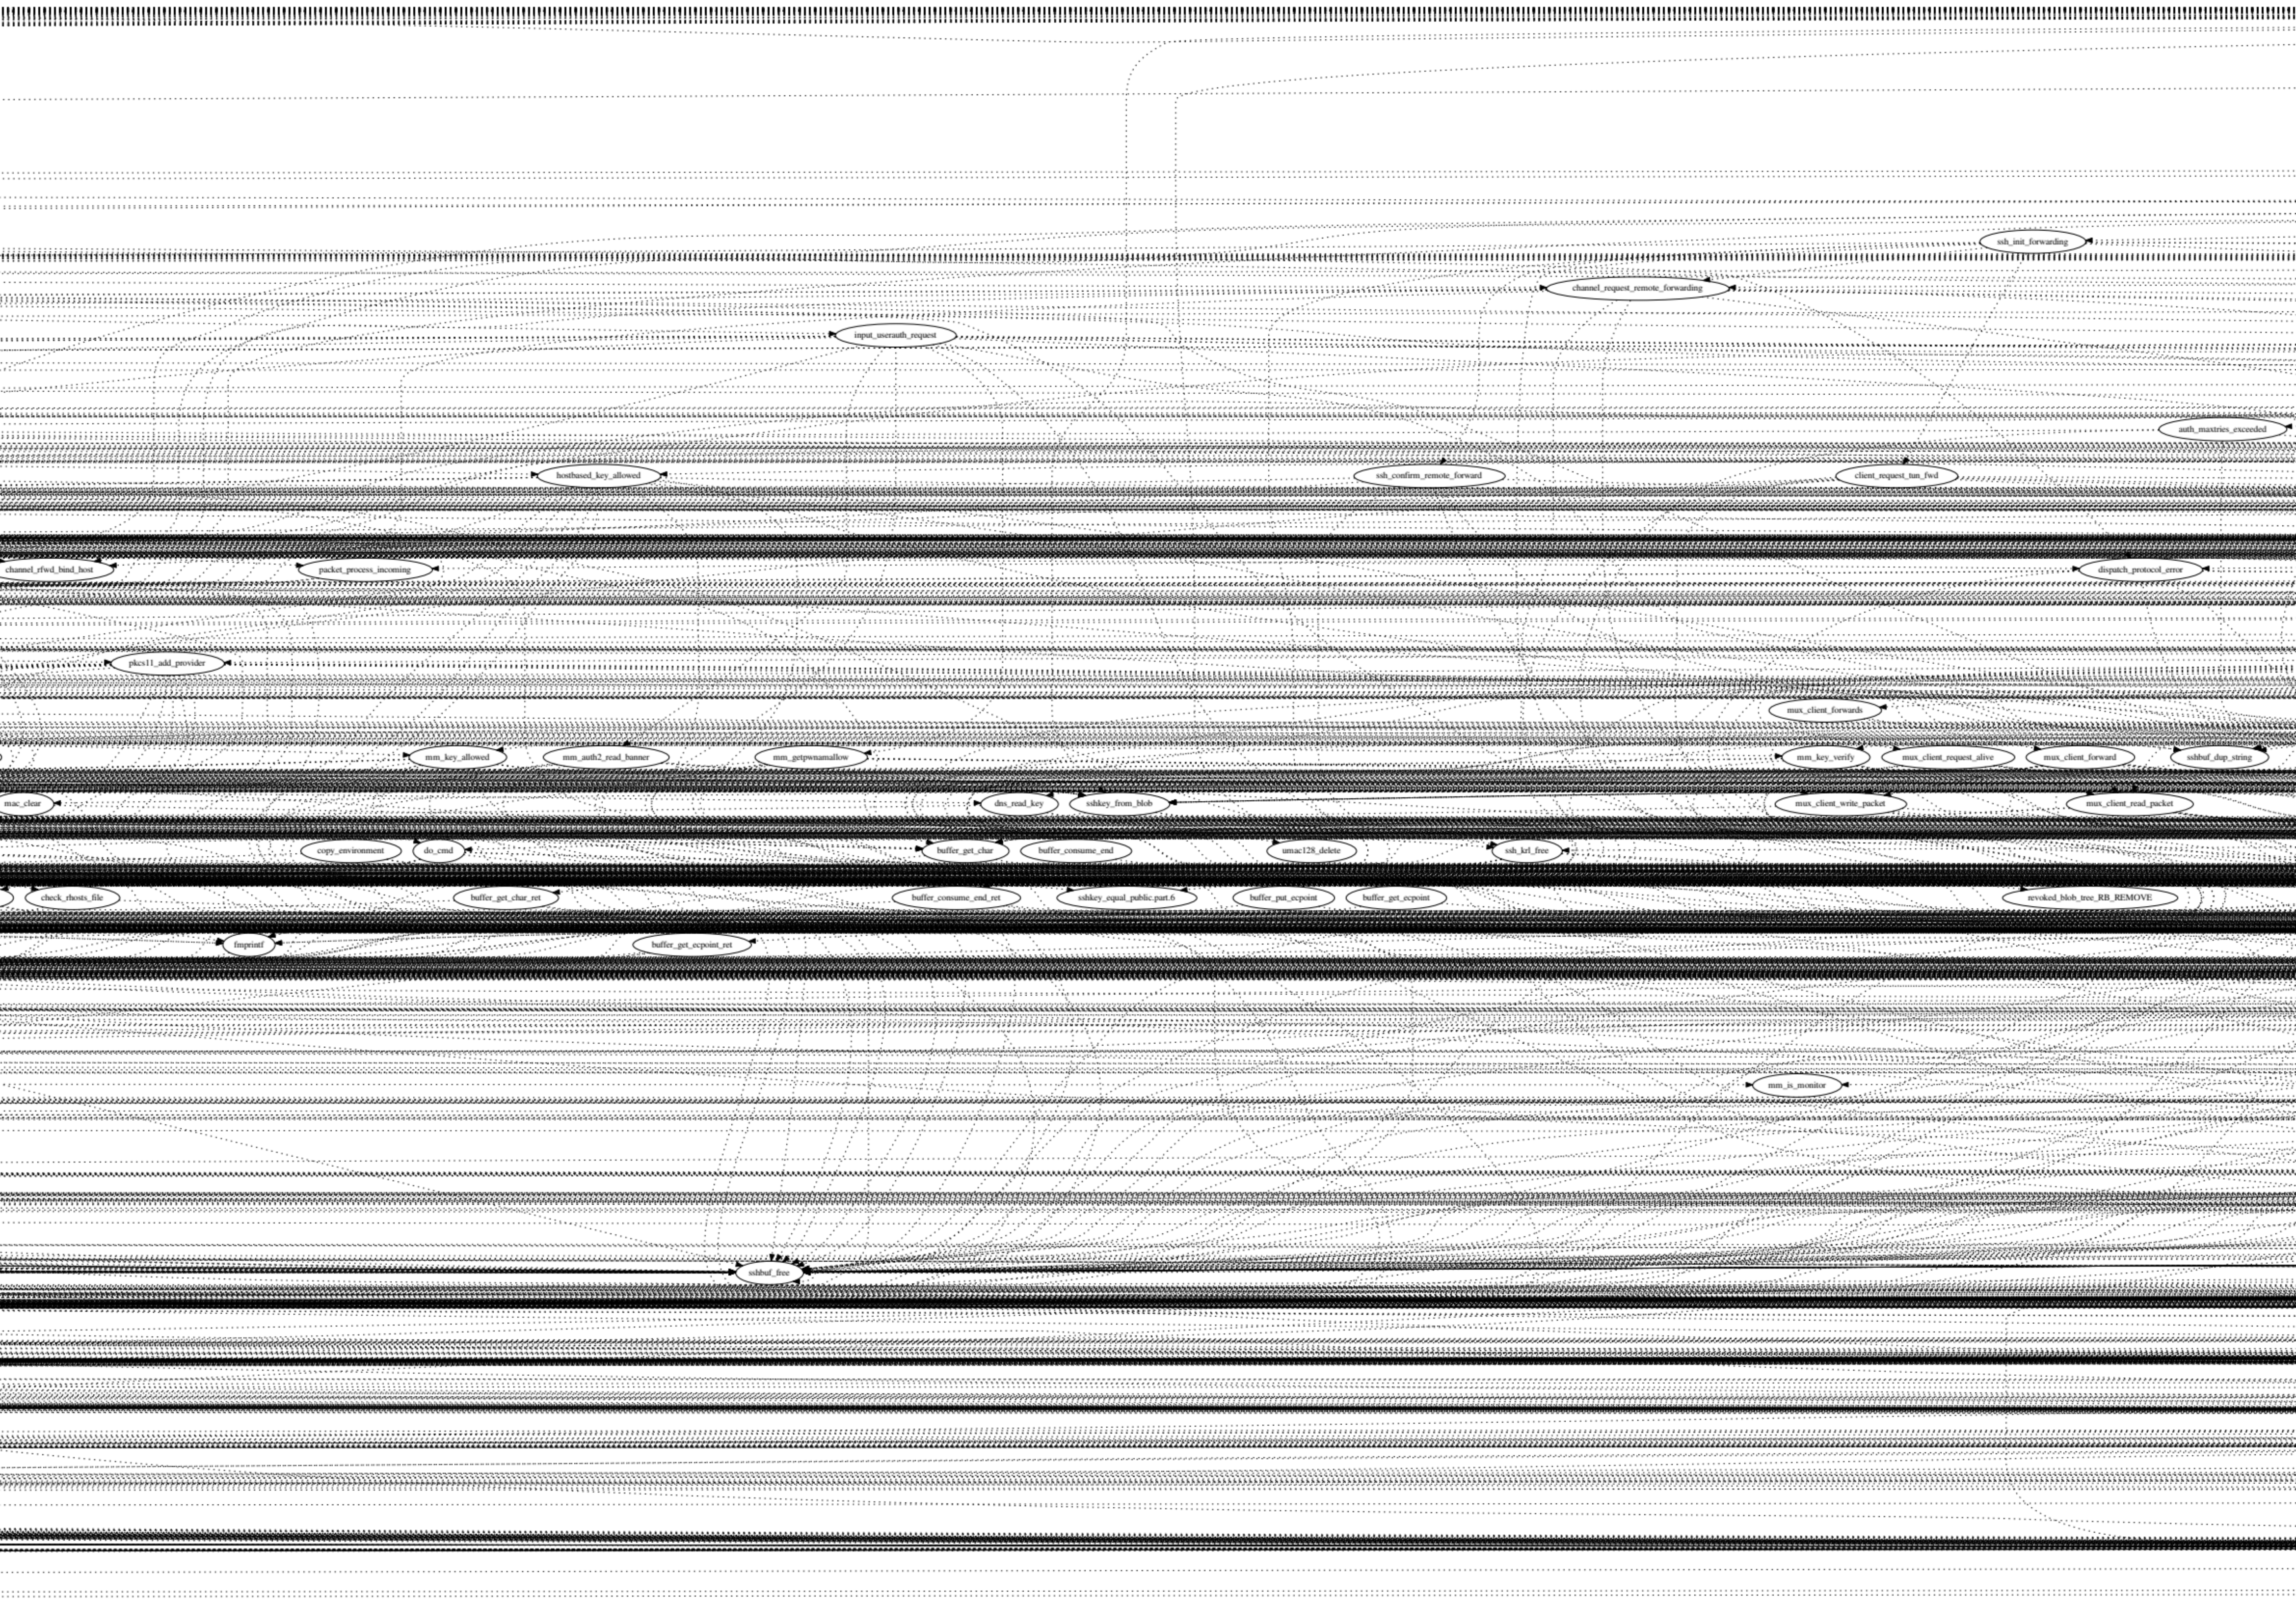
ssh_init_forwarding
channel_request_remote_forwarding
input_userauth_request
auth_maxtries_exceeded
hostbased_key_allowed
ssh_confirm_remote_forward
client_request_tun_fwd
channel_rfwd_bind_host
packet_process_incoming
dispatch_protocol_error
pkcs11_add_provider
mux_client_forwards
mm_key_allowed
mm_auth2_read_banner
mm_getpwnamallow
mm_key_verify
mux_client_request_alive
mux_client_forward
sshbuf_dup_string
mac_clear
dns_read_key
sshkey_from_blob
mux_client_write_packet
mux_client_read_packet
copy_environment
do_cmd
buffer_get_char
buffer_consume_end
umac128_delete
ssh_krl_free
check_rhosts_file
buffer_get_char_ret
buffer_consume_end_ret
sshkey_equal_public.part.6
buffer_put_ecpoint
buffer_get_ecpoint
revoked_blob_tree_RB_REMOVE
fmprintf
buffer_get_ecpoint_ret
mm_is_monitor
sshbuf_free

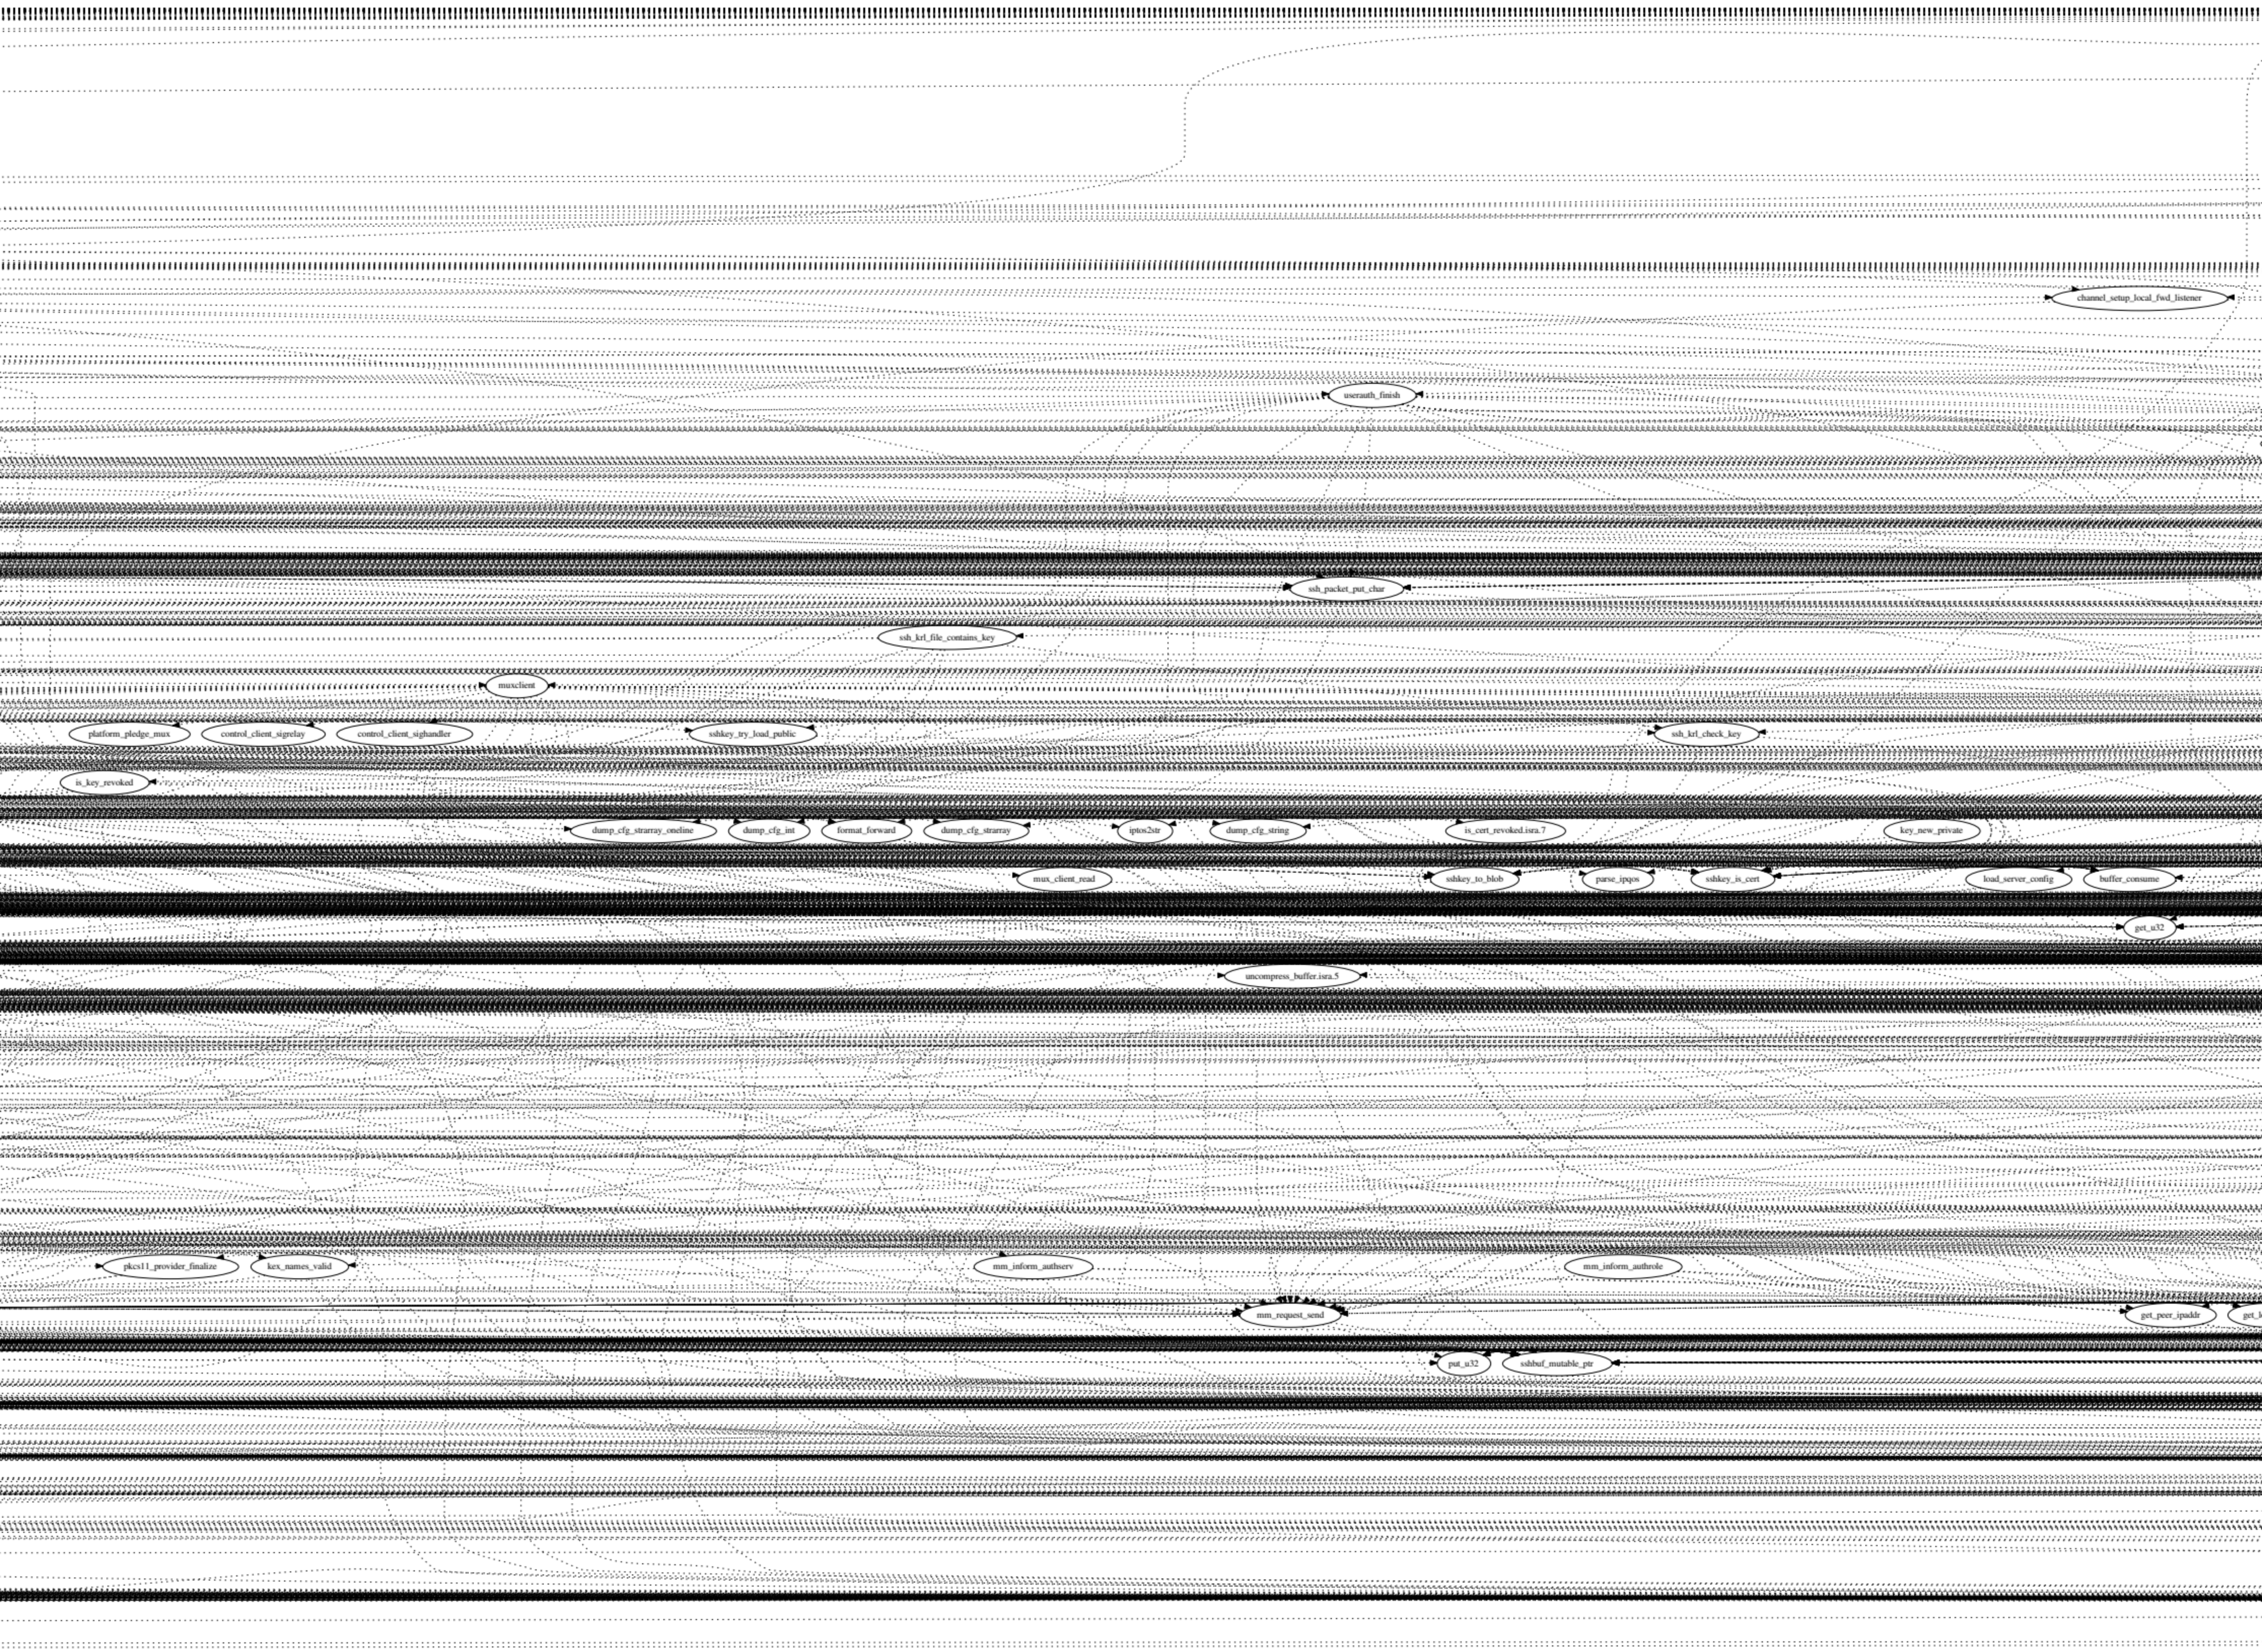
channel_setup_local_fwd_listener
userauth_finish
ssh_packet_put_char
ssh_krl_file_contains_key
muxclient
platform_pledge_mux
control_client_sigrelay
control_client_sighandler
sshkey_try_load_public
ssh_krl_check_key
is_key_revoked
dump_cfg_strarray_oneline
dump_cfg_int
format_forward
dump_cfg_strarray
iptos2str
dump_cfg_string
is_cert_revoked.isra.7
key_new_private
mux_client_read
sshkey_to_blob
parse_ipqos
sshkey_is_cert
load_server_config
buffer_consume
get_u32
uncompress_buffer.isra.5
pkcs11_provider_finalize
kex_names_valid
mm_inform_authserv
mm_inform_authrole
mm_request_send
get_peer_ipaddr
get_l
put_u32
sshbuf_mutable_ptr

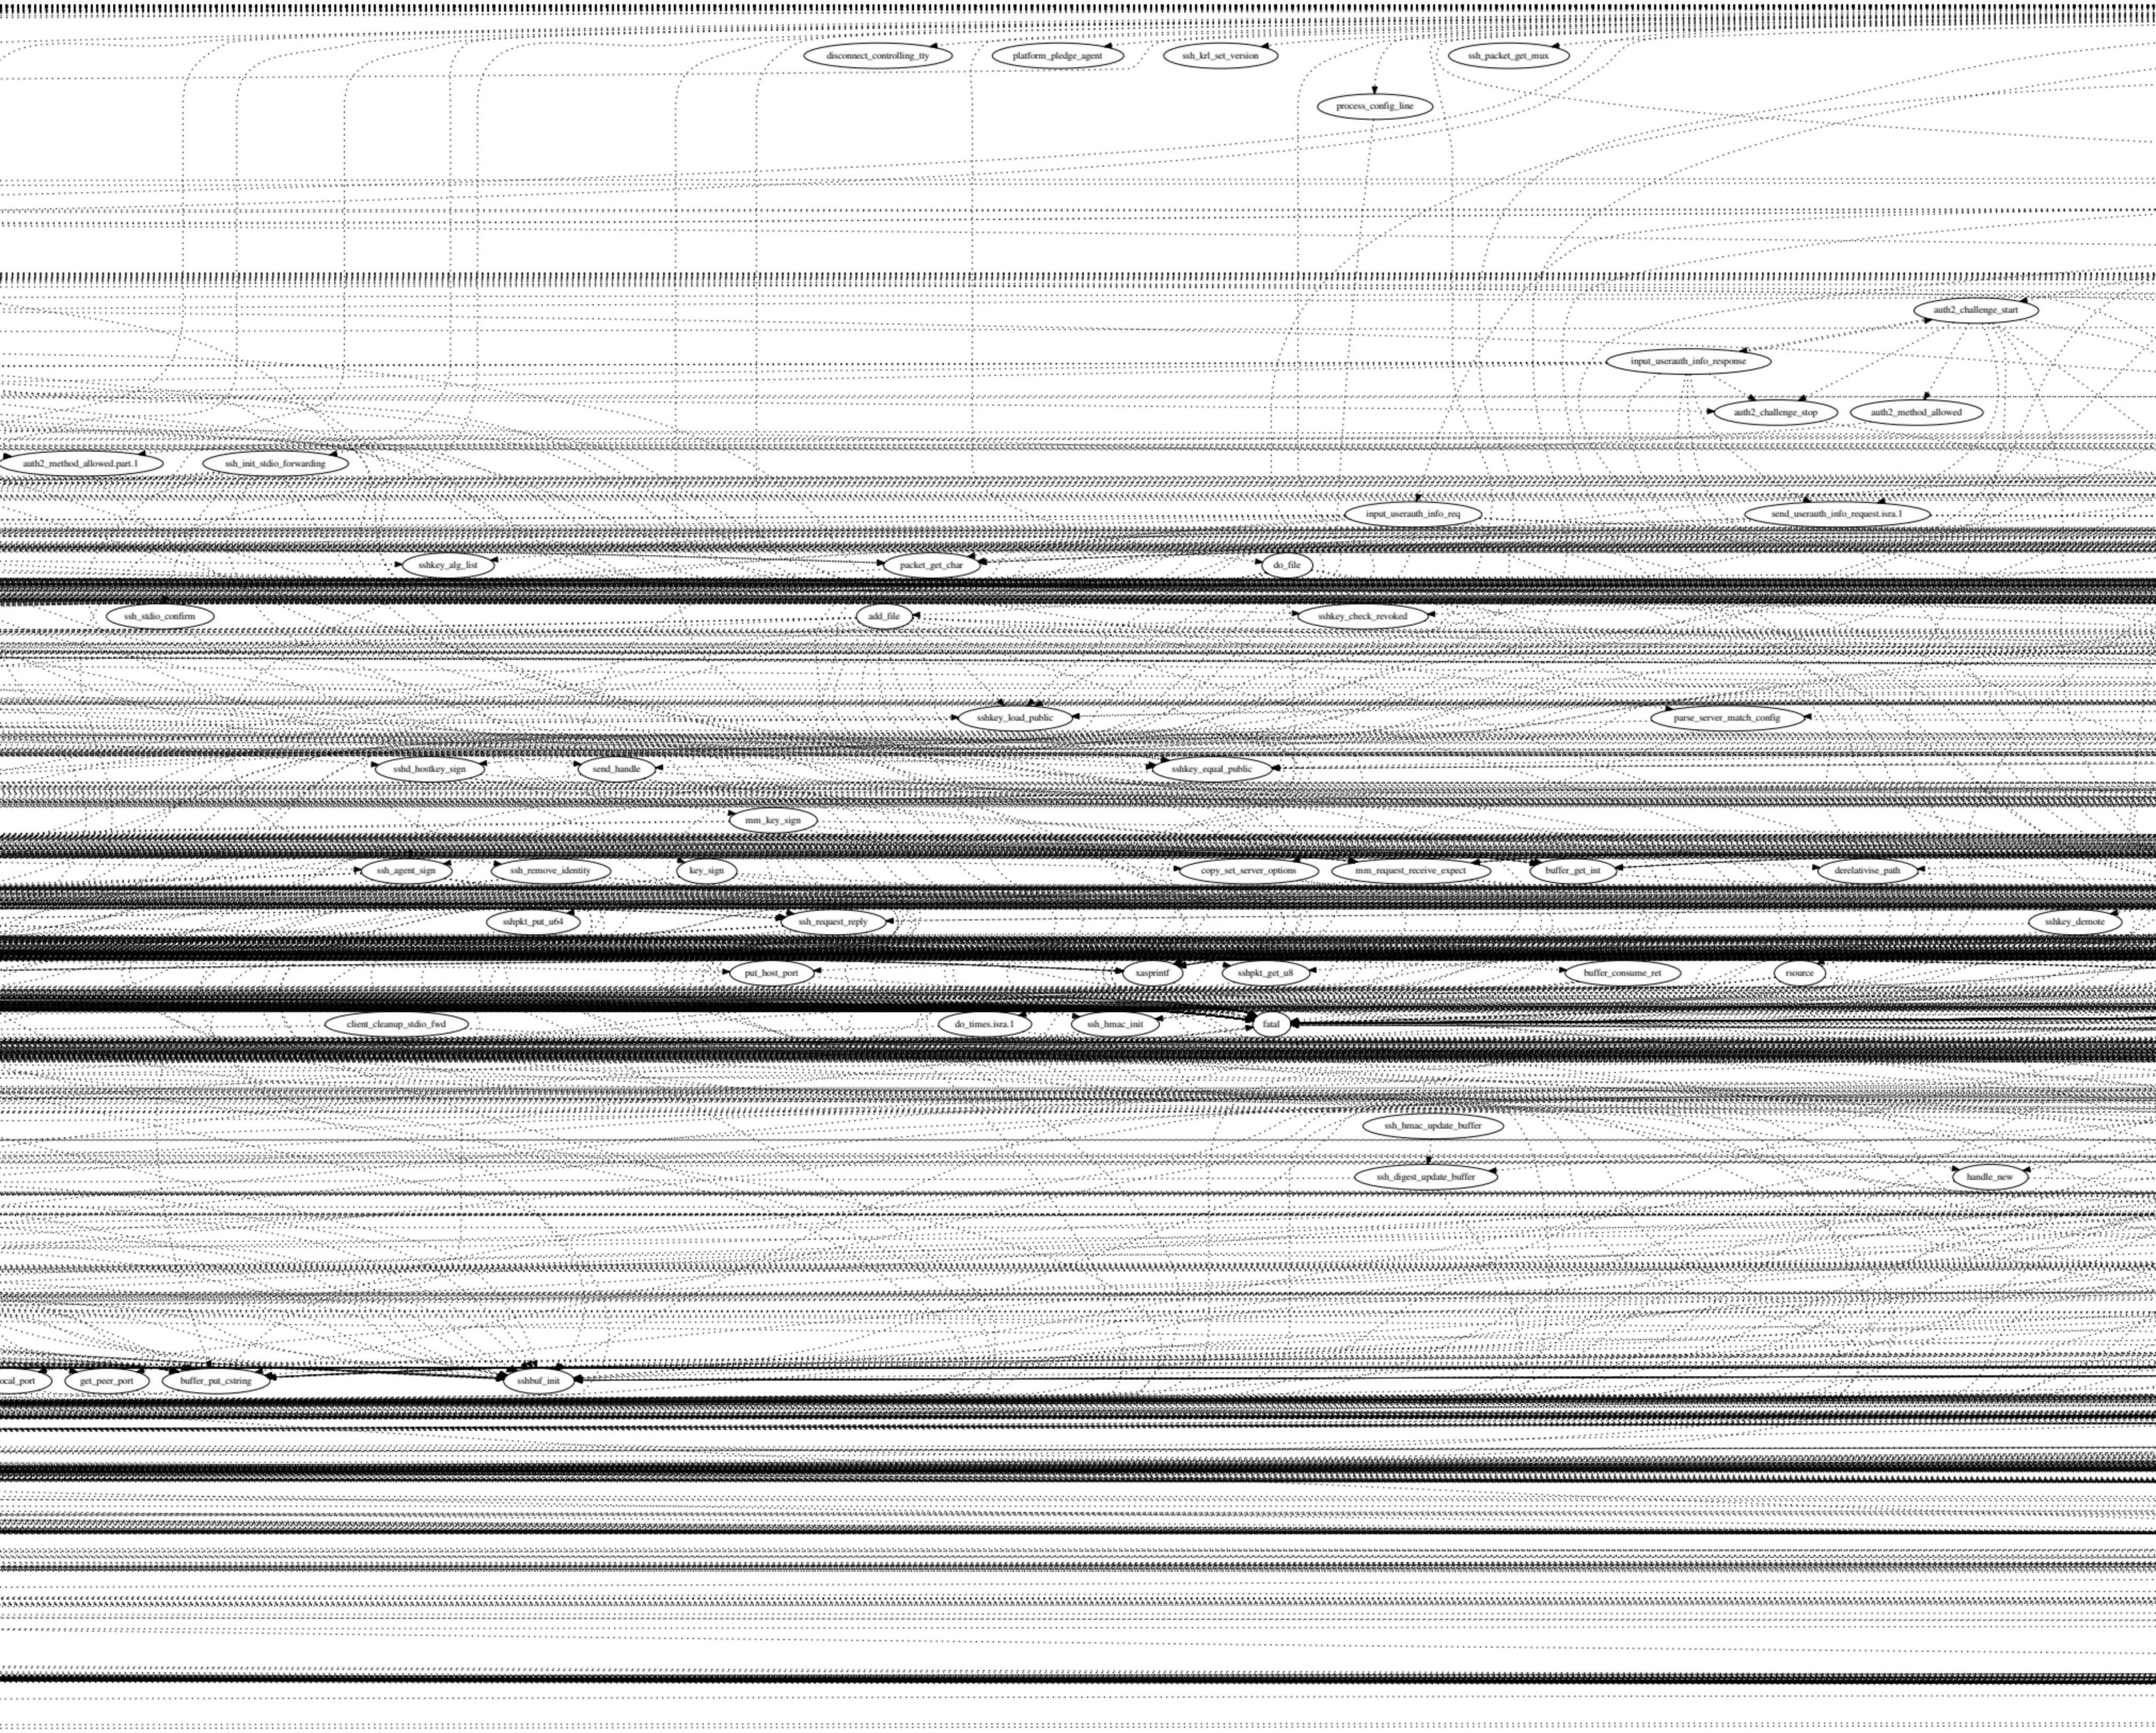
disconnect_controlling_tty
platform_pledge_agent
ssh_krl_set_version
ssh_packet_get_mux
process_config_line
auth2_challenge_start
input_userauth_info_response
auth2_challenge_stop
auth2_method_allowed
auth2_method_allowed.part.1
ssh_init_stdio_forwarding
input_userauth_info_req
send_userauth_info_request.isra.1
sshkey_alg_list
packet_get_char
do_file
ssh_stdio_confirm
add_file
sshkey_check_revoked
sshkey_load_public
parse_server_match_config
sshd_hostkey_sign
send_handle
sshkey_equal_public
mm_key_sign
ssh_agent_sign
ssh_remove_identity
key_sign
copy_set_server_options
mm_request_receive_expect
buffer_get_int
derelativise_path
sshpkt_put_u64
ssh_request_reply
sshkey_demote
put_host_port
xasprintf
sshpkt_get_u8
buffer_consume_ret
rsource
client_cleanup_stdio_fwd
do_times.isra.1
ssh_hmac_init
fatal
ssh_hmac_update_buffer
ssh_digest_update_buffer
handle_new
ocal_port
get_peer_port
buffer_put_cstring
sshbuf_init

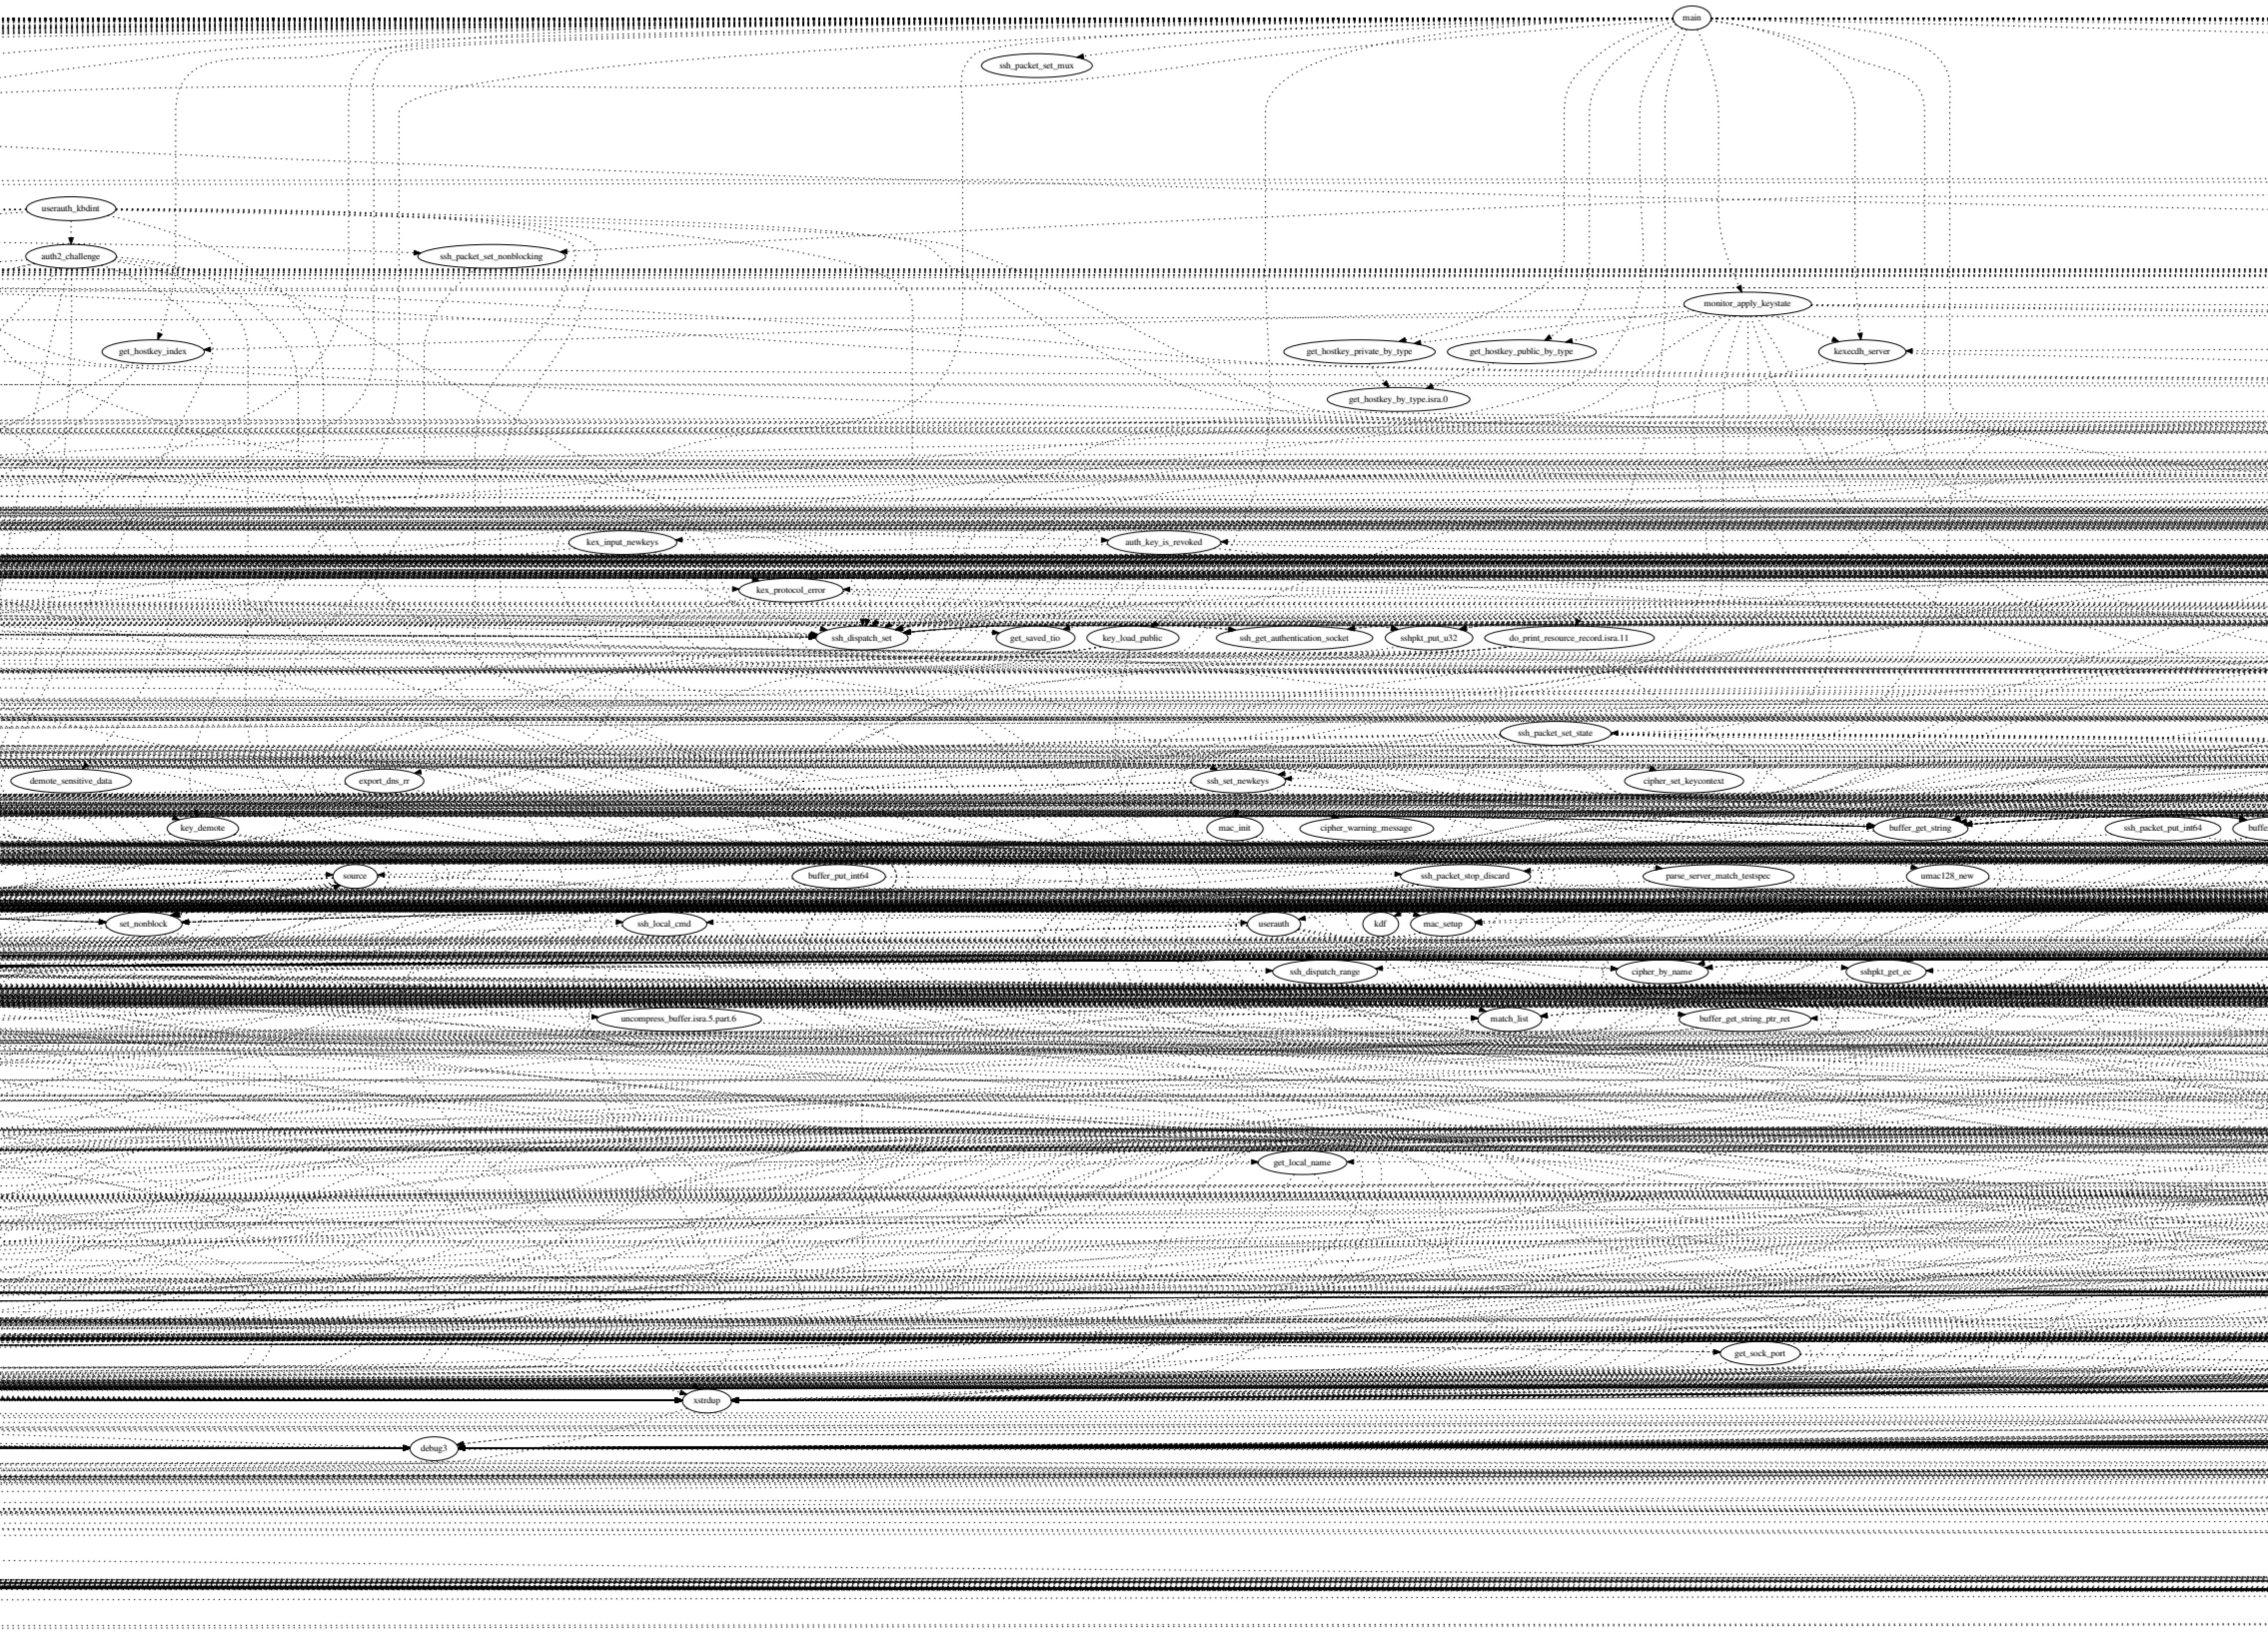
main
ssh_packet_set_mux
userauth_kbdint
auth2_challenge
ssh_packet_set_nonblocking
monitor_apply_keystate
get_hostkey_index
get_hostkey_private_by_type
get_hostkey_public_by_type
kexecdh_server
get_hostkey_by_type.isra.0
kex_input_newkeys
auth_key_is_revoked
kex_protocol_error
ssh_dispatch_set
get_saved_tio
key_load_public
ssh_get_authentication_socket
sshpkt_put_u32
do_print_resource_record.isra.11
ssh_packet_set_state
demote_sensitive_data
export_dns_rr
ssh_set_newkeys
cipher_set_keycontext
key_demote
mac_init
cipher_warning_message
buffer_get_string
ssh_packet_put_int64
buffe
source
buffer_put_int64
ssh_packet_stop_discard
parse_server_match_testspec
umac128_new
set_nonblock
ssh_local_cmd
userauth
kdf
mac_setup
ssh_dispatch_range
cipher_by_name
sshpkt_get_ec
uncompress_buffer.isra.5.part.6
match_list
buffer_get_string_ptr_ret
get_local_name
get_sock_port
xstrdup
debug3

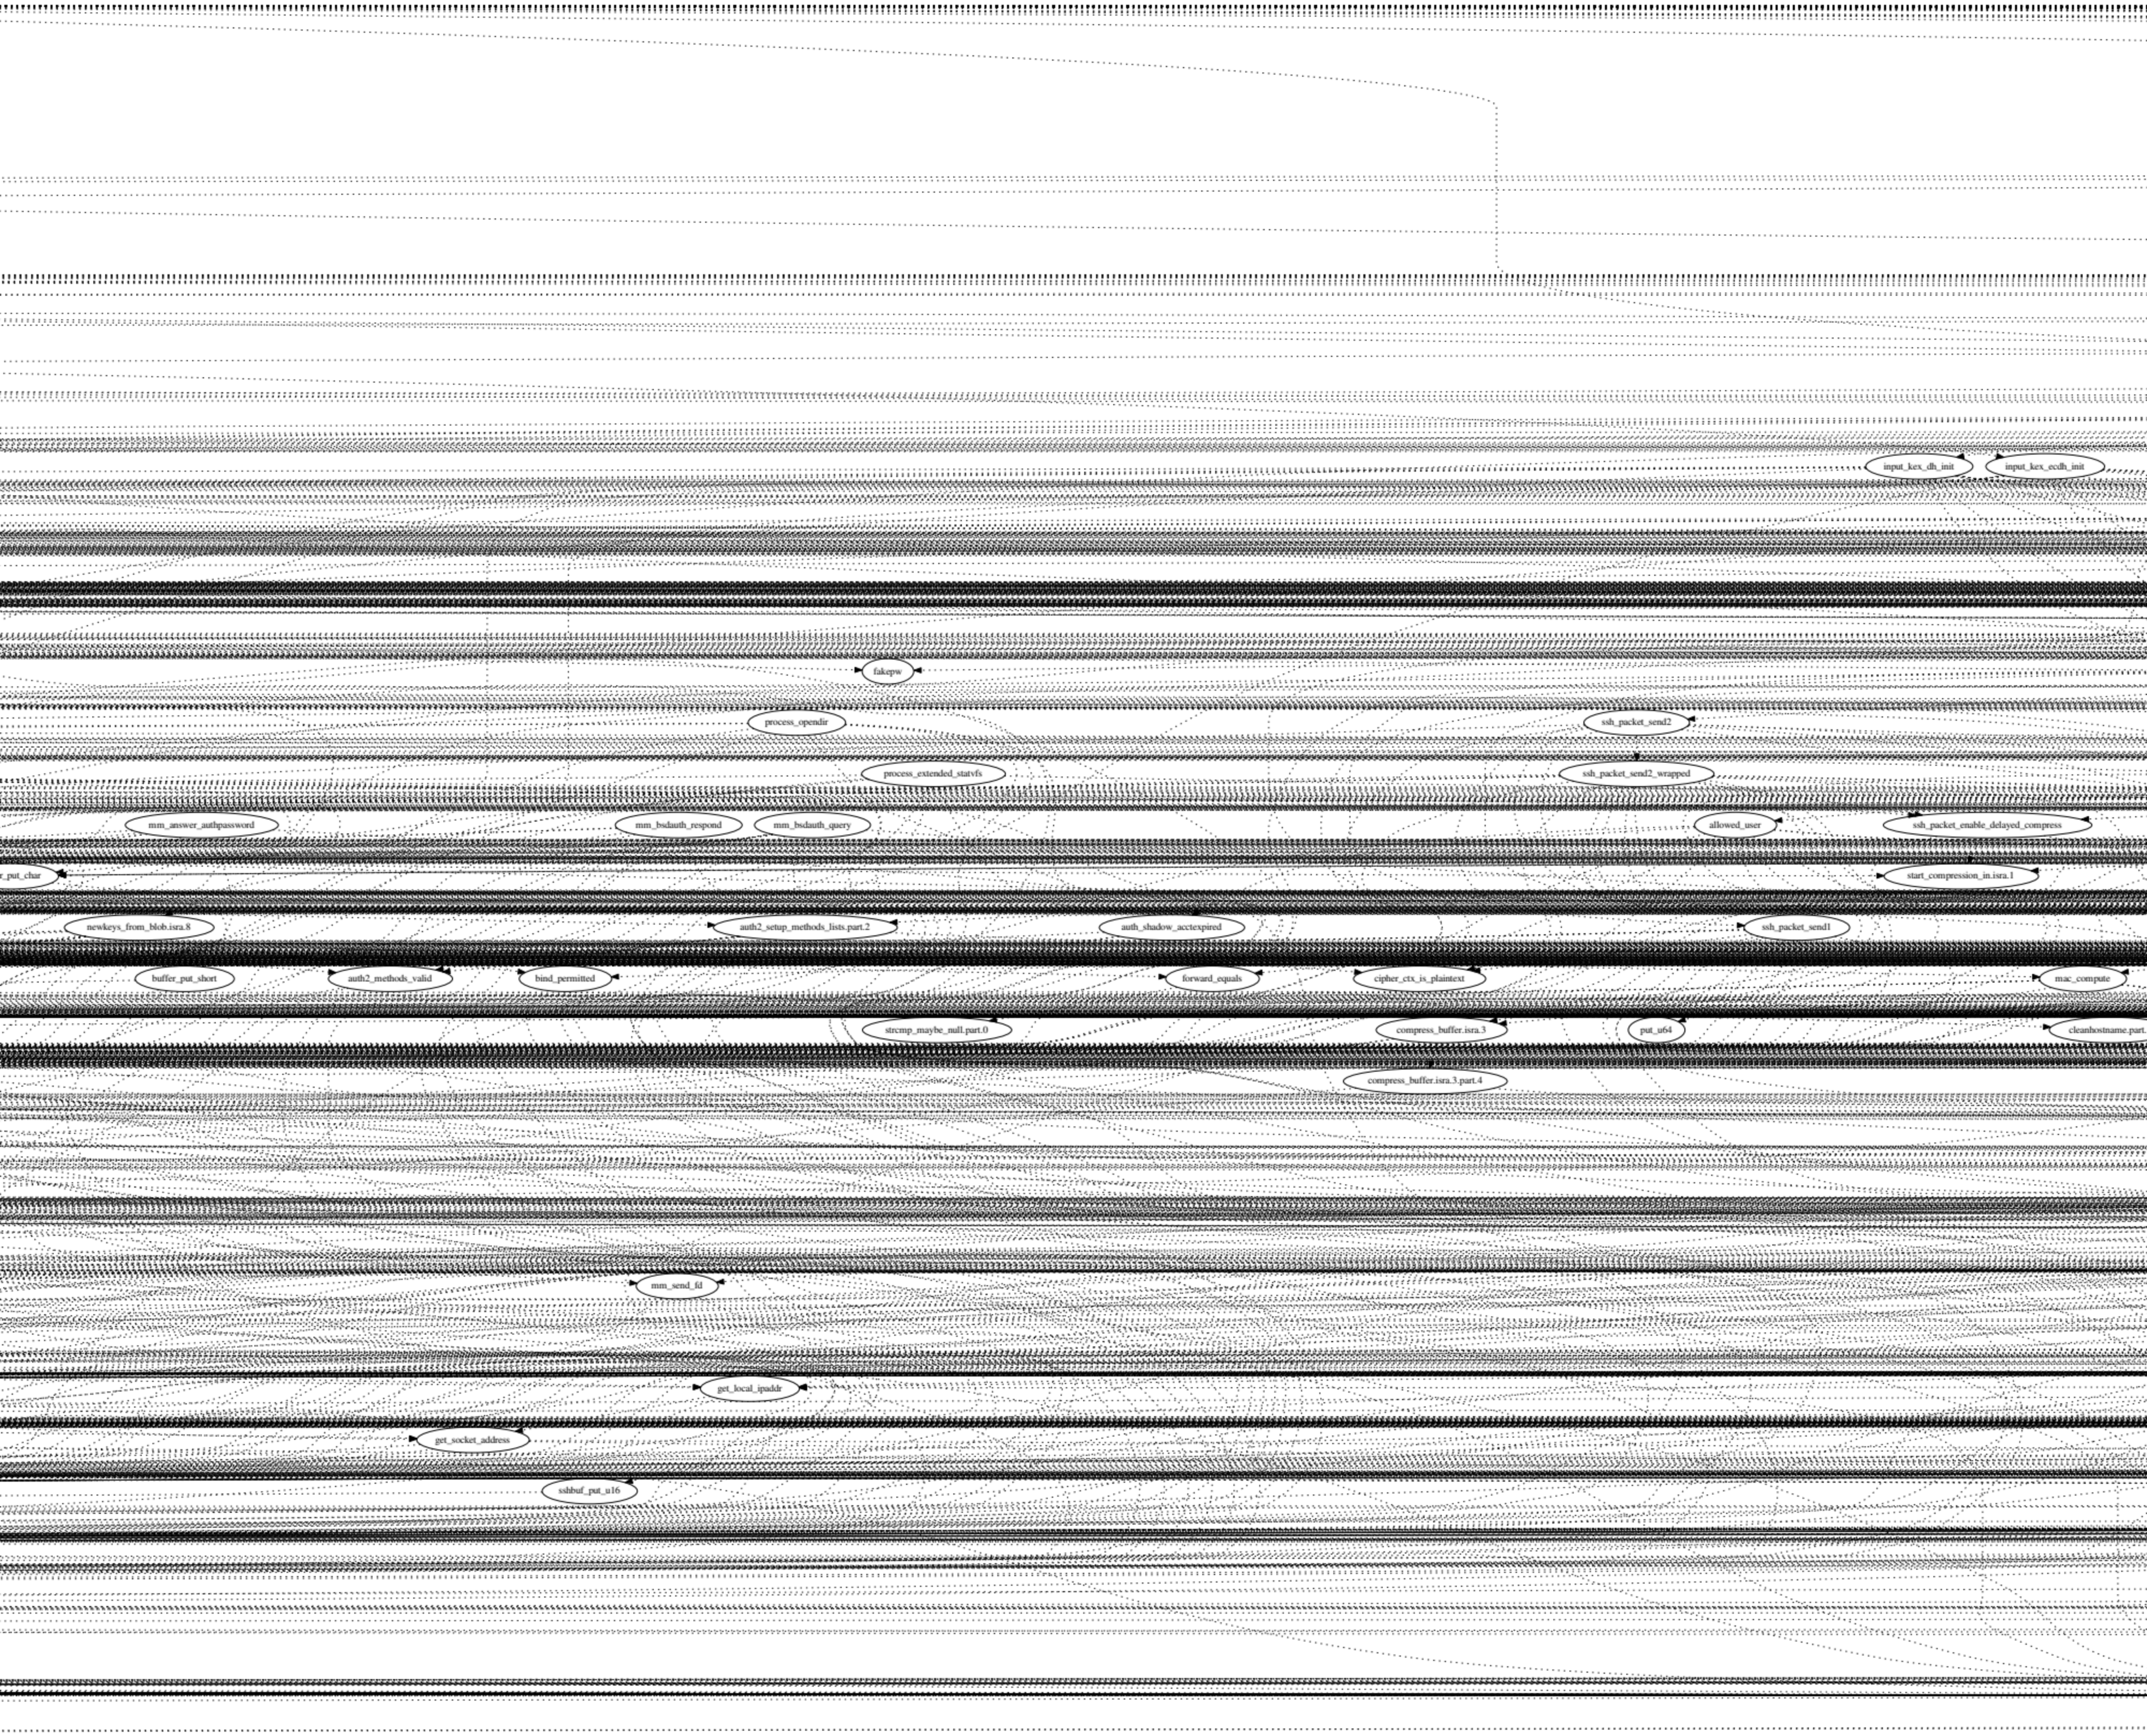
input_kex_dh_init
input_kex_ecdh_init
fakepw
process_opendir
ssh_packet_send2
process_extended_statvfs
ssh_packet_send2_wrapped
mm_answer_authpassword
mm_bsdauth_respond
mm_bsdauth_query
allowed_user
ssh_packet_enable_delayed_compress
r_put_char
start_compression_in.isra.1
newkeys_from_blob.isra.8
auth2_setup_methods_lists.part.2
auth_shadow_acctexpired
ssh_packet_send1
buffer_put_short
auth2_methods_valid
bind_permitted
forward_equals
cipher_ctx_is_plaintext
mac_compute
strcmp_maybe_null.part.0
compress_buffer.isra.3
put_u64
cleanhostname.part.
compress_buffer.isra.3.part.4
mm_send_fd
get_local_ipaddr
get_socket_address
sshbuf_put_u16

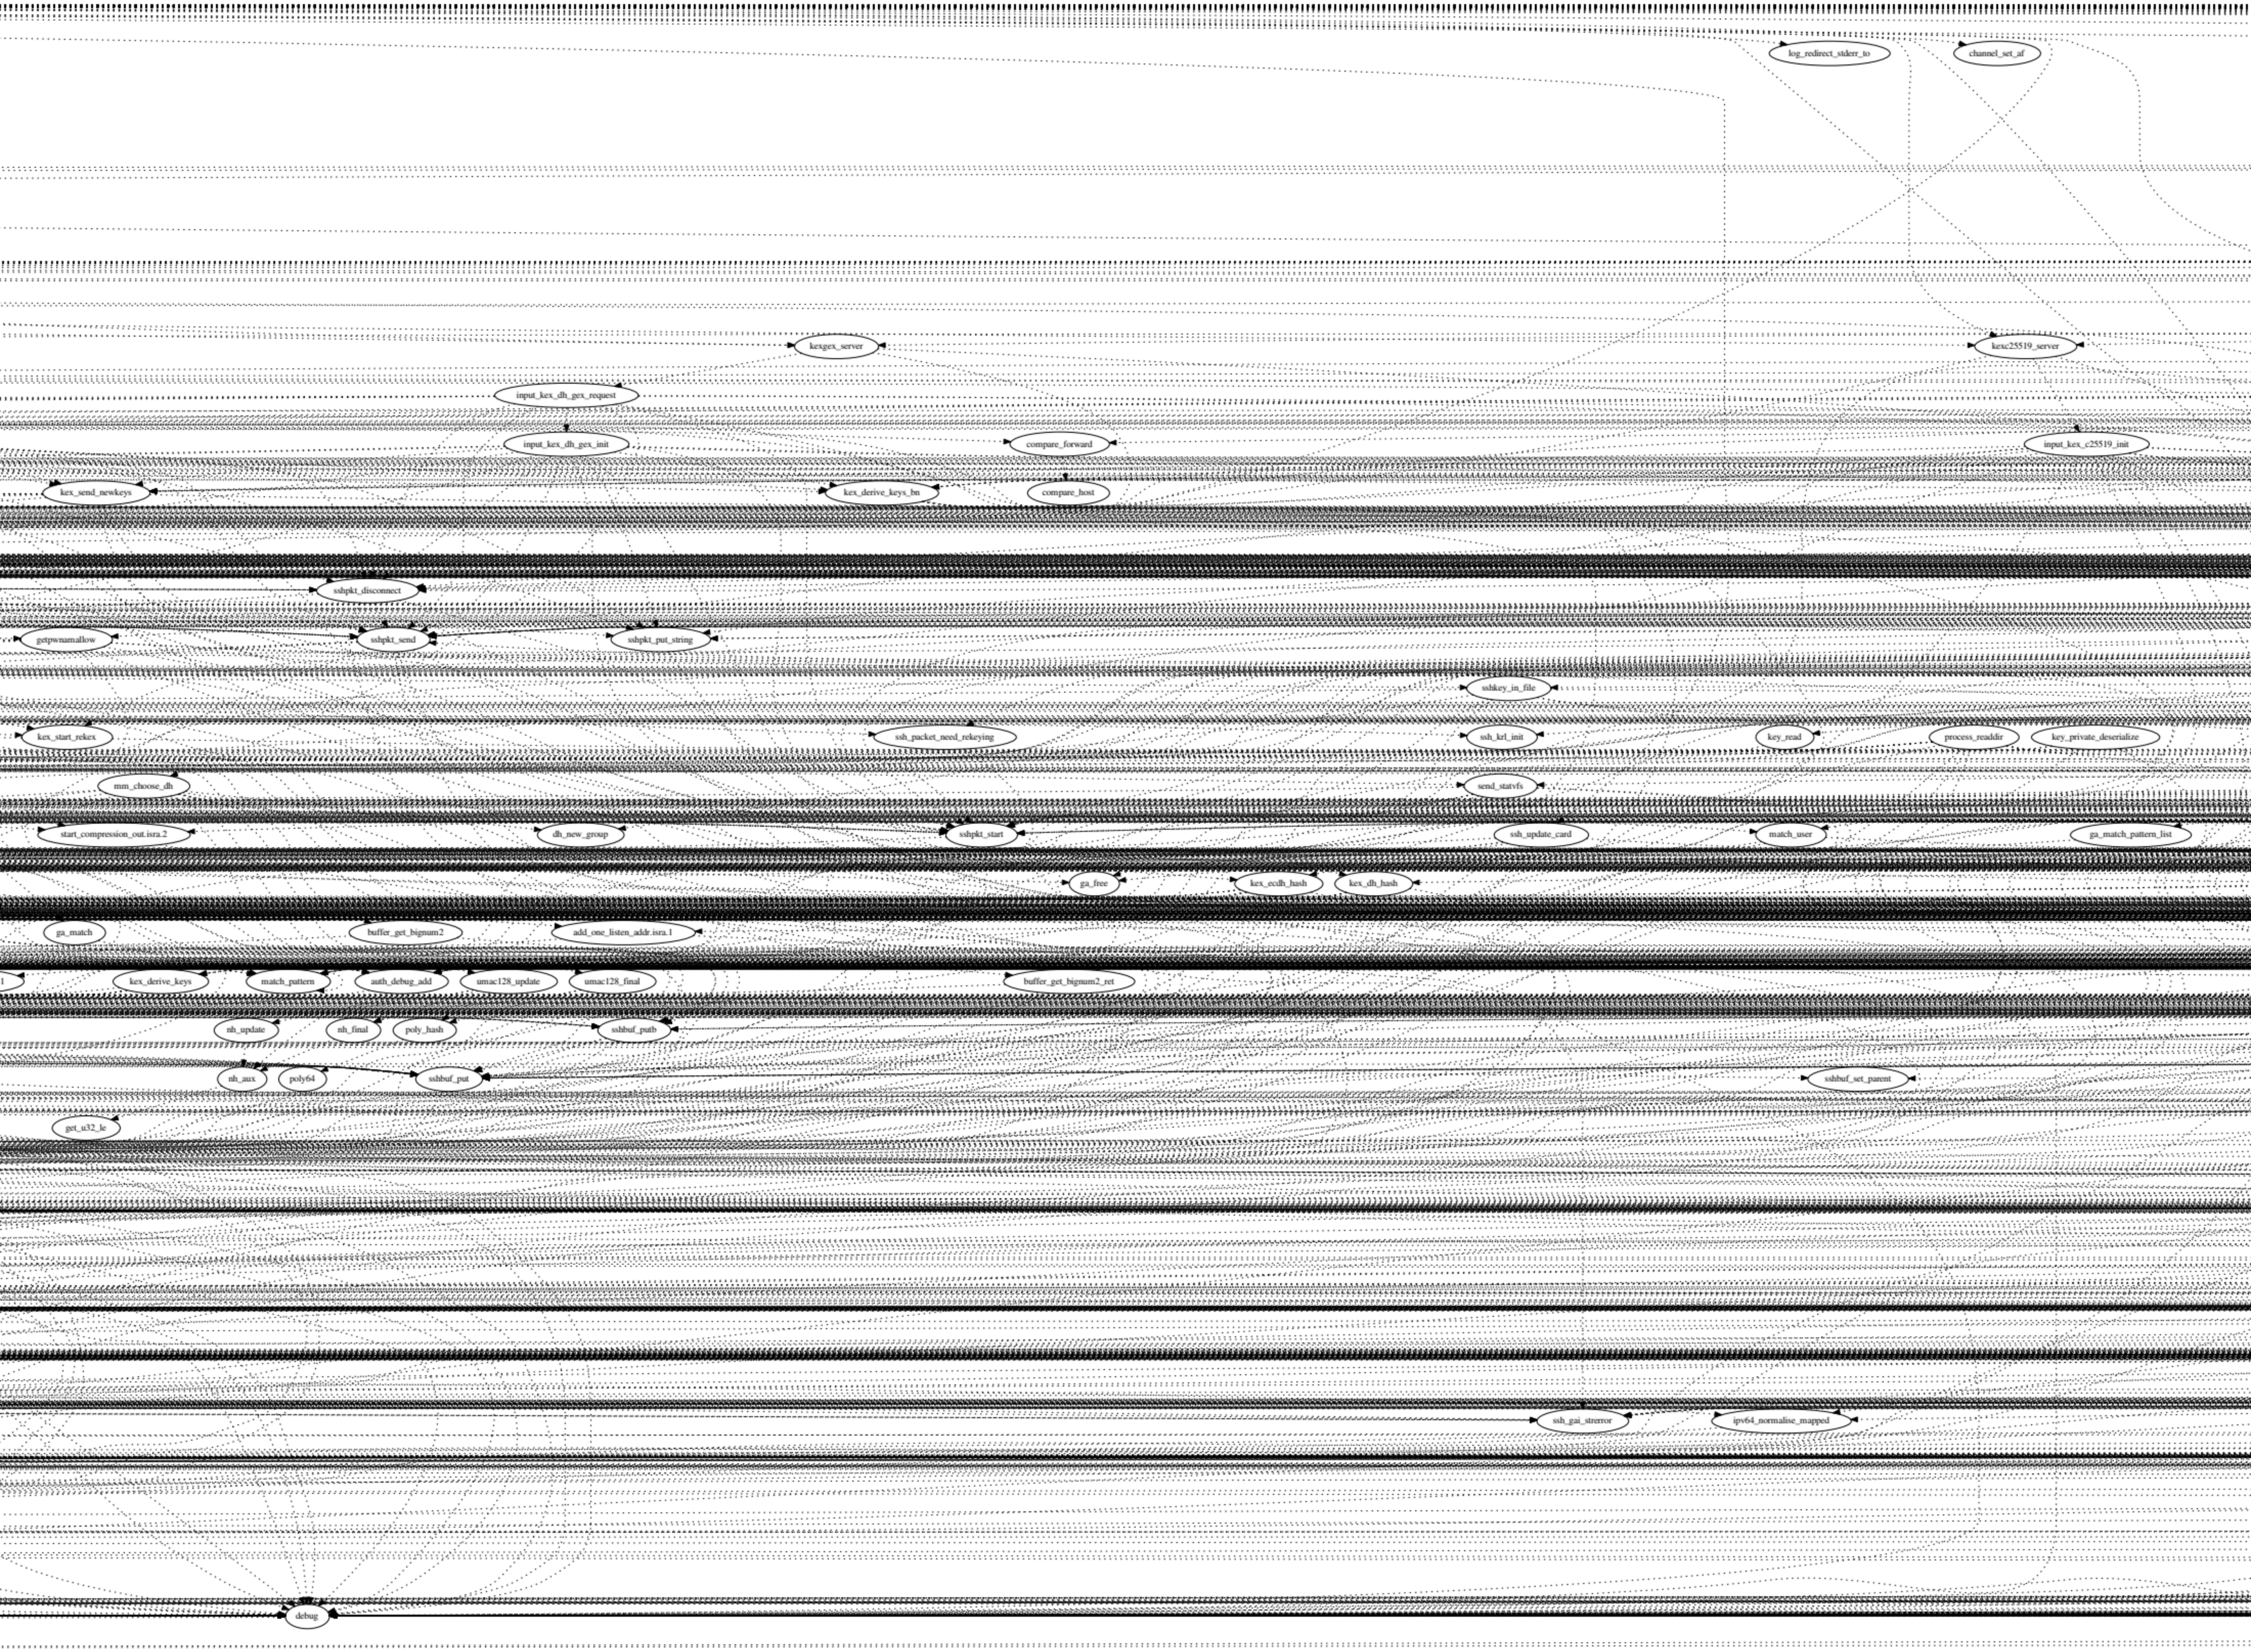
log_redirect_stderr_to
channel_set_af
kexgex_server
kexc25519_server
input_kex_dh_gex_request
input_kex_dh_gex_init
compare_forward
input_kex_c25519_init
kex_send_newkeys
kex_derive_keys_bn
compare_host
sshpkt_disconnect
getpwnamallow
sshpkt_send
sshpkt_put_string
sshkey_in_file
kex_start_rekex
ssh_packet_need_rekeying
ssh_krl_init
key_read
process_readdir
key_private_deserialize
mm_choose_dh
send_statvfs
start_compression_out.isra.2
dh_new_group
sshpkt_start
ssh_update_card
match_user
ga_match_pattern_list
ga_free
kex_ecdh_hash
kex_dh_hash
ga_match
buffer_get_bignum2
add_one_listen_addr.isra.1
kex_derive_keys
match_pattern
auth_debug_add
umac128_update
umac128_final
buffer_get_bignum2_ret
nh_update
nh_final
poly_hash
sshbuf_putb
nh_aux
poly64
sshbuf_put
sshbuf_set_parent
get_u32_le
ssh_gai_strerror
ipv64_normalise_mapped
debug

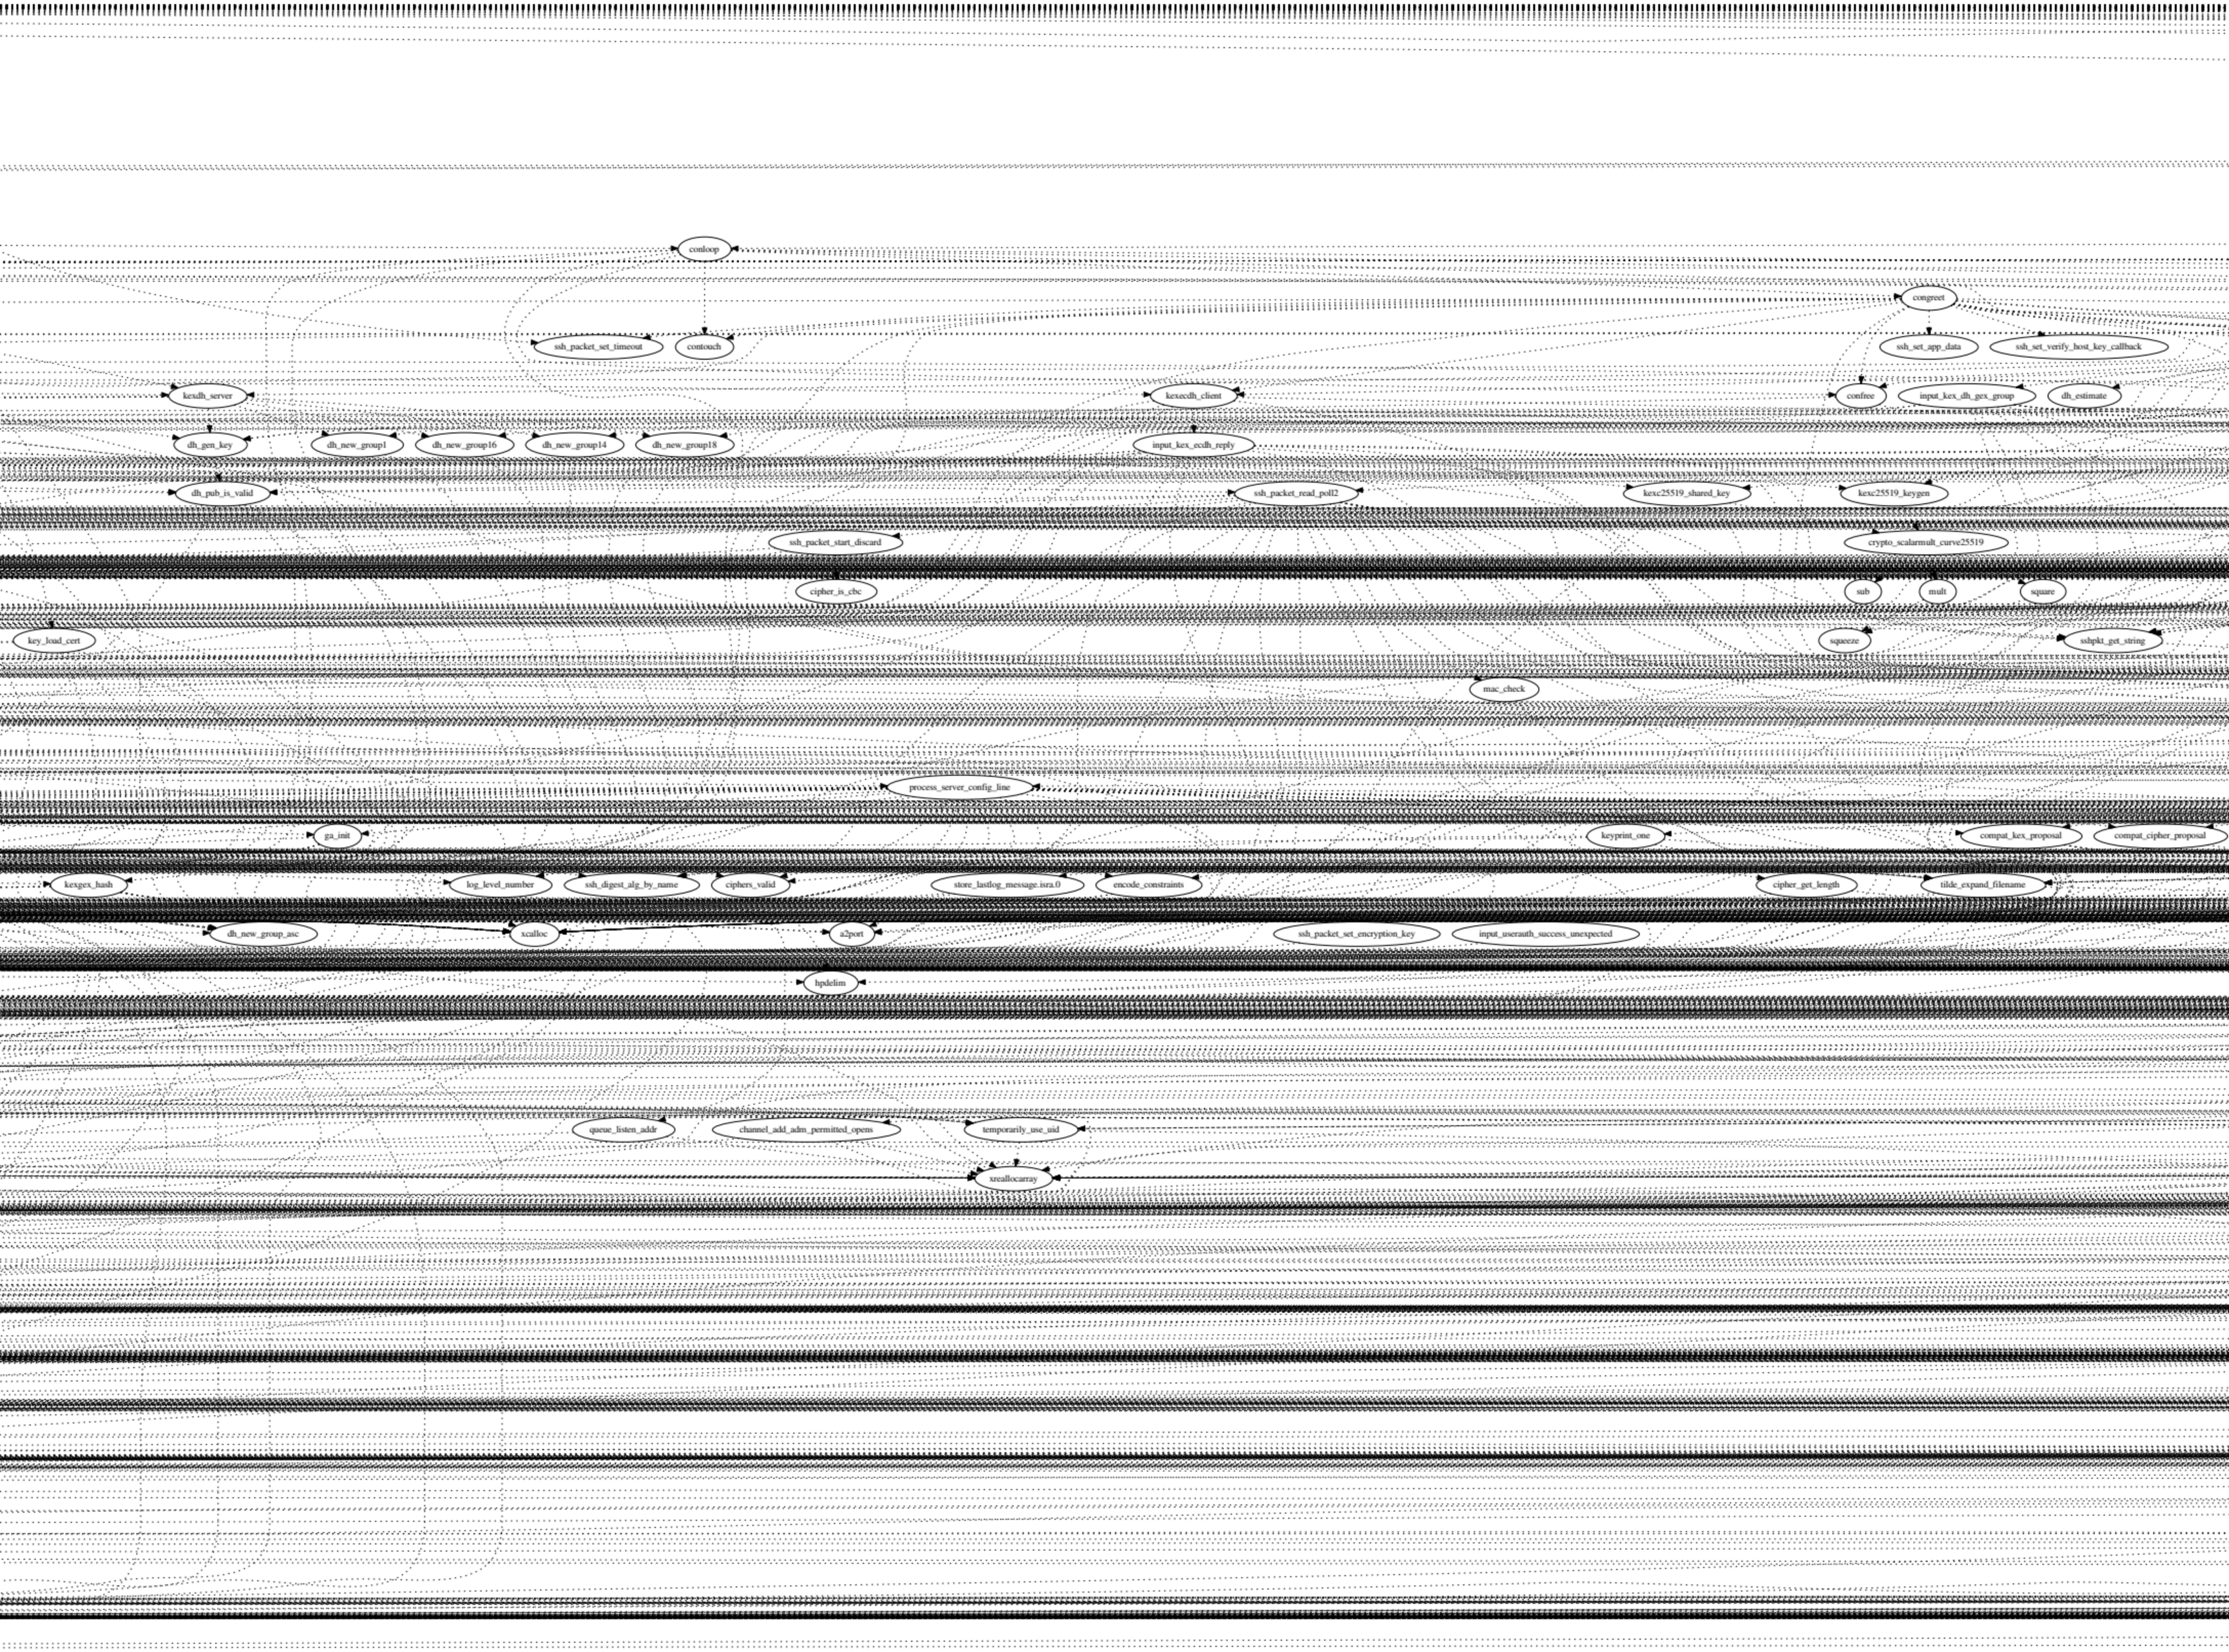
conloop
congreet
ssh_packet_set_timeout
contouch
ssh_set_app_data
ssh_set_verify_host_key_callback
kexdh_server
kexecdh_client
confree
input_kex_dh_gex_group
dh_estimate
dh_gen_key
dh_new_group1
dh_new_group16
dh_new_group14
dh_new_group18
input_kex_ecdh_reply
dh_pub_is_valid
ssh_packet_read_poll2
kexc25519_shared_key
kexc25519_keygen
ssh_packet_start_discard
crypto_scalarmult_curve25519
cipher_is_cbc
sub
mult
square
key_load_cert
squeeze
sshpkt_get_string
mac_check
process_server_config_line
ga_init
keyprint_one
compat_kex_proposal
compat_cipher_proposal
kexgex_hash
log_level_number
ssh_digest_alg_by_name
ciphers_valid
store_lastlog_message.isra.0
encode_constraints
cipher_get_length
tilde_expand_filename
dh_new_group_asc
xcalloc
a2port
ssh_packet_set_encryption_key
input_userauth_success_unexpected
hpdelim
queue_listen_addr
channel_add_adm_permitted_opens
temporarily_use_uid
xreallocarray

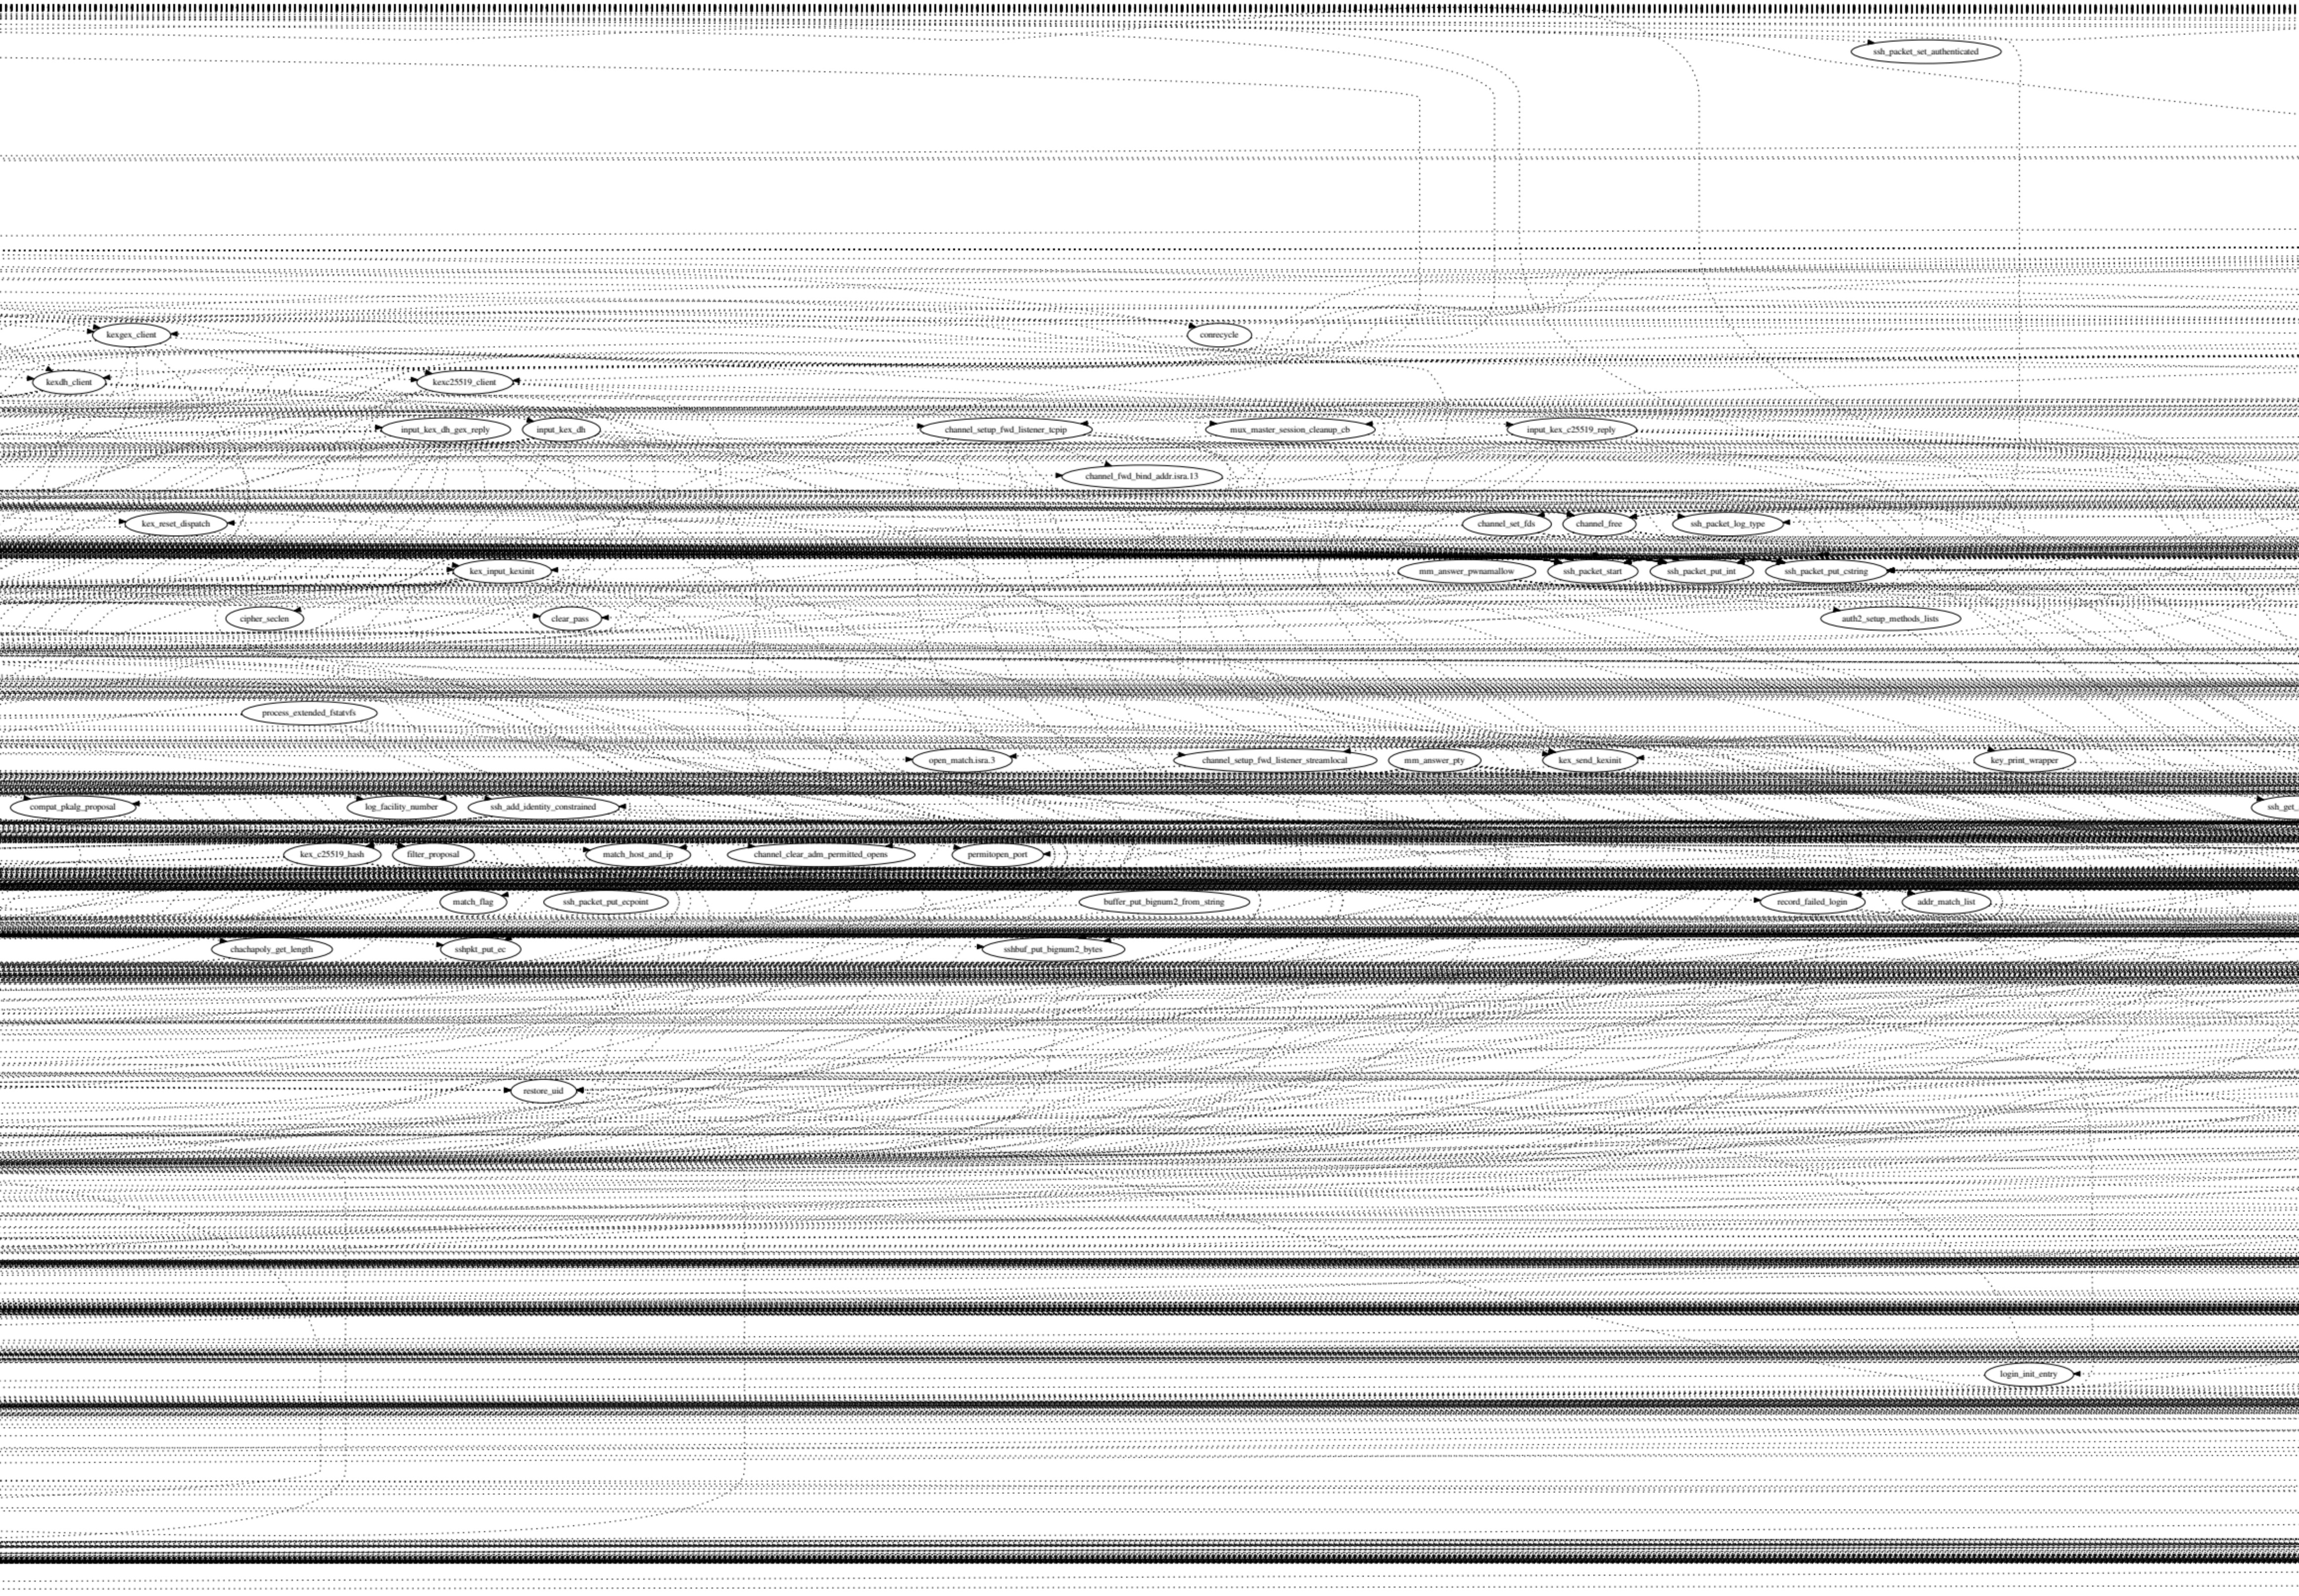
ssh_packet_set_authenticated
kexgex_client
conrecycle
kexdh_client
kexc25519_client
input_kex_dh_gex_reply
input_kex_dh
channel_setup_fwd_listener_tcpip
mux_master_session_cleanup_cb
input_kex_c25519_reply
channel_fwd_bind_addr.isra.13
kex_reset_dispatch
channel_set_fds
channel_free
ssh_packet_log_type
kex_input_kexinit
mm_answer_pwnamallow
ssh_packet_start
ssh_packet_put_int
ssh_packet_put_cstring
cipher_seclen
clear_pass
auth2_setup_methods_lists
process_extended_fstatvfs
open_match.isra.3
channel_setup_fwd_listener_streamlocal
mm_answer_pty
kex_send_kexinit
key_print_wrapper
compat_pkalg_proposal
log_facility_number
ssh_add_identity_constrained
ssh_get
kex_c25519_hash
filter_proposal
match_host_and_ip
channel_clear_adm_permitted_opens
permitopen_port
match_flag
ssh_packet_put_ecpoint
buffer_put_bignum2_from_string
record_failed_login
addr_match_list
chachapoly_get_length
sshpkt_put_ec
sshbuf_put_bignum2_bytes
restore_uid
login_init_entry

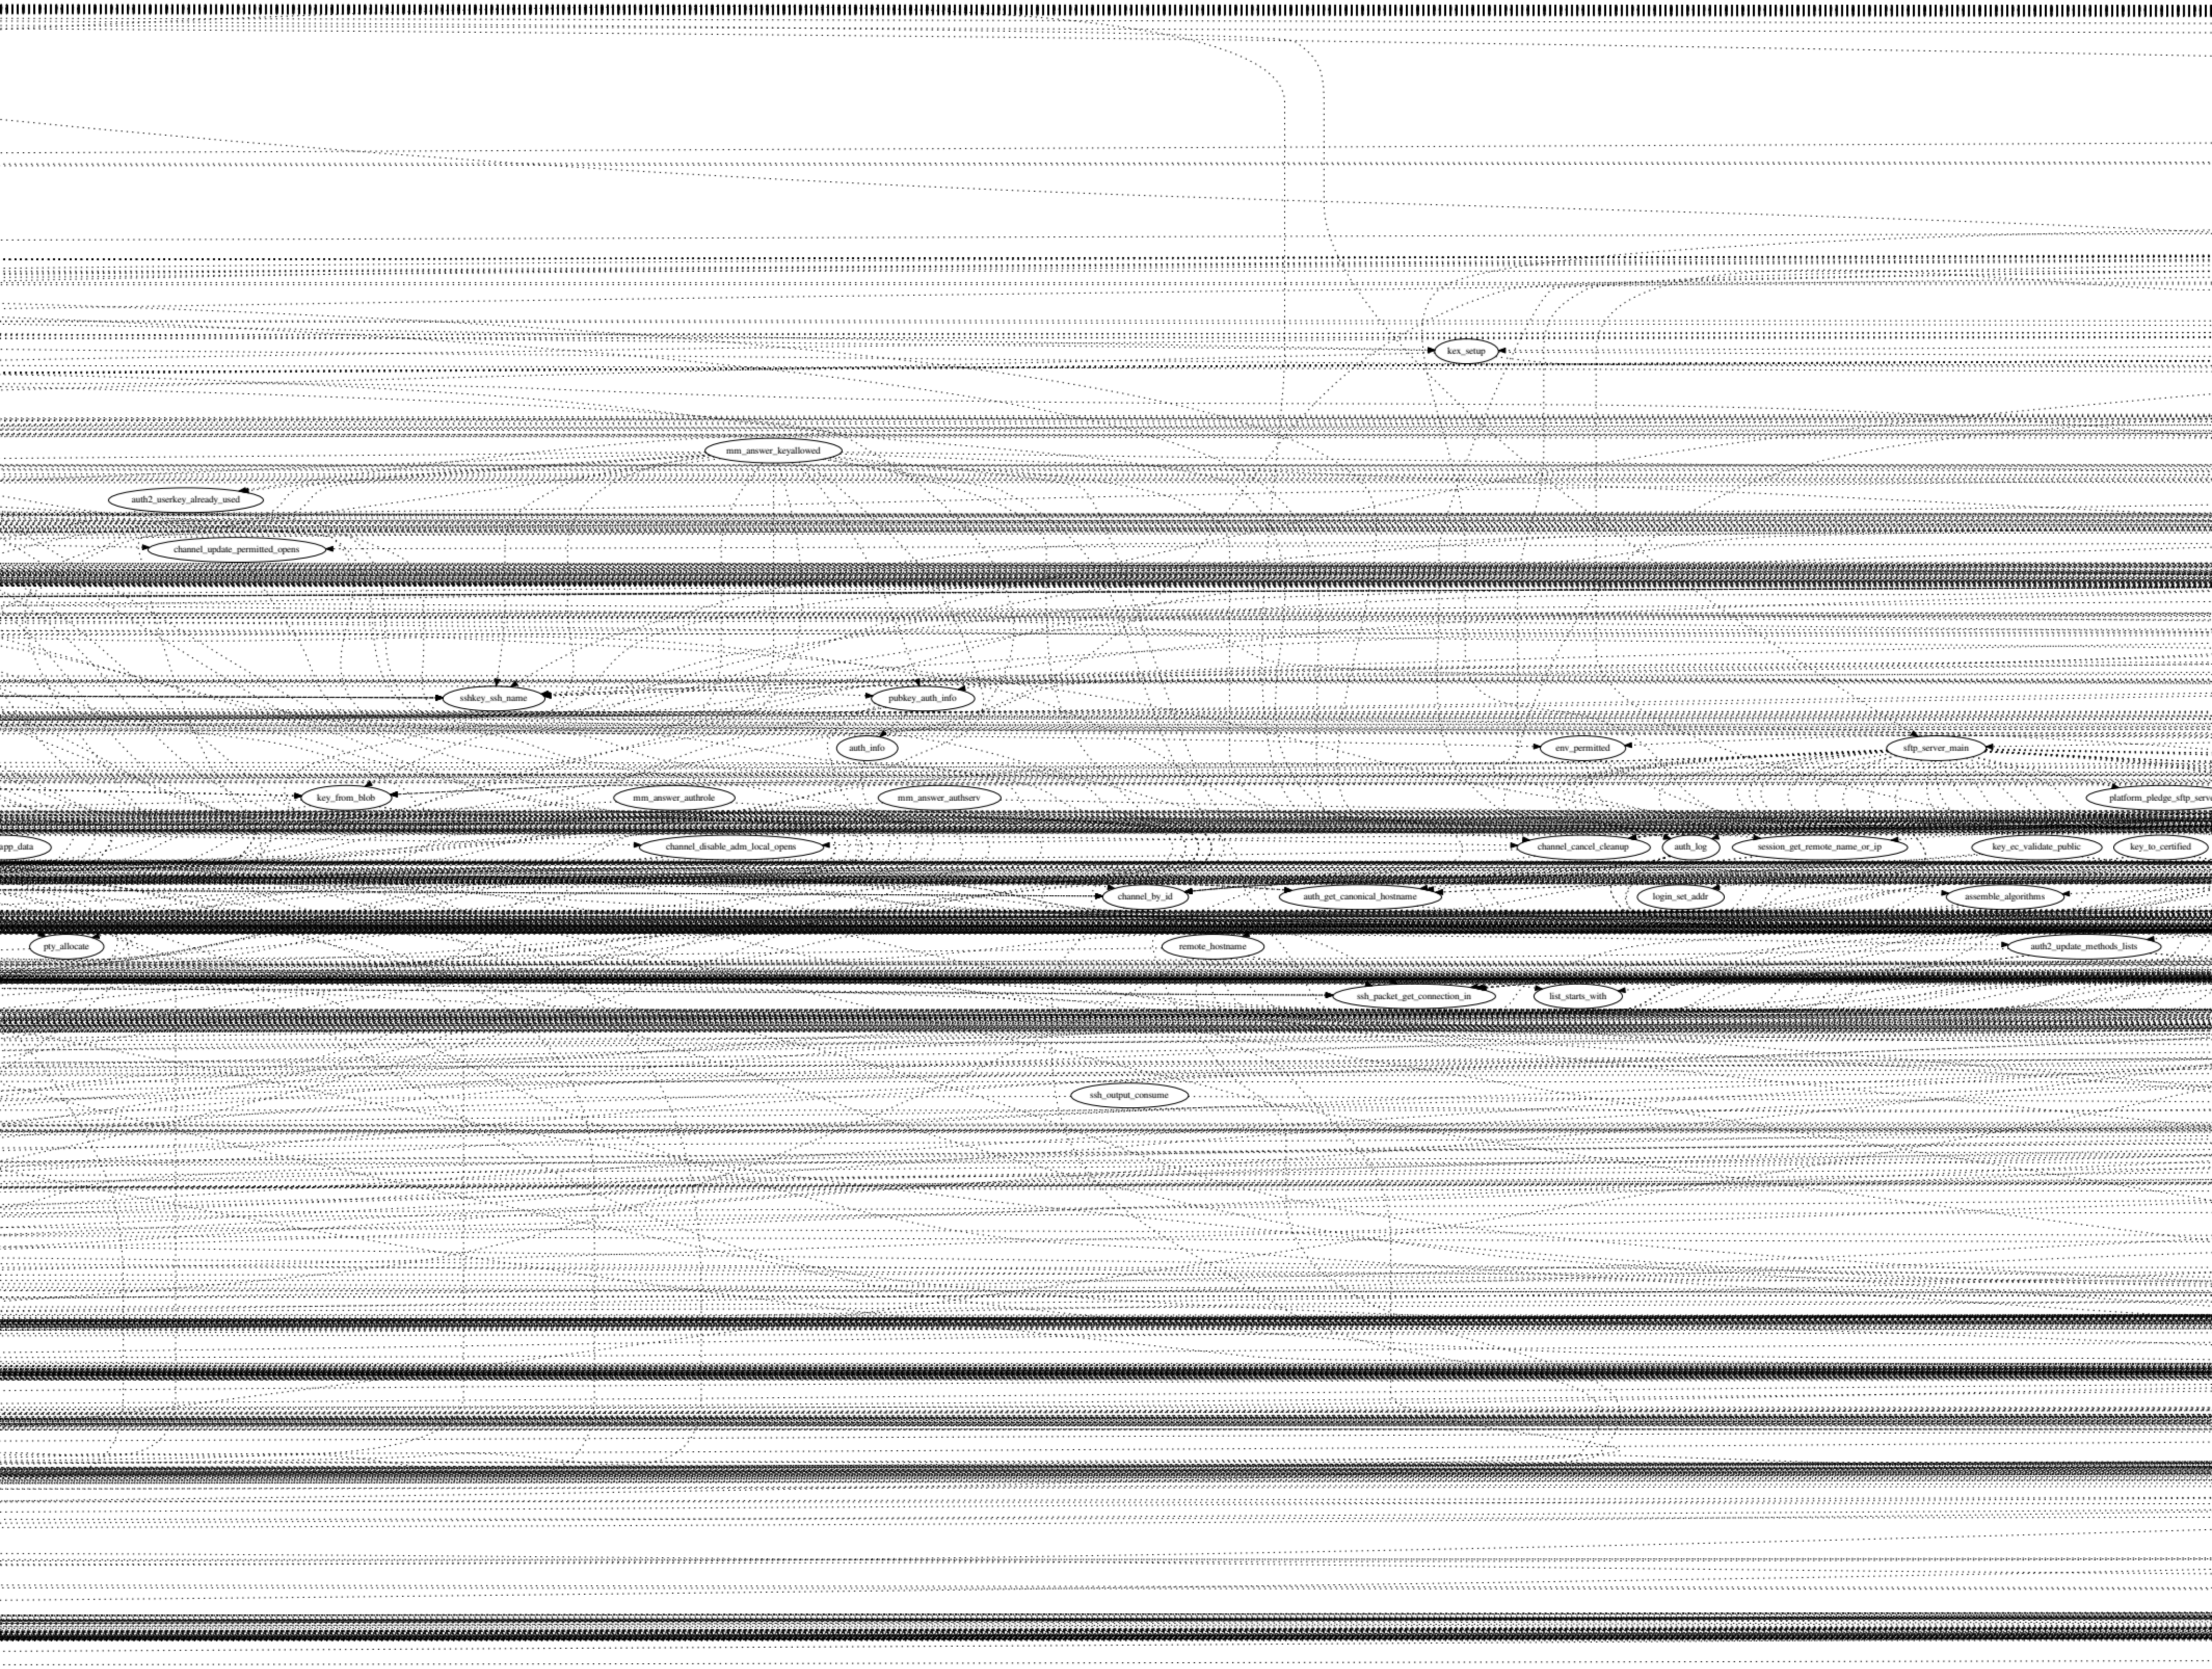
kex_setup
mm_answer_keyallowed
auth2_userkey_already_used
channel_update_permitted_opens
sshkey_ssh_name
pubkey_auth_info
auth_info
env_permitted
sftp_server_main
key_from_blob
mm_answer_authrole
mm_answer_authserv
platform_pledge_sftp_serv
app_data
channel_disable_adm_local_opens
channel_cancel_cleanup
auth_log
session_get_remote_name_or_ip
key_ec_validate_public
key_to_certified
channel_by_id
auth_get_canonical_hostname
login_set_addr
assemble_algorithms
pty_allocate
remote_hostname
auth2_update_methods_lists
ssh_packet_get_connection_in
list_starts_with
ssh_output_consume

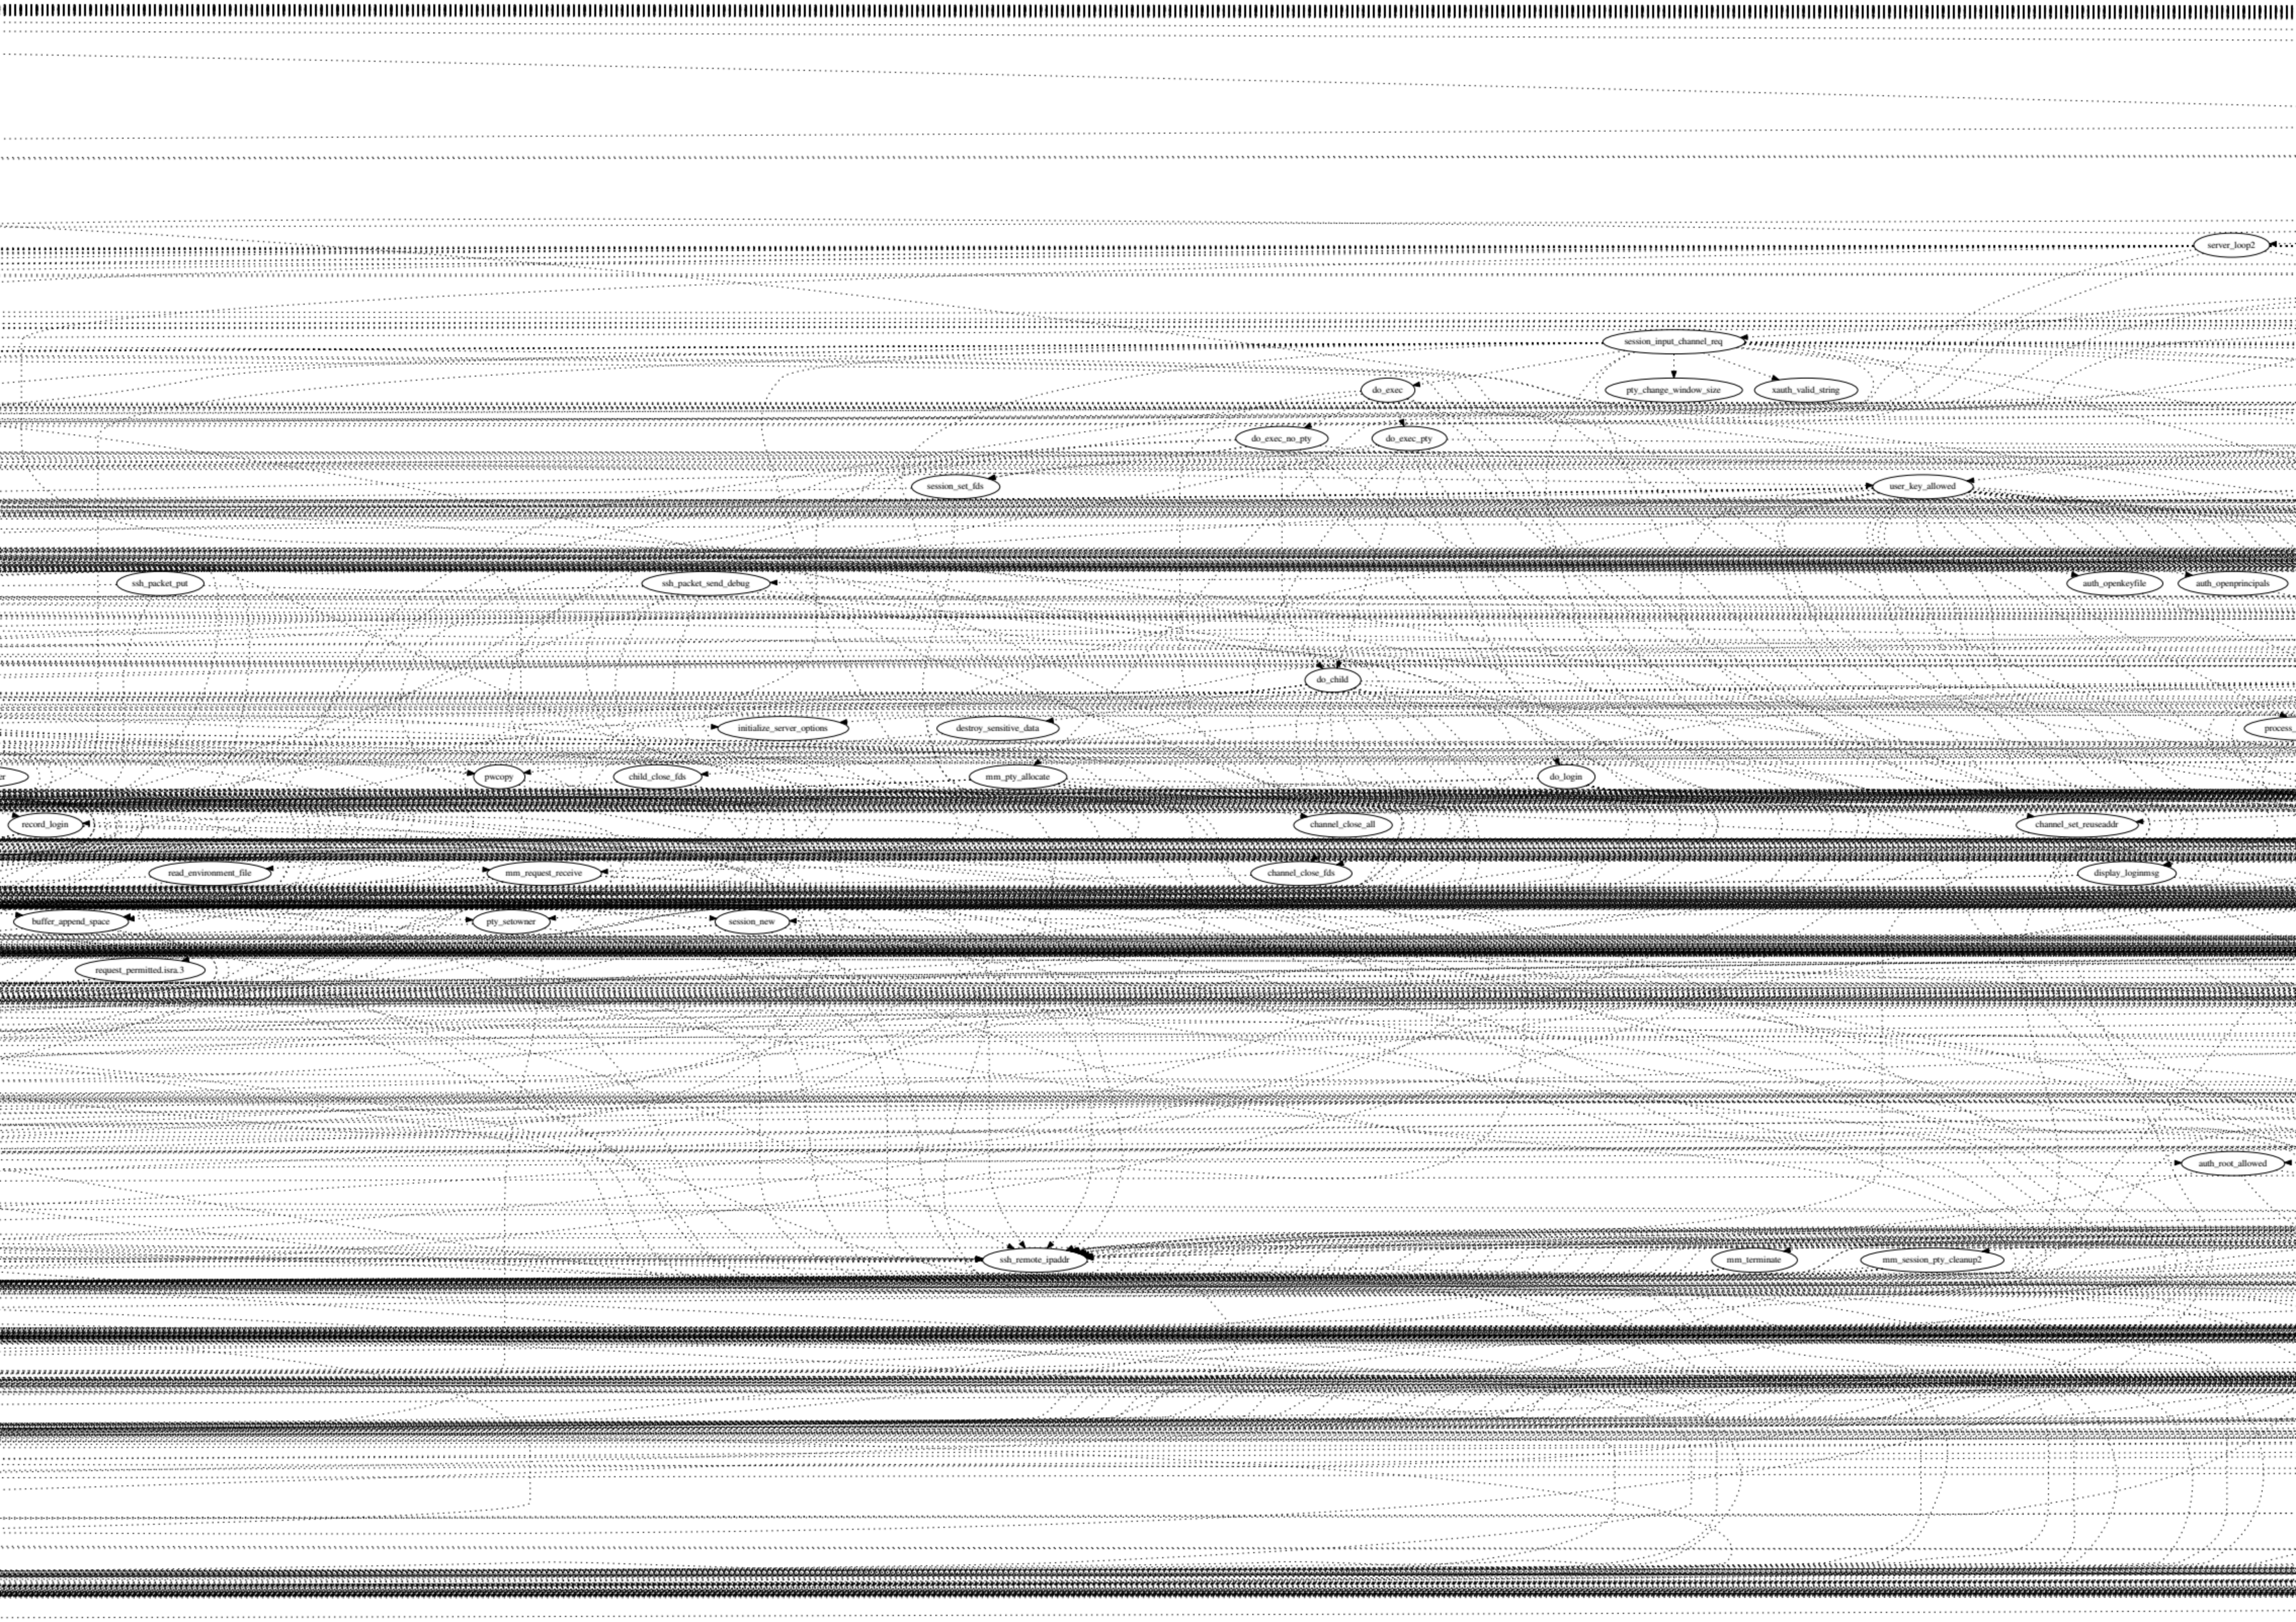
server_loop2
session_input_channel_req
do_exec
pty_change_window_size
xauth_valid_string
do_exec_no_pty
do_exec_pty
session_set_fds
user_key_allowed
ssh_packet_put
ssh_packet_send_debug
auth_openkeyfile
auth_openprincipals
do_child
initialize_server_options
destroy_sensitive_data
process_
pwcopy
child_close_fds
mm_pty_allocate
do_login
record_login
channel_close_all
channel_set_reuseaddr
read_environment_file
mm_request_receive
channel_close_fds
display_loginmsg
buffer_append_space
pty_setowner
session_new
request_permitted.isra.3
auth_root_allowed
ssh_remote_ipaddr
mm_terminate
mm_session_pty_cleanup2

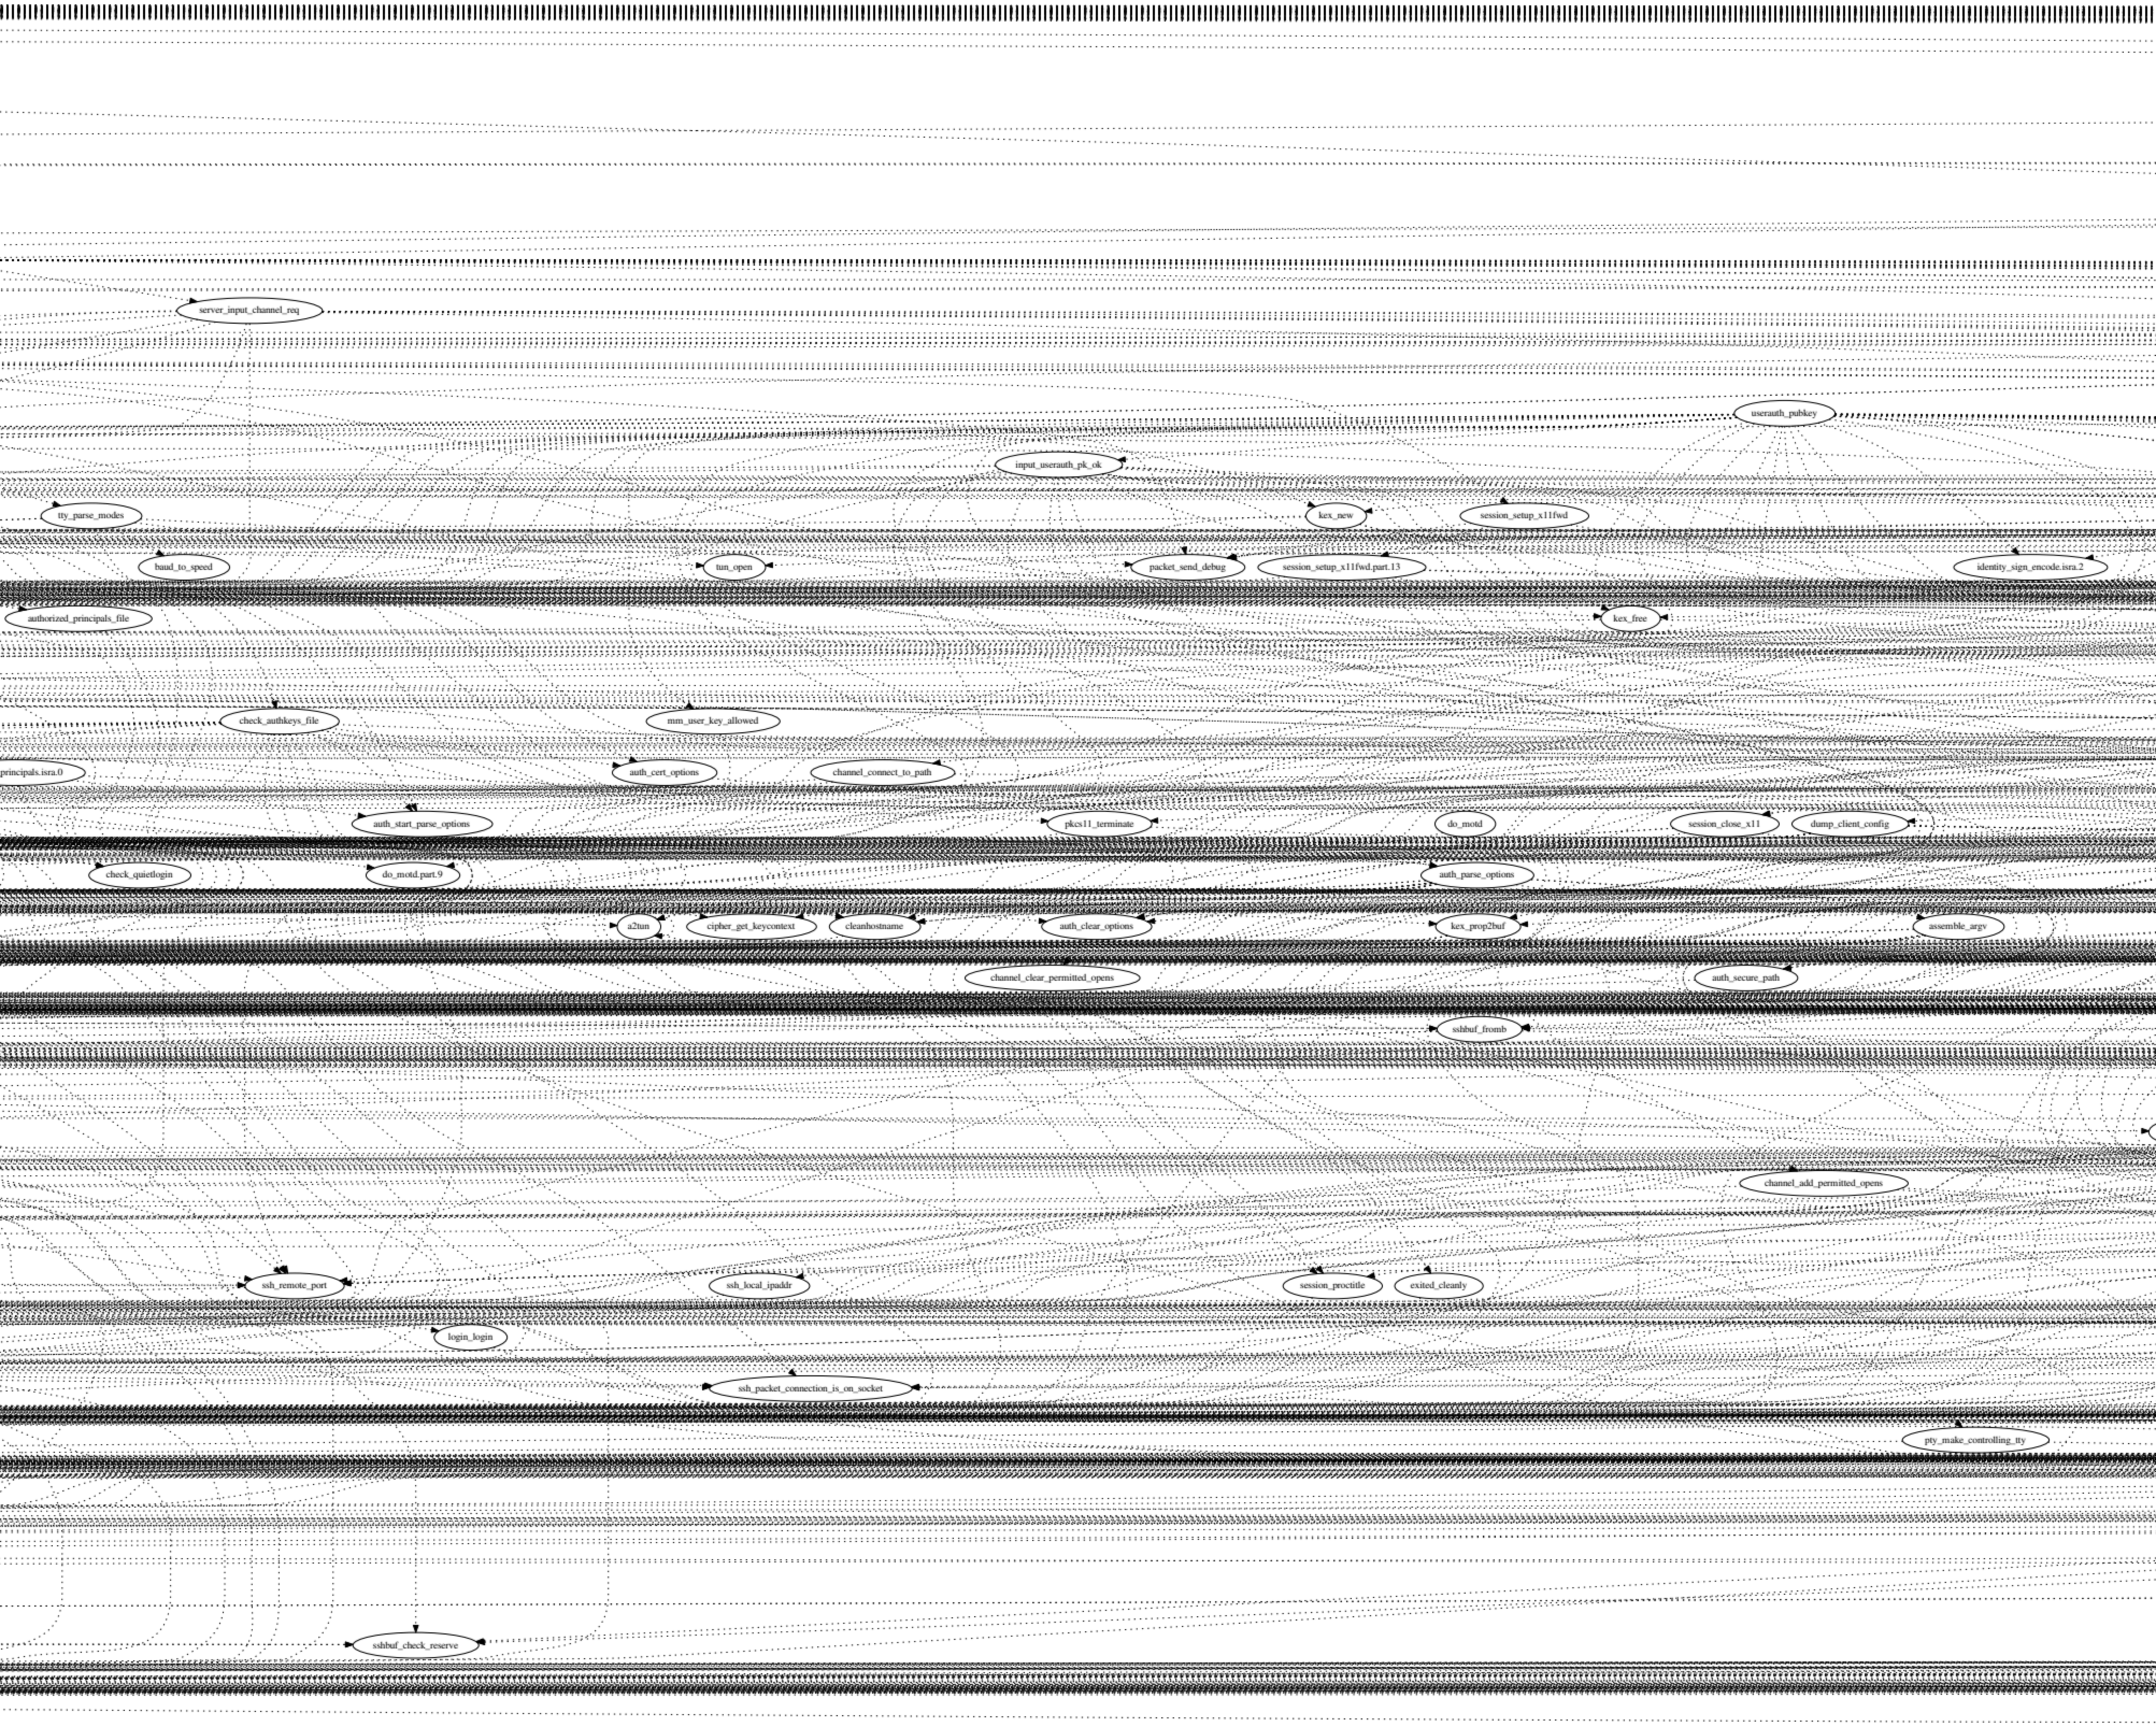
server_input_channel_req
userauth_pubkey
input_userauth_pk_ok
tty_parse_modes
kex_new
session_setup_x11fwd
baud_to_speed
tun_open
packet_send_debug
session_setup_x11fwd.part.13
identity_sign_encode.isra.2
authorized_principals_file
kex_free
check_authkeys_file
mm_user_key_allowed
principals.isra.0
auth_cert_options
channel_connect_to_path
auth_start_parse_options
pkcs11_terminate
do_motd
session_close_x11
dump_client_config
check_quietlogin
do_motd.part.9
auth_parse_options
a2tun
cipher_get_keycontext
cleanhostname
auth_clear_options
kex_prop2buf
assemble_argv
channel_clear_permitted_opens
auth_secure_path
sshbuf_fromb
channel_add_permitted_opens
ssh_remote_port
ssh_local_ipaddr
session_proctitle
exited_cleanly
login_login
ssh_packet_connection_is_on_socket
pty_make_controlling_tty
sshbuf_check_reserve

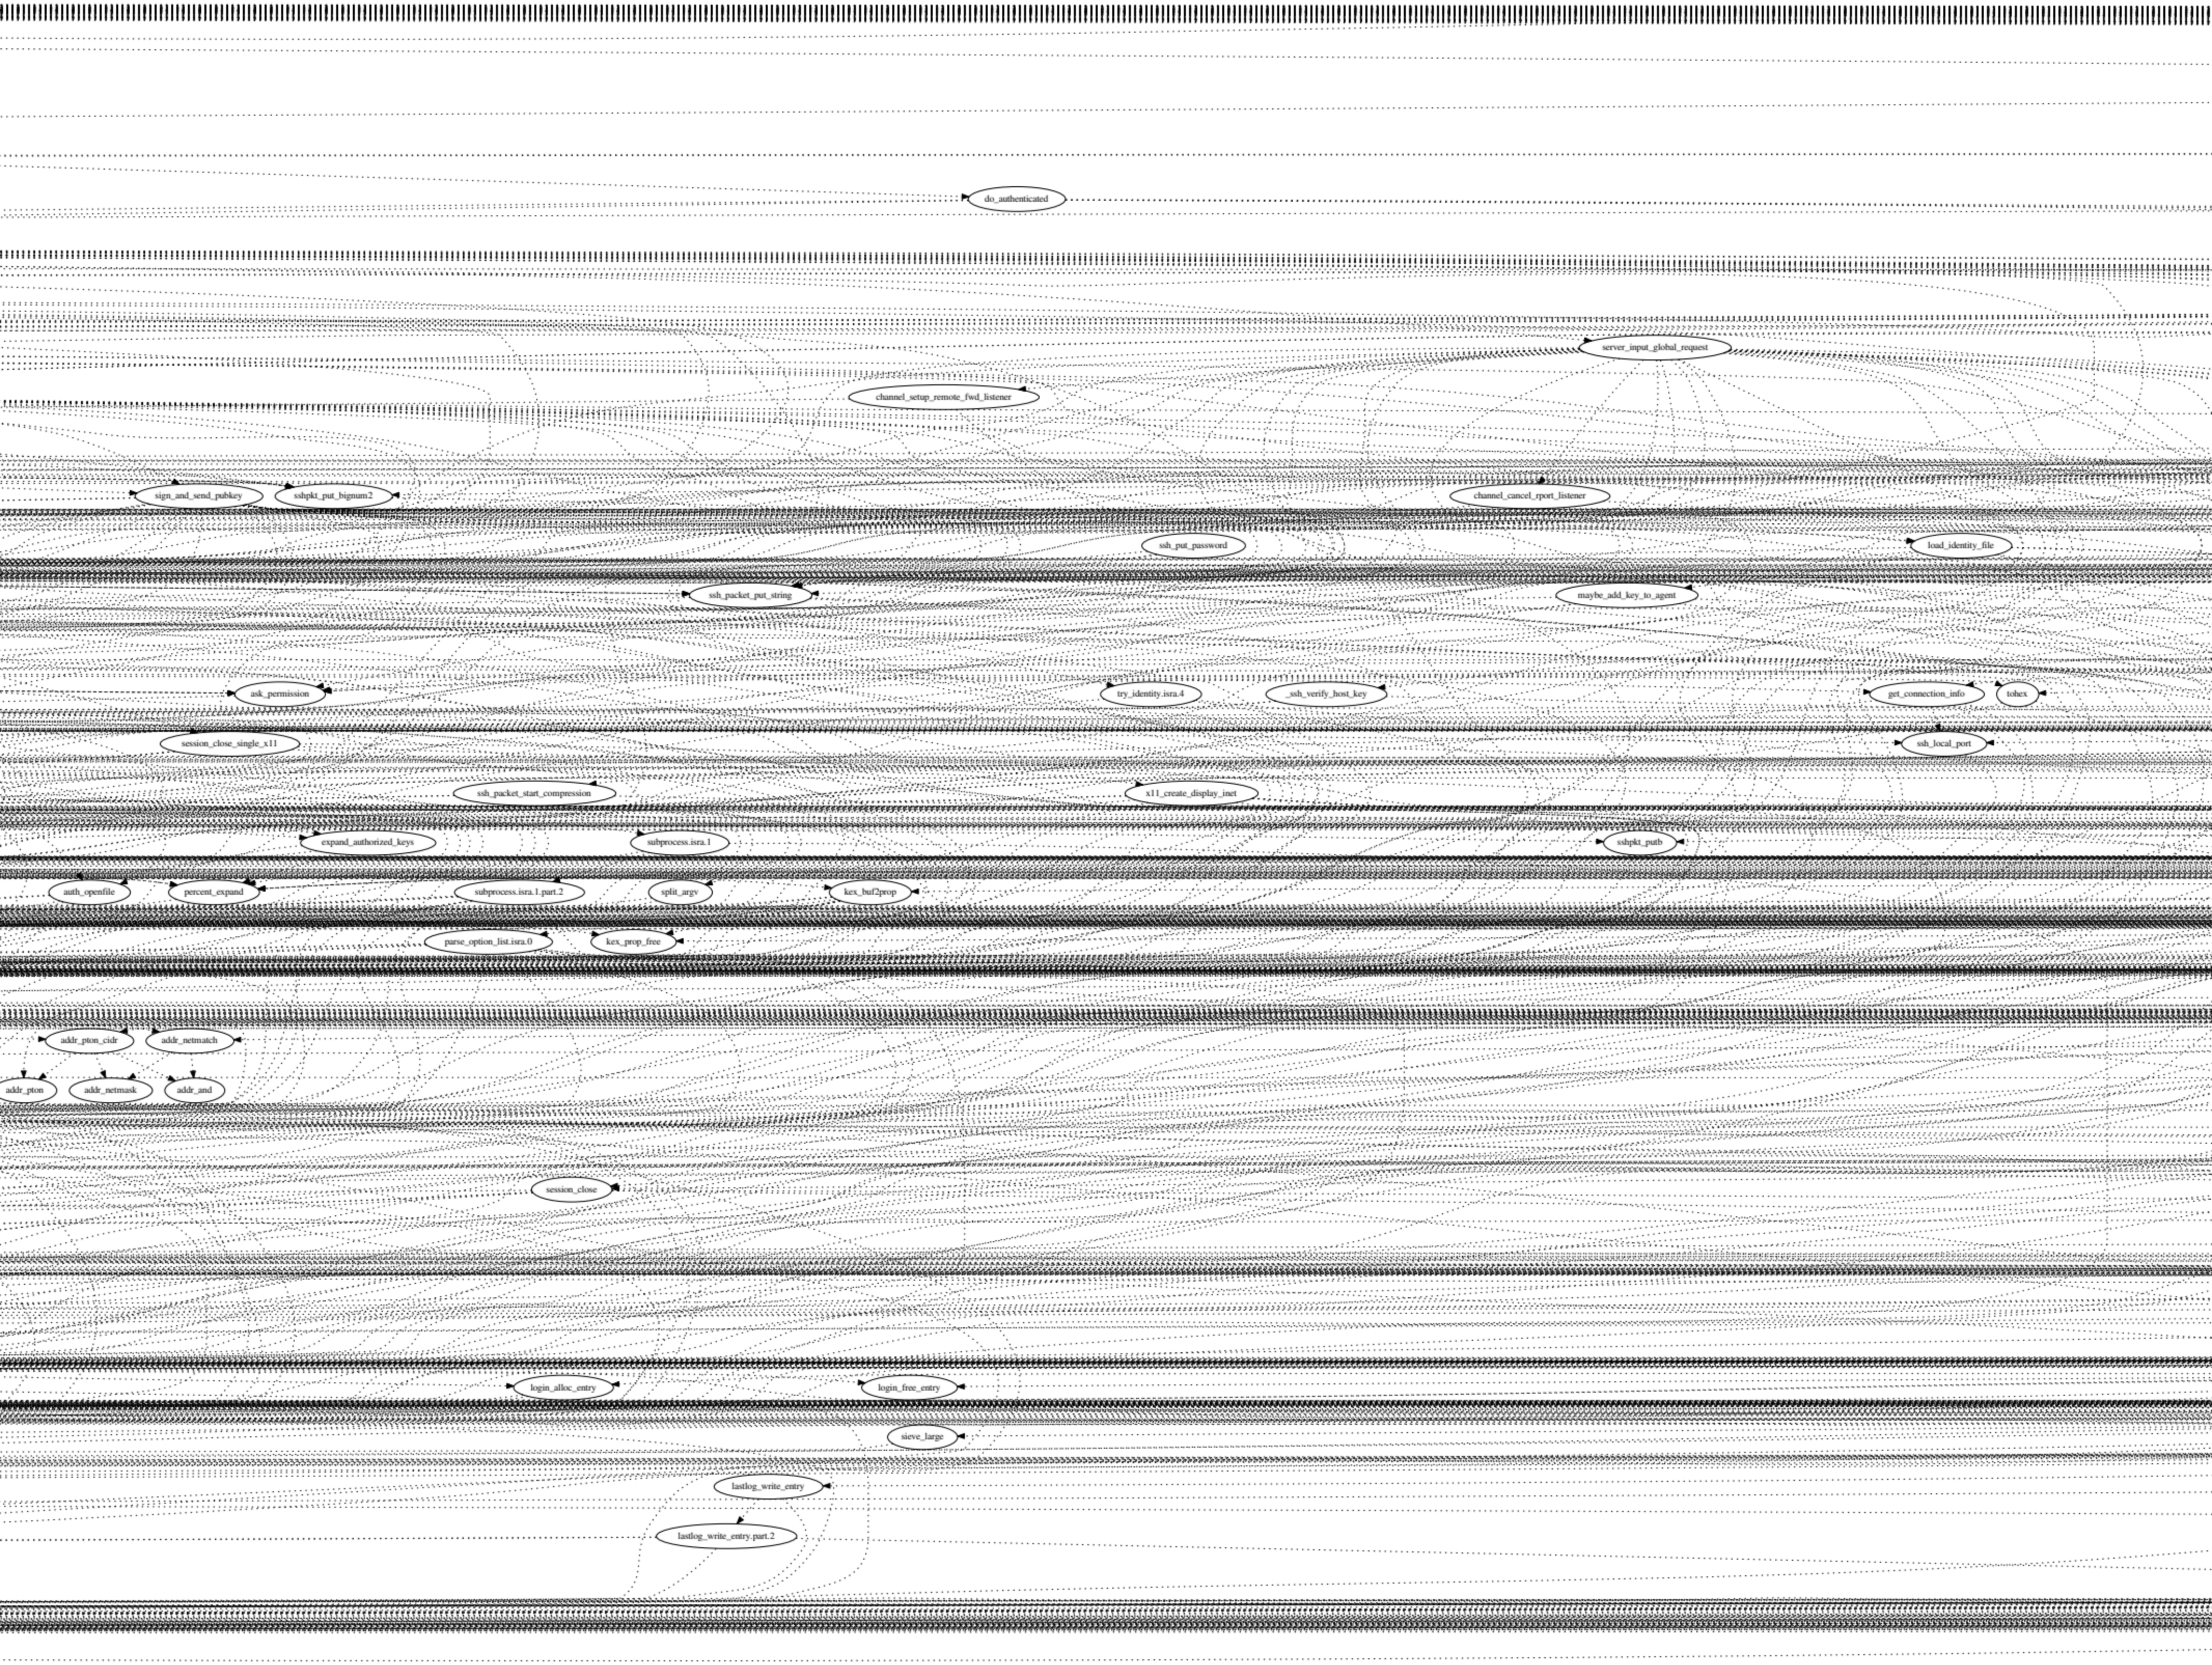
do_authenticated
server_input_global_request
channel_setup_remote_fwd_listener
sign_and_send_pubkey
sshpkt_put_bignum2
channel_cancel_rport_listener
ssh_put_password
load_identity_file
ssh_packet_put_string
maybe_add_key_to_agent
ask_permission
try_identity.isra.4
_ssh_verify_host_key
get_connection_info
tohex
session_close_single_x11
ssh_local_port
ssh_packet_start_compression
x11_create_display_inet
expand_authorized_keys
subprocess.isra.1
sshpkt_putb
auth_openfile
percent_expand
subprocess.isra.1.part.2
split_argv
kex_buf2prop
parse_option_list.isra.0
kex_prop_free
addr_pton_cidr
addr_netmatch
addr_pton
addr_netmask
addr_and
session_close
login_alloc_entry
login_free_entry
sieve_large
lastlog_write_entry
lastlog_write_entry.part.2

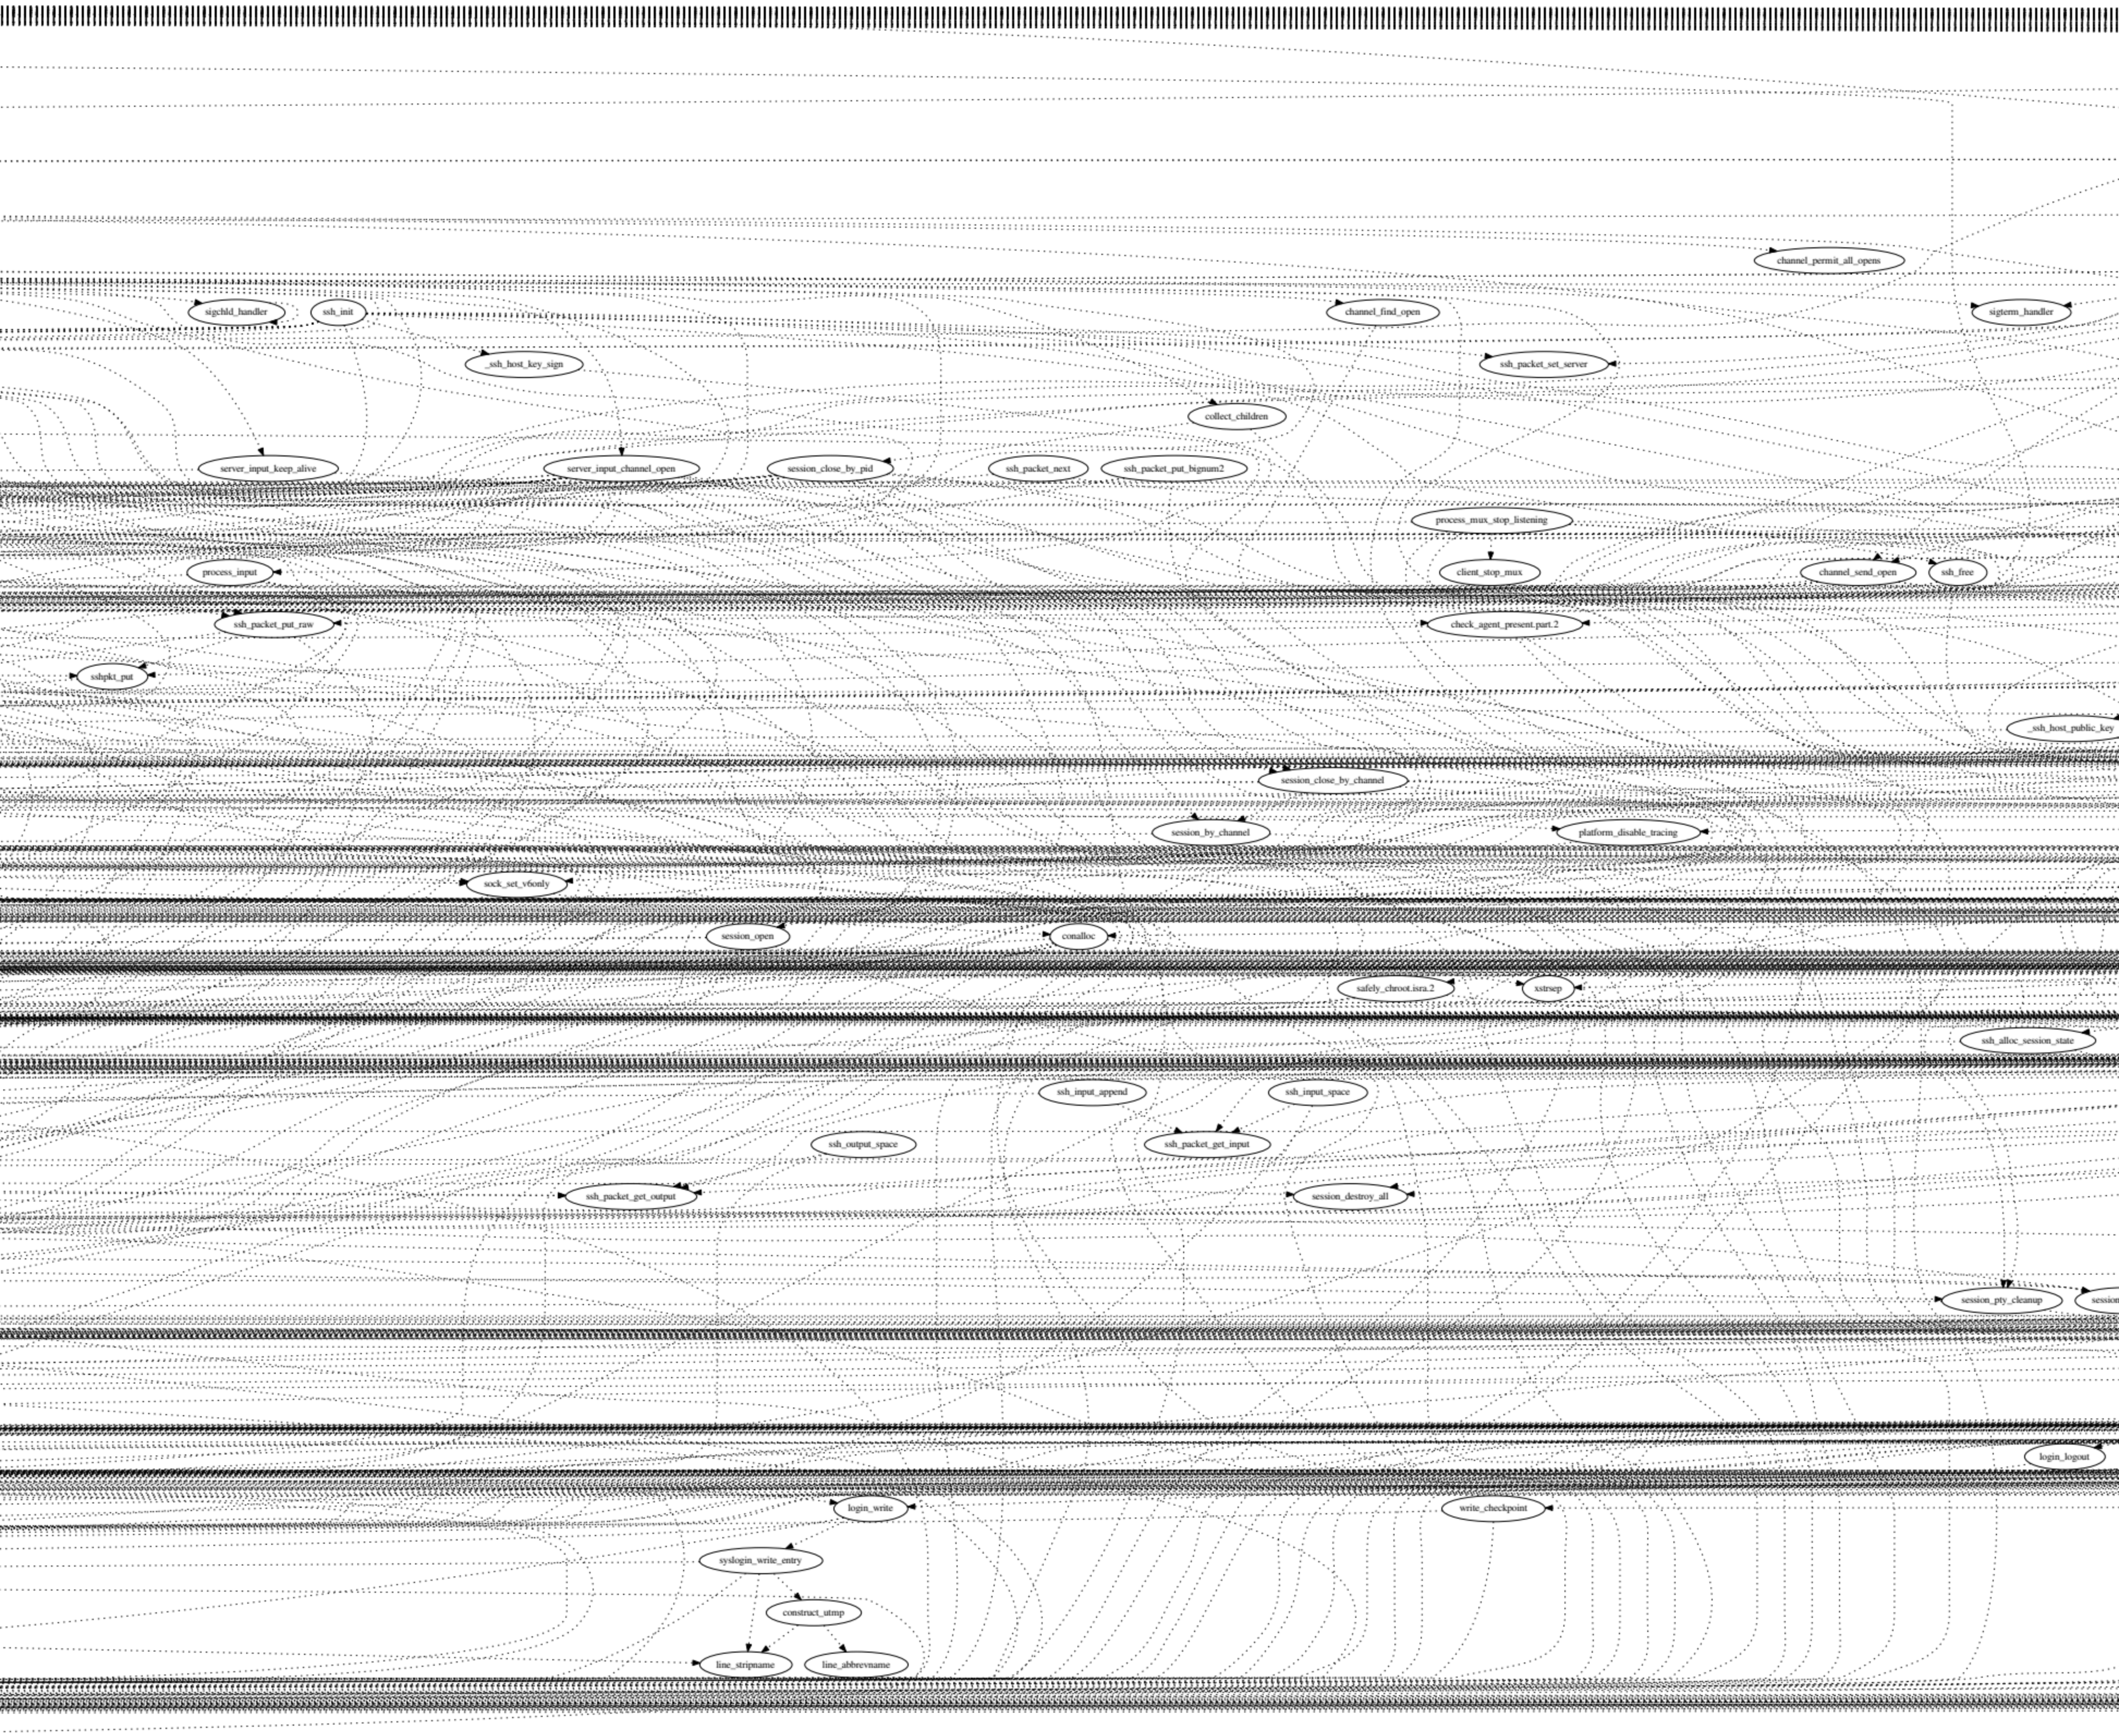
channel_permit_all_opens
sigchld_handler
ssh_init
channel_find_open
sigterm_handler
_ssh_host_key_sign
ssh_packet_set_server
collect_children
server_input_keep_alive
server_input_channel_open
session_close_by_pid
ssh_packet_next
ssh_packet_put_bignum2
process_mux_stop_listening
process_input
client_stop_mux
channel_send_open
ssh_free
ssh_packet_put_raw
check_agent_present.part.2
sshpkt_put
_ssh_host_public_key
session_close_by_channel
session_by_channel
platform_disable_tracing
sock_set_v6only
session_open
conalloc
safely_chroot.isra.2
xstrsep
ssh_alloc_session_state
ssh_input_append
ssh_input_space
ssh_output_space
ssh_packet_get_input
ssh_packet_get_output
session_destroy_all
session_pty_cleanup
session
login_logout
login_write
write_checkpoint
syslogin_write_entry
construct_utmp
line_stripname
line_abbrevname

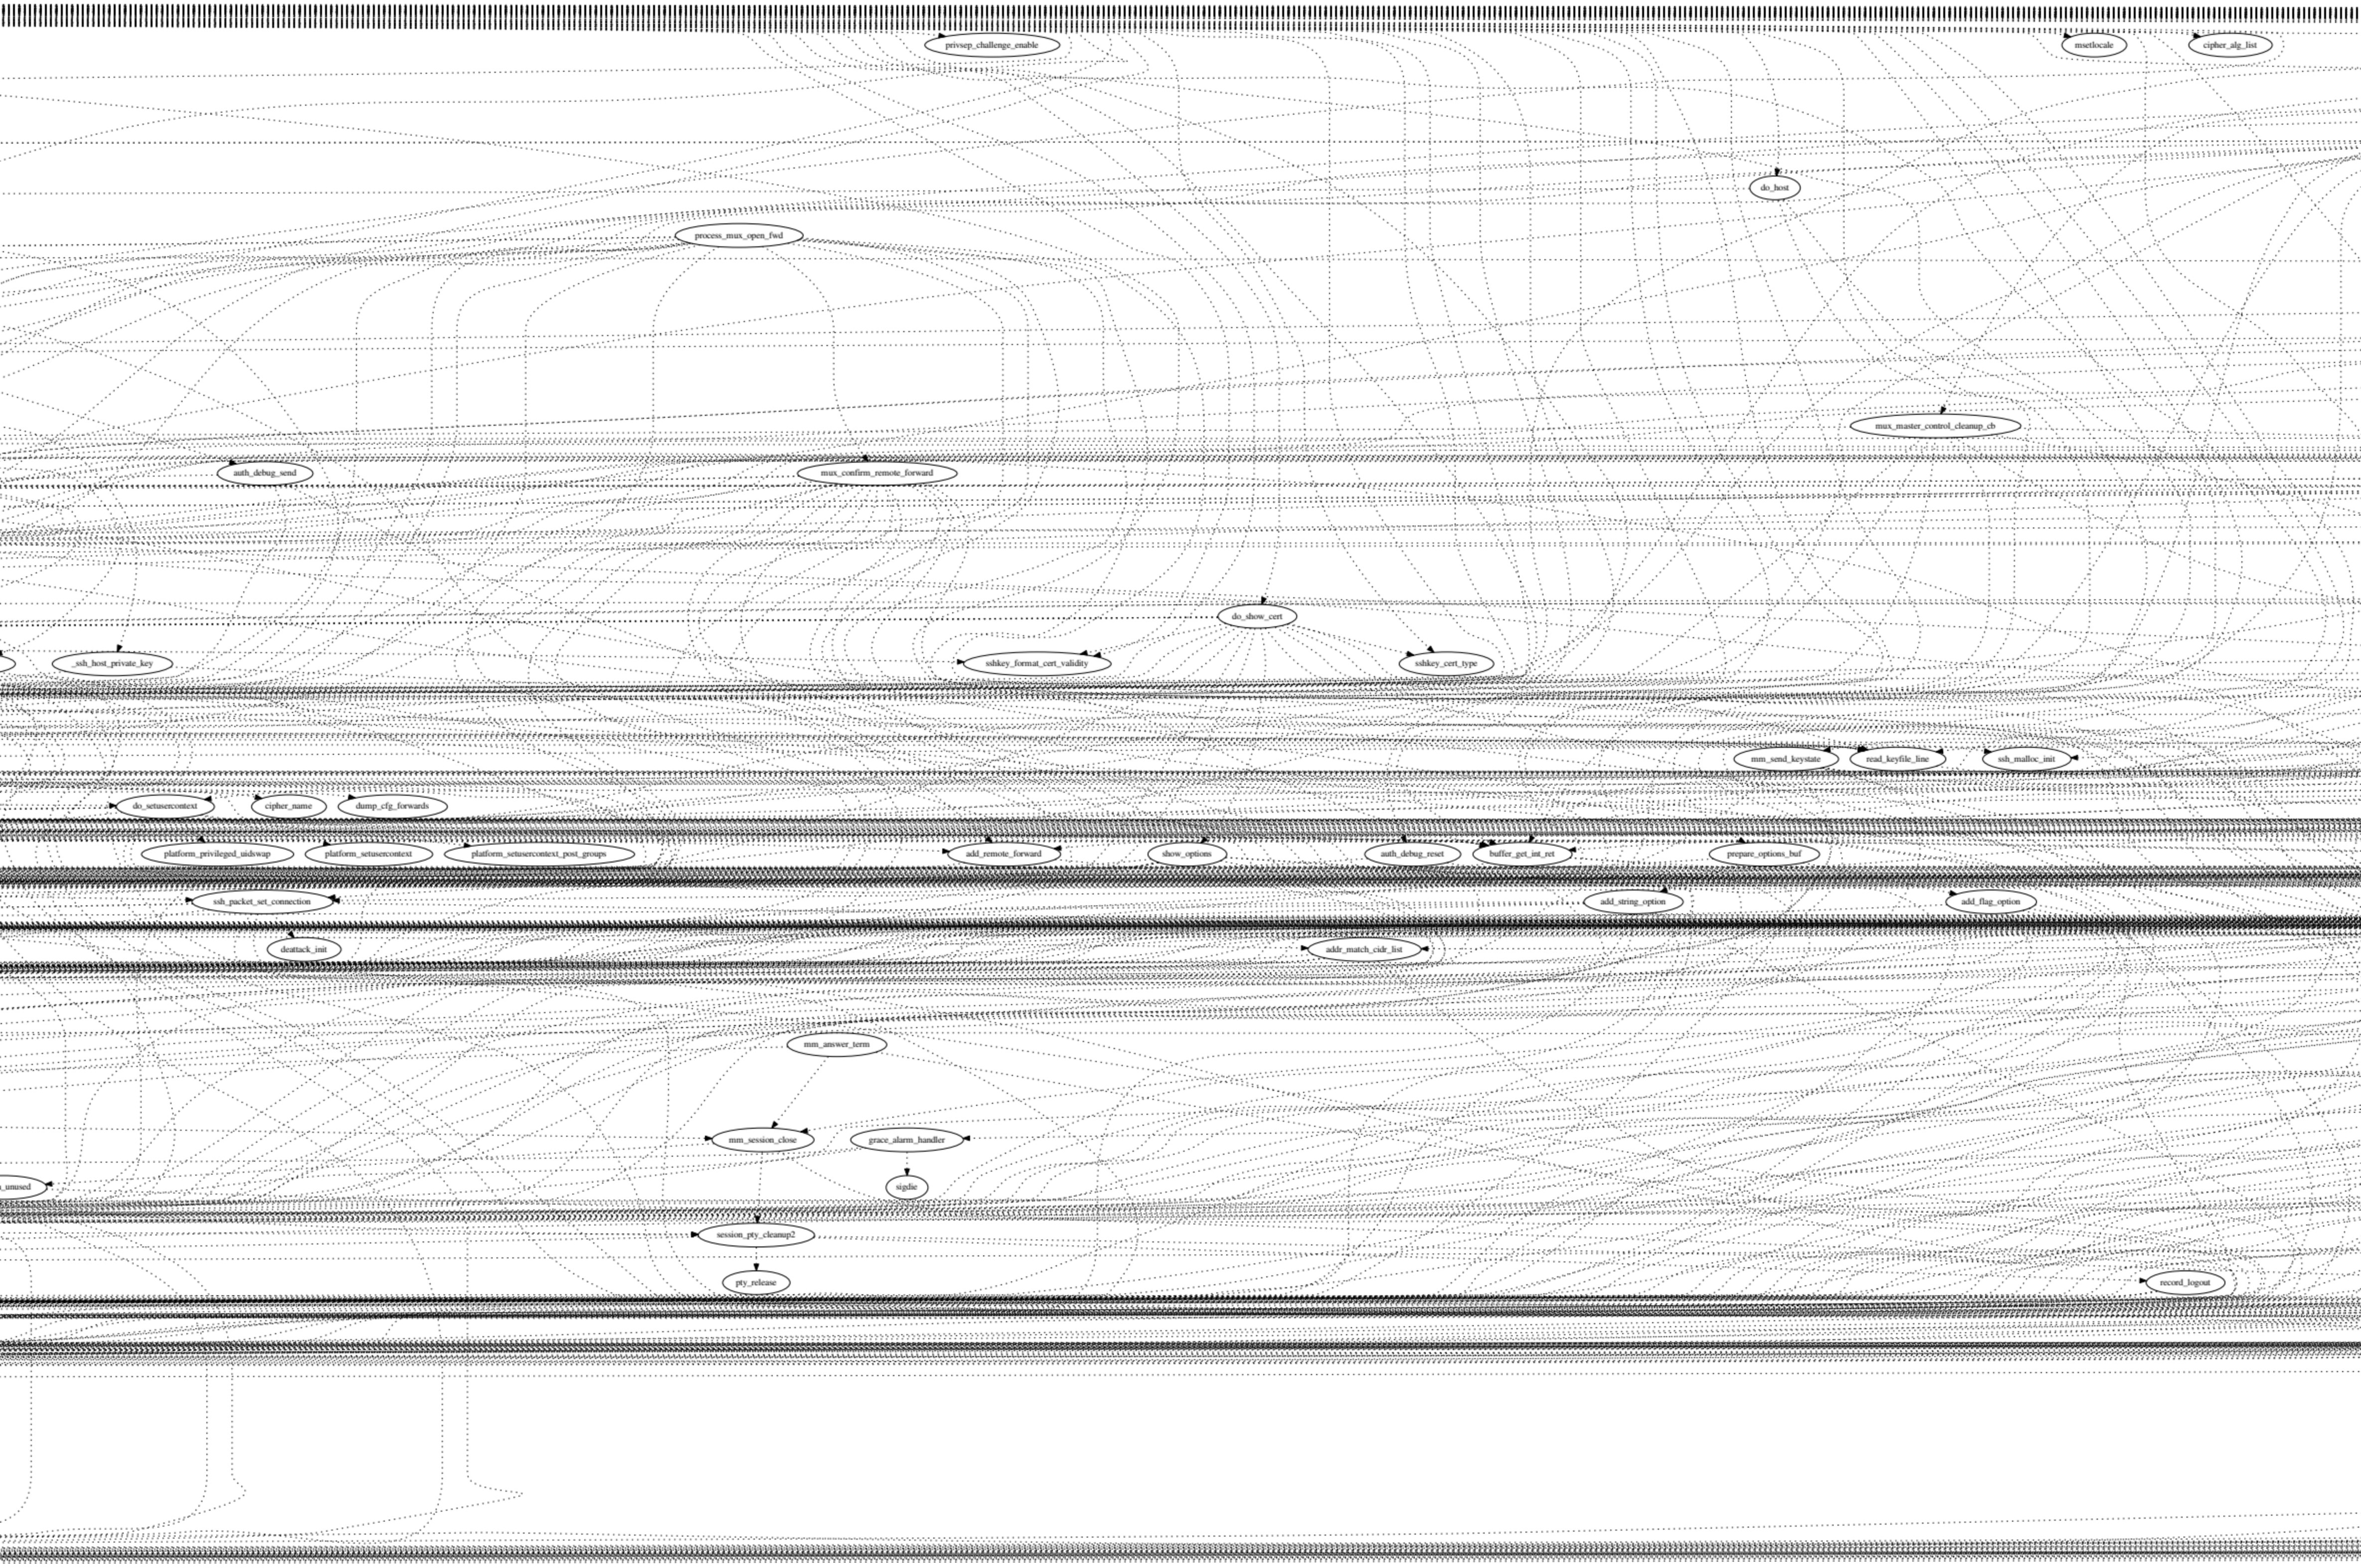
privsep_challenge_enable
msetlocale
cipher_alg_list
do_host
process_mux_open_fwd
mux_master_control_cleanup_cb
auth_debug_send
mux_confirm_remote_forward
do_show_cert
_ssh_host_private_key
sshkey_format_cert_validity
sshkey_cert_type
mm_send_keystate
read_keyfile_line
ssh_malloc_init
do_setusercontext
cipher_name
dump_cfg_forwards
platform_privileged_uidswap
platform_setusercontext
platform_setusercontext_post_groups
add_remote_forward
show_options
auth_debug_reset
buffer_get_int_ret
prepare_options_buf
ssh_packet_set_connection
add_string_option
add_flag_option
deattack_init
addr_match_cidr_list
mm_answer_term
mm_session_close
grace_alarm_handler
sigdie
_unused
session_pty_cleanup2
pty_release
record_logout

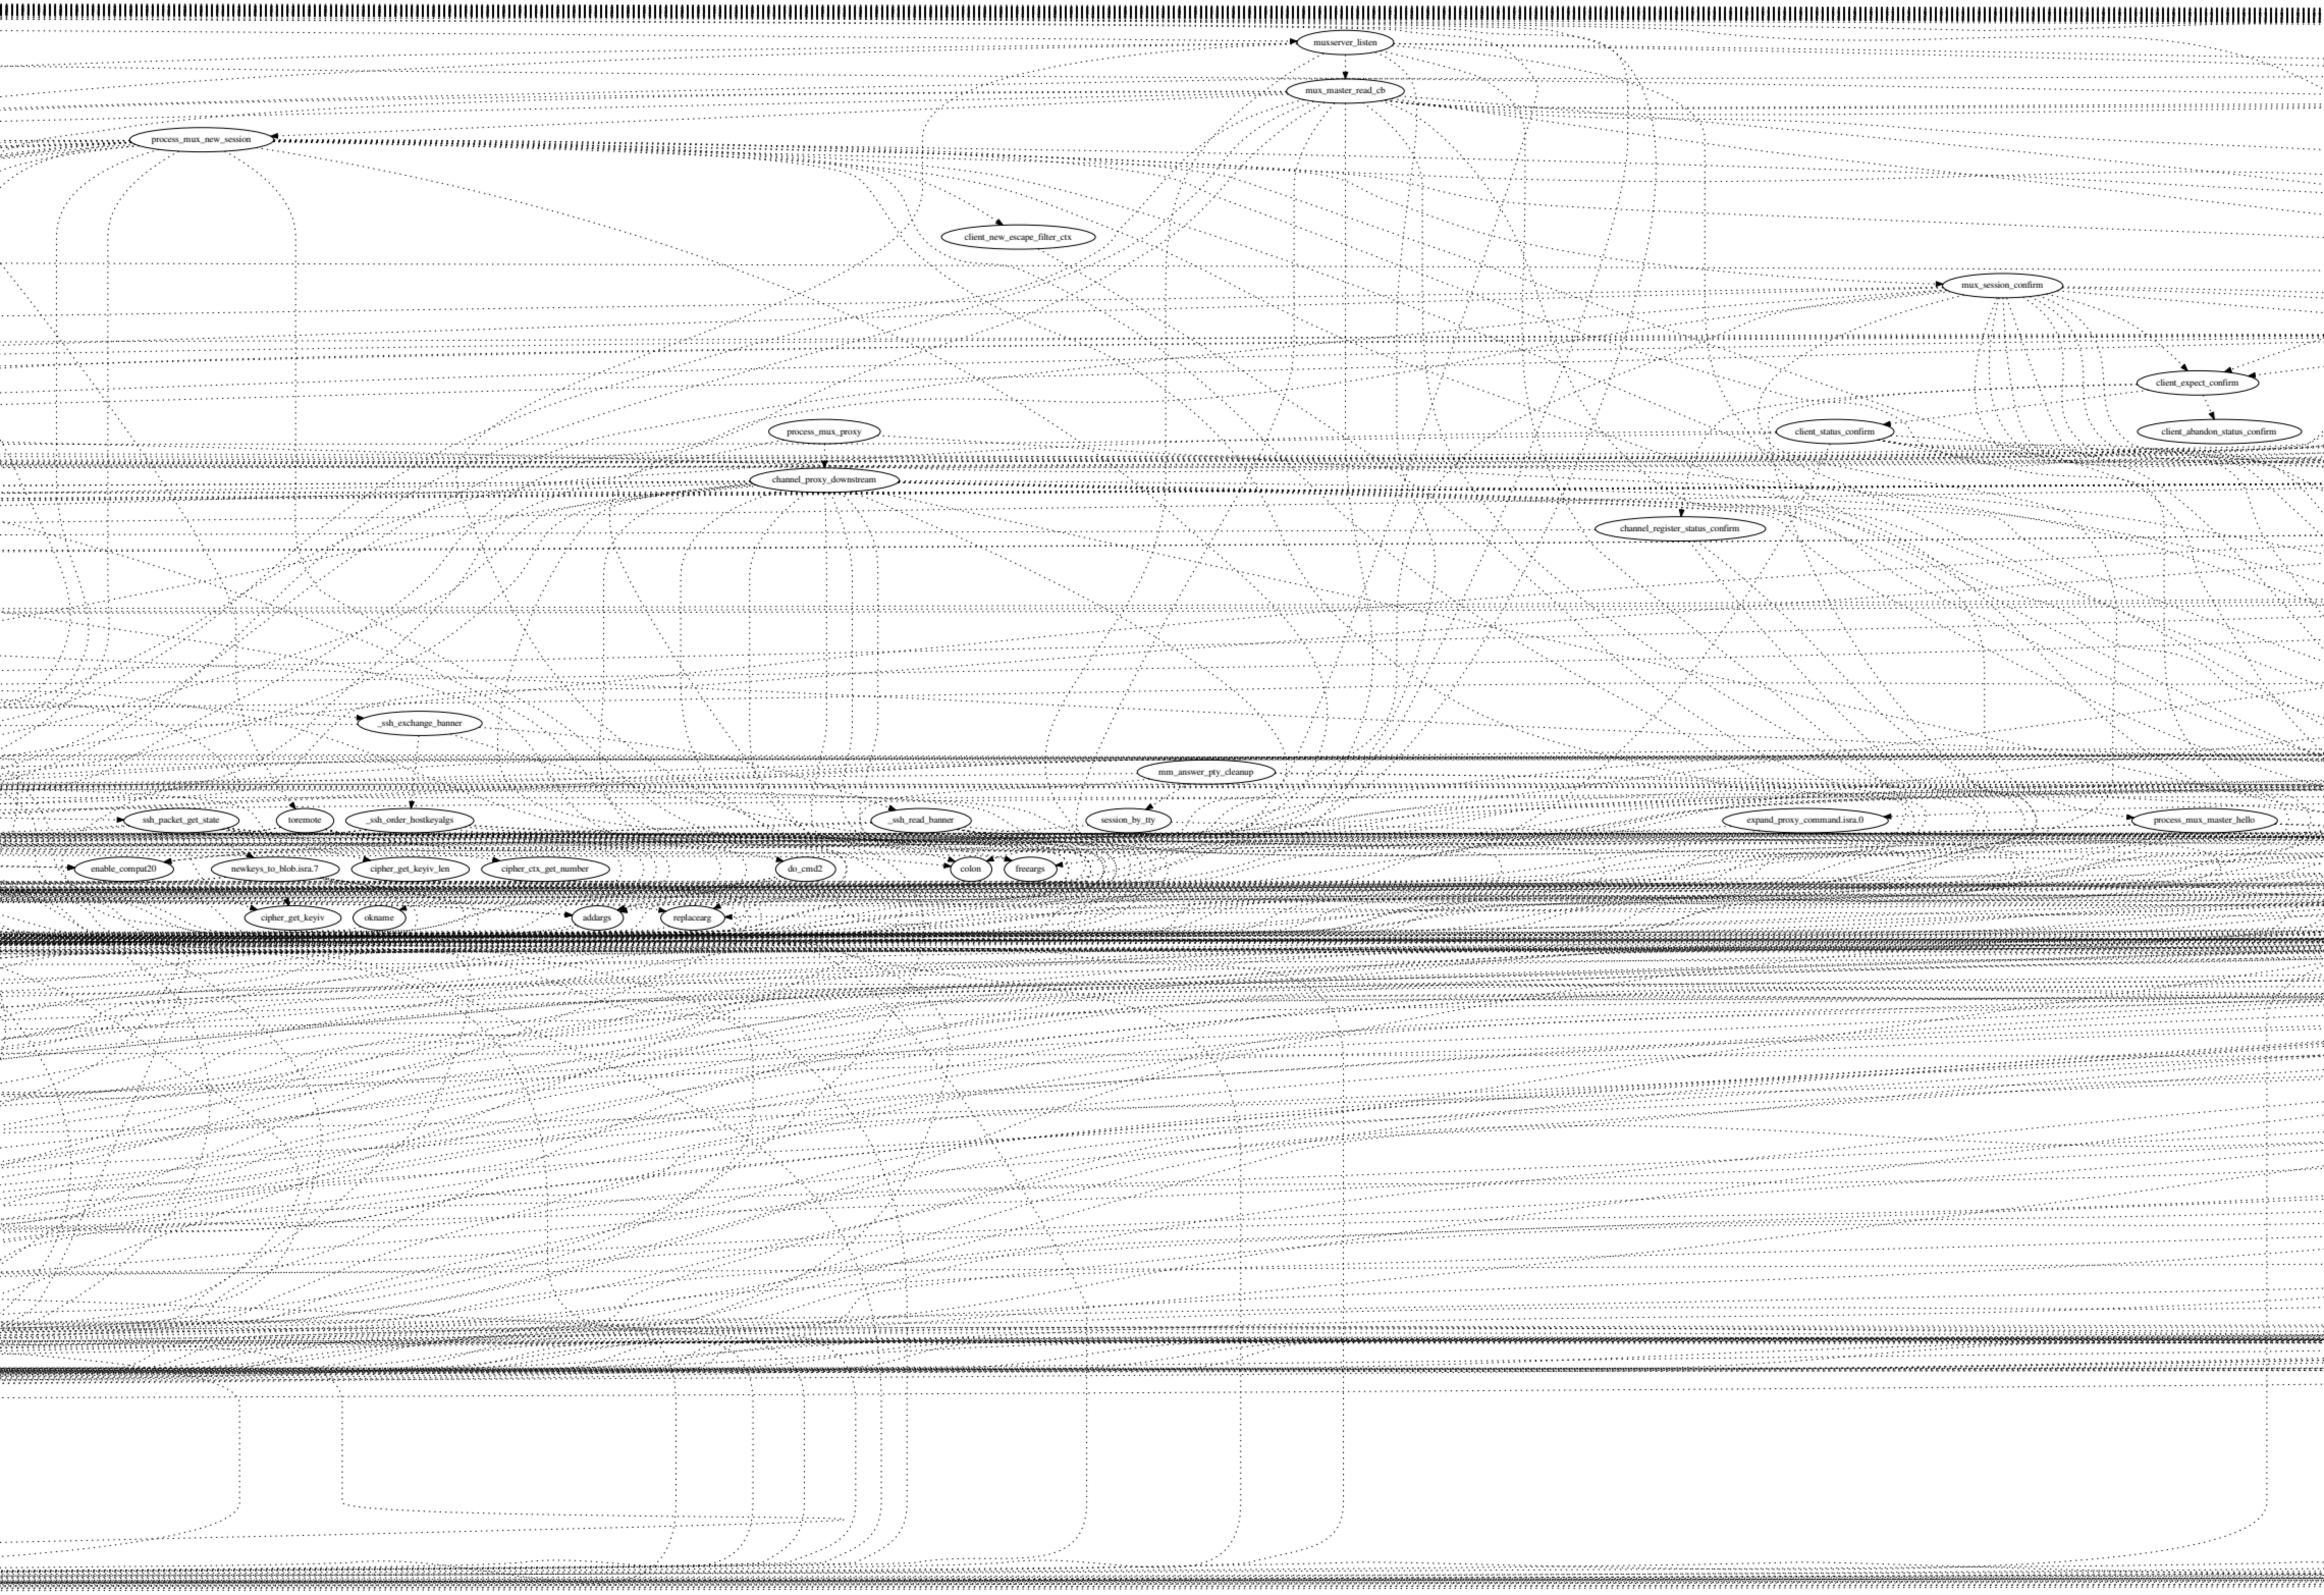
muxserver_listen
mux_master_read_cb
process_mux_new_session
client_new_escape_filter_ctx
mux_session_confirm
client_expect_confirm
process_mux_proxy
client_status_confirm
client_abandon_status_confirm
channel_proxy_downstream
channel_register_status_confirm
_ssh_exchange_banner
mm_answer_pty_cleanup
ssh_packet_get_state
toremote
_ssh_order_hostkeyalgs
_ssh_read_banner
session_by_tty
expand_proxy_command.isra.0
process_mux_master_hello
enable_compat20
newkeys_to_blob.isra.7
cipher_get_keyiv_len
cipher_ctx_get_number
do_cmd2
colon
freeargs
cipher_get_keyiv
okname
addargs
replacearg

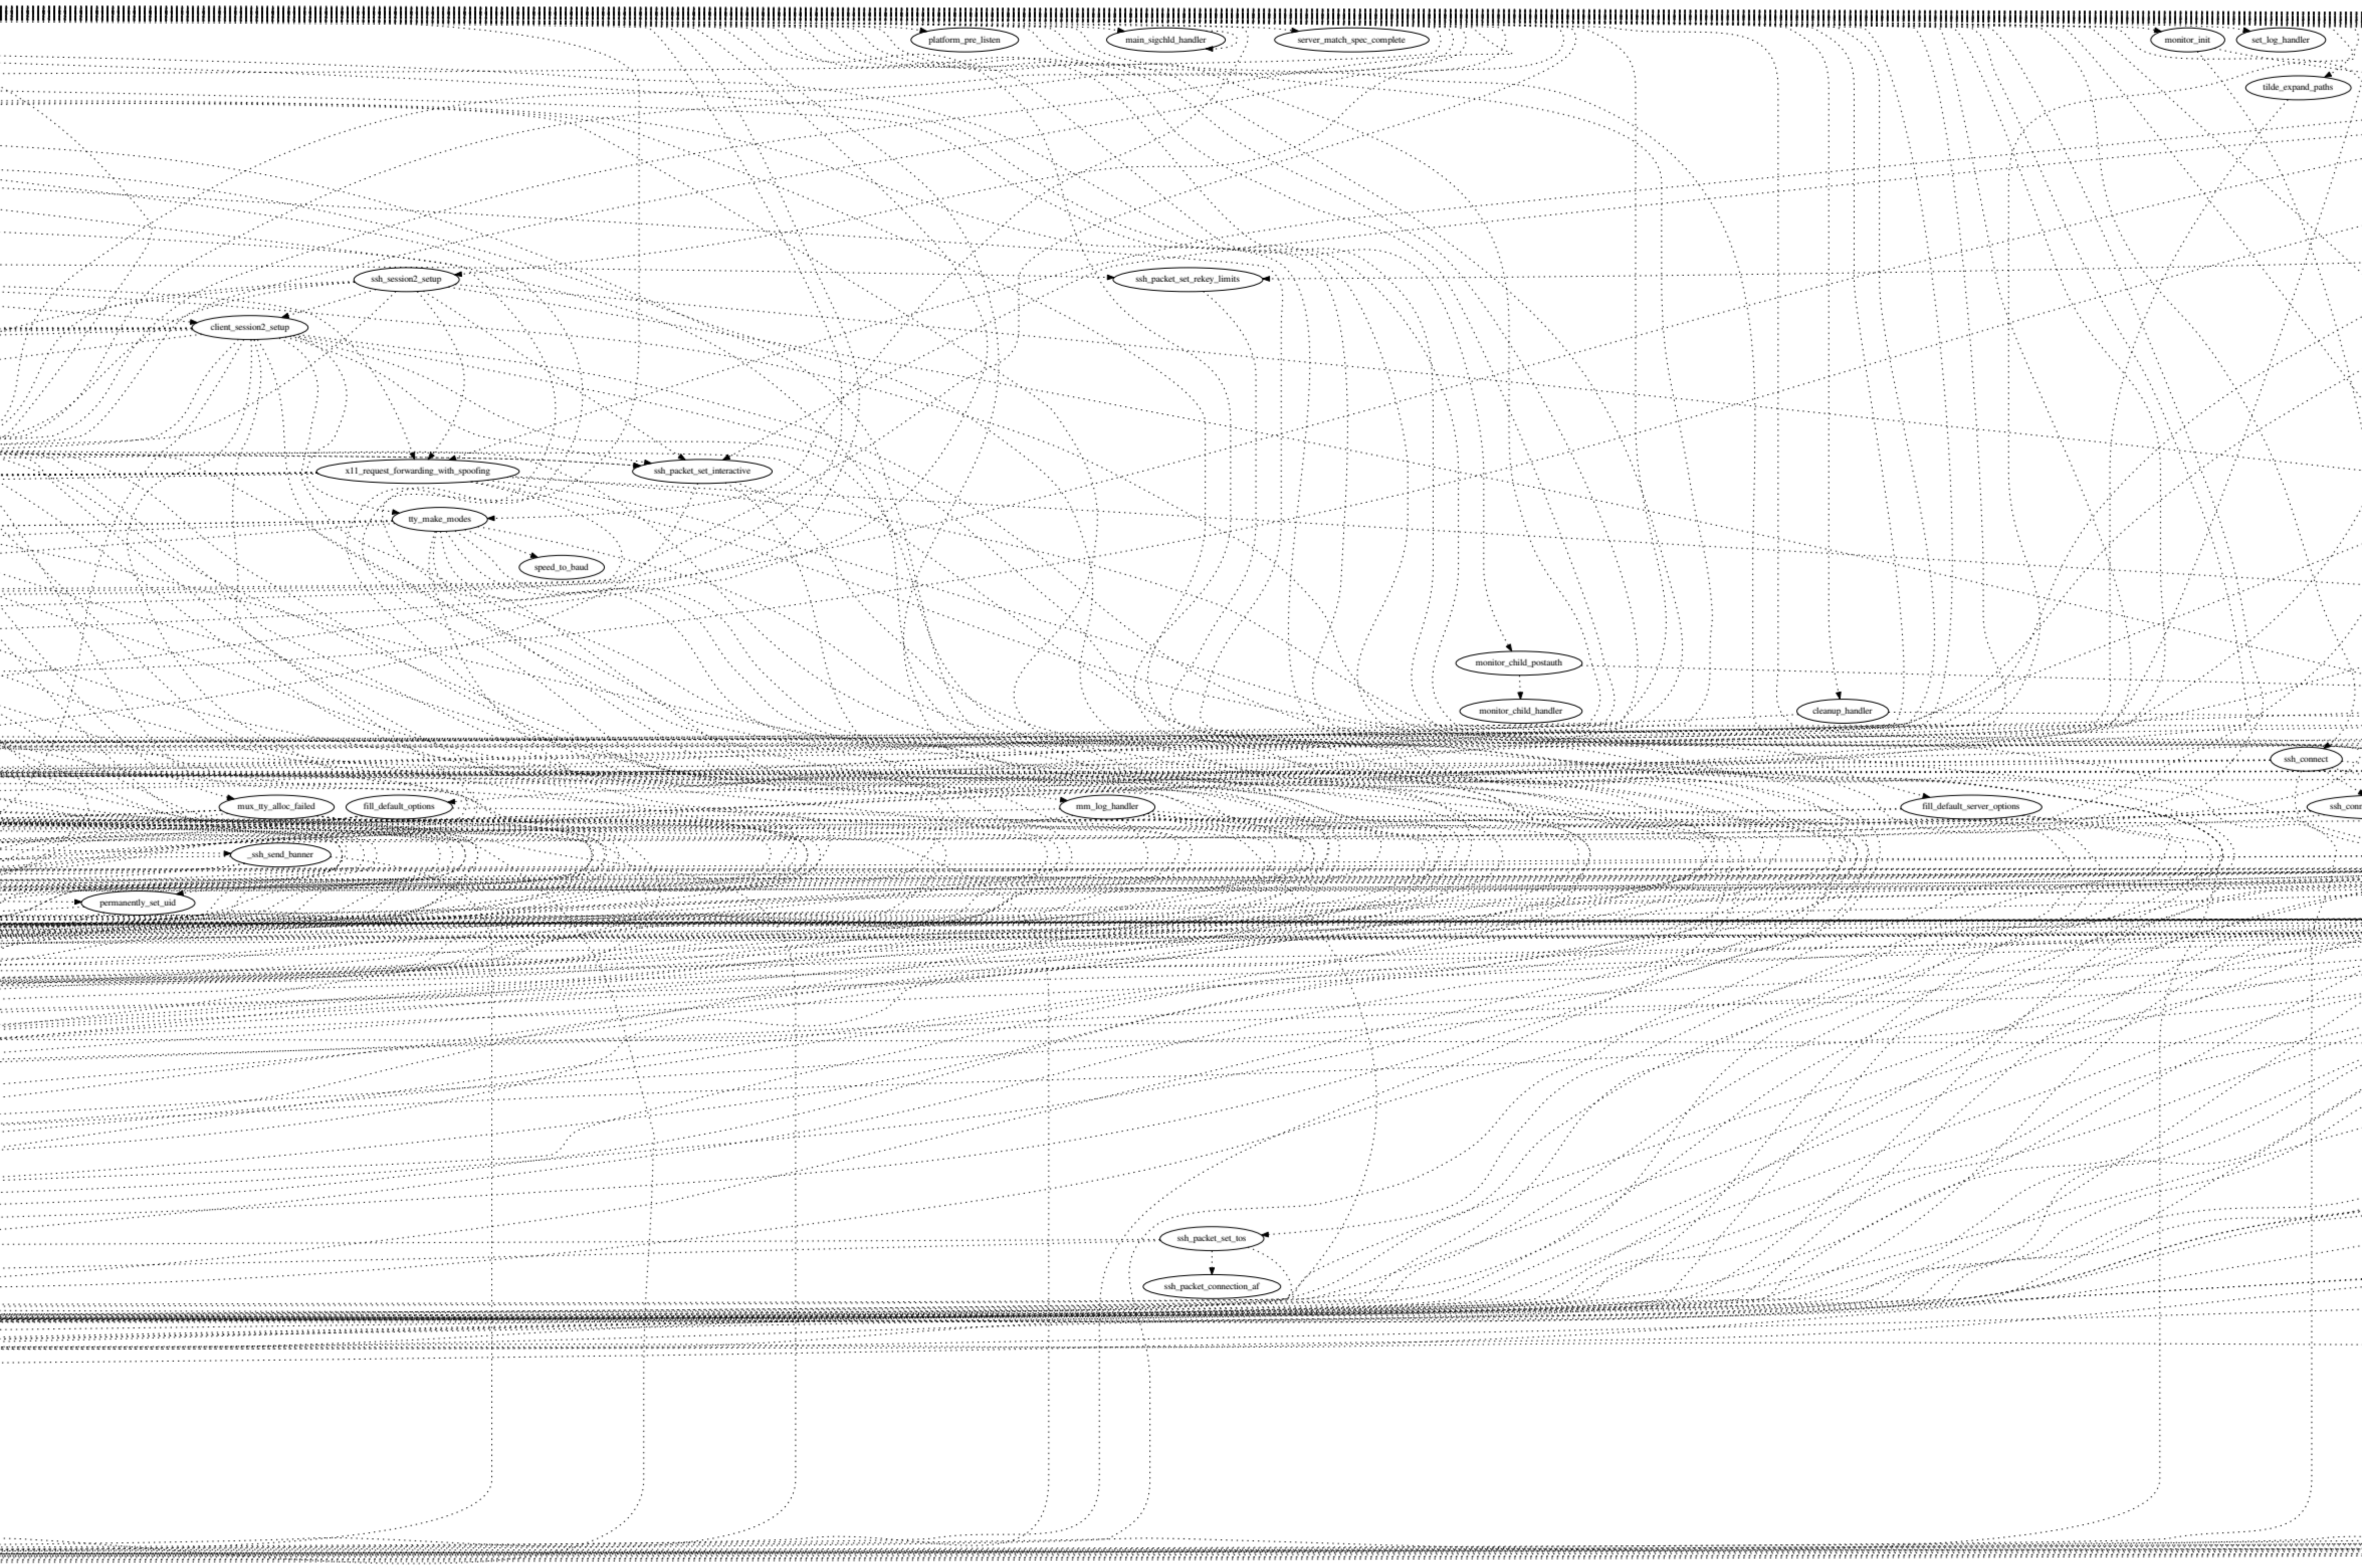
platform_pre_listen
main_sigchld_handler
server_match_spec_complete
monitor_init
set_log_handler
tilde_expand_paths
ssh_session2_setup
ssh_packet_set_rekey_limits
client_session2_setup
x11_request_forwarding_with_spoofing
ssh_packet_set_interactive
tty_make_modes
speed_to_baud
monitor_child_postauth
monitor_child_handler
cleanup_handler
ssh_connect
mux_tty_alloc_failed
fill_default_options
mm_log_handler
fill_default_server_options
ssh_conn
_ssh_send_banner
permanently_set_uid
ssh_packet_set_tos
ssh_packet_connection_af

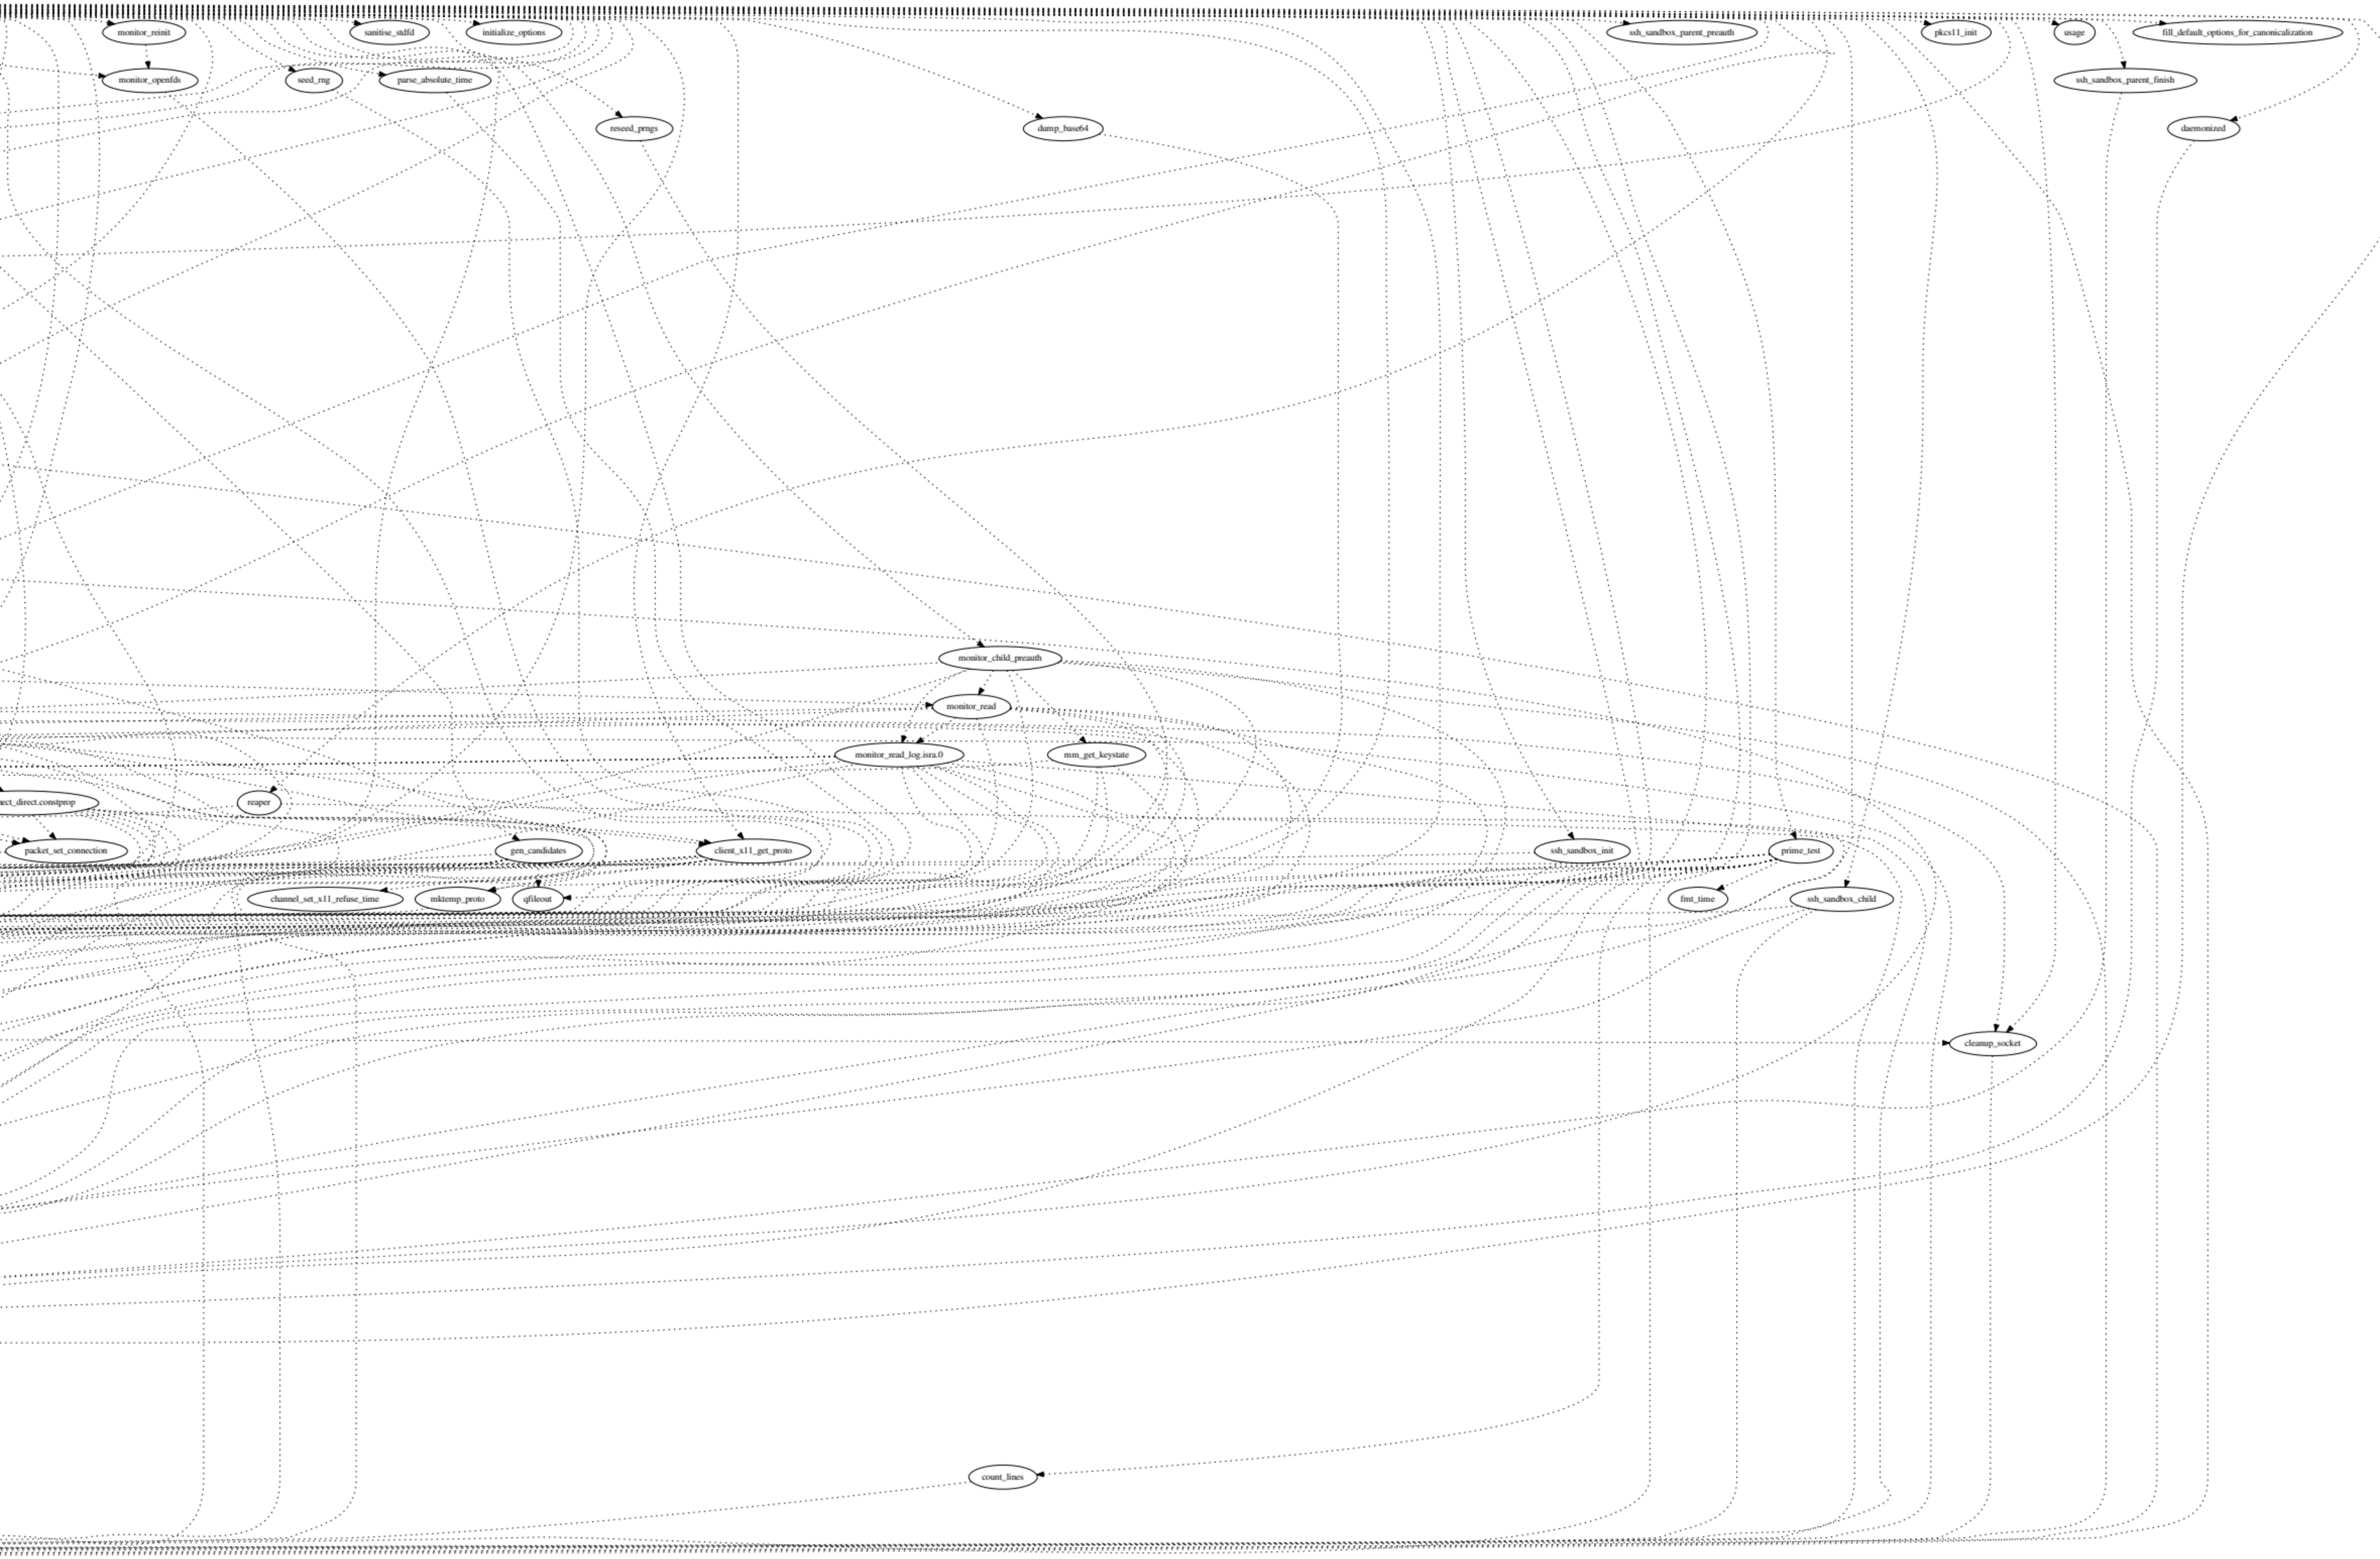
monitor_reinit
sanitise_stdfd
initialize_options
ssh_sandbox_parent_preauth
pkcs11_init
usage
fill_default_options_for_canonicalization
monitor_openfds
seed_rng
parse_absolute_time
ssh_sandbox_parent_finish
reseed_prngs
dump_base64
daemonized
monitor_child_preauth
monitor_read
monitor_read_log.isra.0
mm_get_keystate
ect_direct.constprop
reaper
packet_set_connection
gen_candidates
client_x11_get_proto
ssh_sandbox_init
prime_test
channel_set_x11_refuse_time
mktemp_proto
qfileout
fmt_time
ssh_sandbox_child
cleanup_socket
count_lines

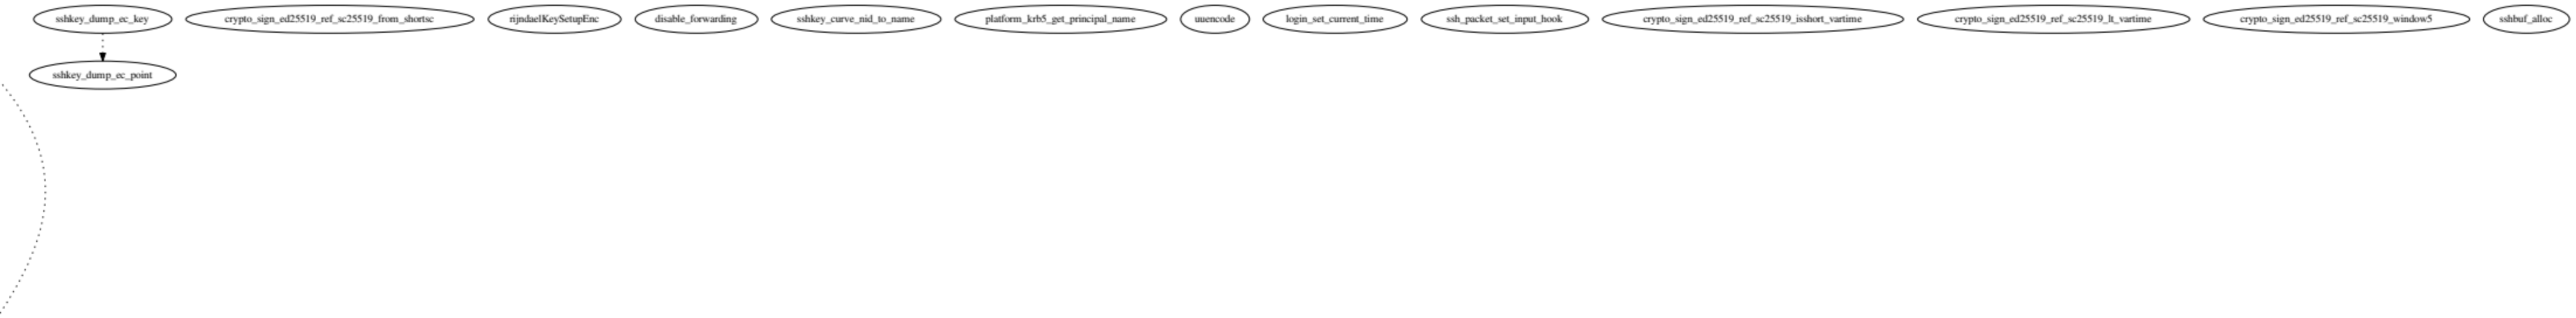
sshkey_dump_ec_key
crypto_sign_ed25519_ref_sc25519_from_shortsc
rijndaelKeySetupEnc
disable_forwarding
sshkey_curve_nid_to_name
platform_krb5_get_principal_name
uuencode
login_set_current_time
ssh_packet_set_input_hook
crypto_sign_ed25519_ref_sc25519_isshort_vartime
crypto_sign_ed25519_ref_sc25519_lt_vartime
crypto_sign_ed25519_ref_sc25519_window5
sshbuf_alloc
sshkey_dump_ec_point


crypto_sign_ed25519_ref_sc25519_sub_nored
rsa_private_decrypt
crypto_sign_ed25519_ref_sc25519_iszero_vartime
sshbuf_avail
ssh_packet_set_protocol_flags
sshbuf_max_size
channel_by_remote_id
get_u16
cipher_get_number
rijndaelEncrypt
cipher_by_number
sshbuf_refcount
cipher_mask_ssh1
put_u16
get_u64
crypto_sign_ed25519_ref_shortsc25519_from16bytes
platform_sys_dir_uid
cipher_set_keyiv

rsa_public_encrypt
bitmap_zero
put_u32_le
mm_sshkey_sign
set_utmp_time
sshkey_type_is_cert
sshbuf_parent